




# OIL ANALYSIS REPORT

Sample Rating Trend

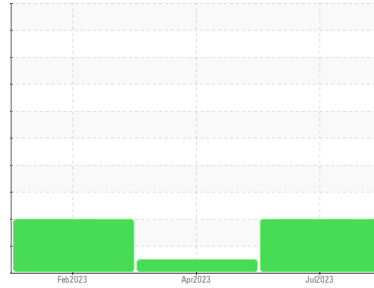

ISO



Machine Id  
**27248**  
 Component  
**Diesel Engine**  
 Fluid  
**NOT GIVEN (--- QTS)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012053</b>	KLM2339466	KLM2339342
Sample Date	Client Info		<b>28 Jul 2023</b>	08 Apr 2023	12 Feb 2023
Machine Age	mls	Client Info	<b>102793</b>	100170	95664
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	48	32
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	8	10
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>0</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>72</b>	49	34
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>68</b>	61	60
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m	<b>1127</b>	1057	957
Calcium	ppm	ASTM D5185m	<b>1030</b>	1007	1098
Phosphorus	ppm	ASTM D5185m	<b>1098</b>	1077	988
Zinc	ppm	ASTM D5185m	<b>1336</b>	1336	1339
Sulfur	ppm	ASTM D5185m	<b>4199</b>	3933	3692

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	8	8
Sodium	ppm	ASTM D5185m	<b>3</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>3</b>	13	14


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.8	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	11.3	11.4
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>20.9</b>	25.4	25.3




# OIL ANALYSIS REPORT


▲ Particle Trend

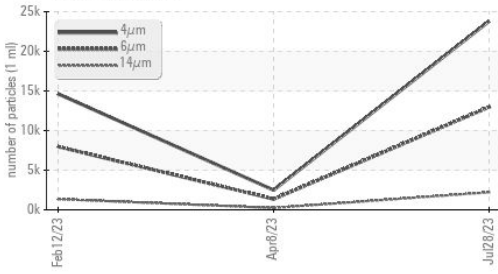


▲ Particle Trend

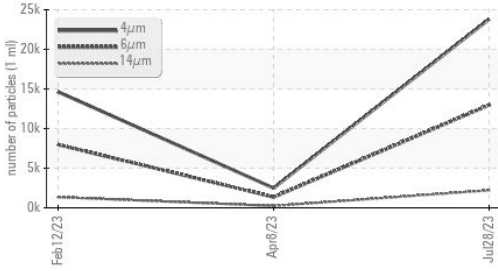

Base Number

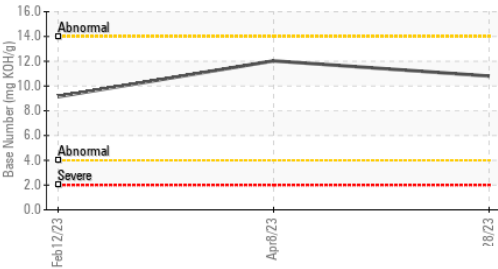

Viscosity @ 100°C

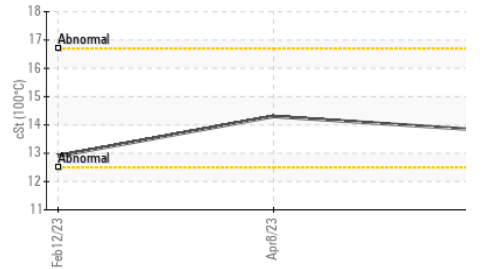

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>23802</b>	2488	14633
Particles >6µm	ASTM D7647	>5000	▲ <b>12966</b>	1355	▲ 7971
Particles >14µm	ASTM D7647	>640	▲ <b>2207</b>	231	▲ 1357
Particles >21µm	ASTM D7647	>160	▲ <b>743</b>	78	▲ 457
Particles >38µm	ASTM D7647	>40	▲ <b>115</b>	12	▲ 71
Particles >71µm	ASTM D7647	>10	<b>12</b>	1	7
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ <b>21/18</b>	18/15	▲ 20/18


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>18.2</b>	23.4	25.3
Base Number (BN)	mg KOH/g ASTM D2896		<b>10.80</b>	12.03	9.14

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		<b>13.8</b>	14.3	12.9

GRAPHS


Ferrous Alloys

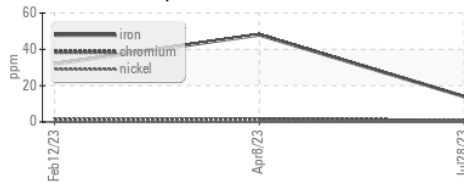


Non-ferrous Metals

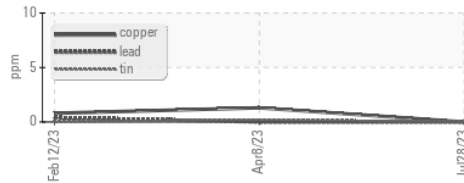


Viscosity @ 100°C

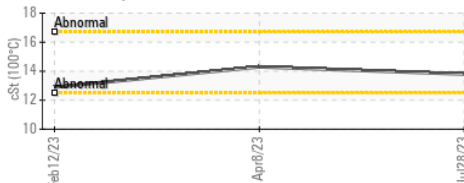

▲ Particle Count

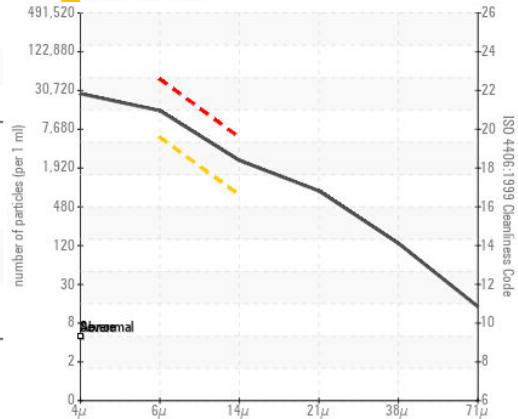

Base Number

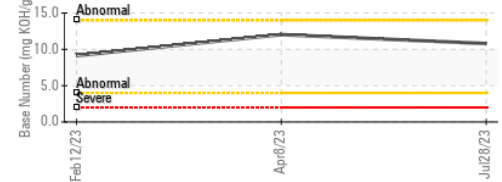

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012053 Received : 14 Aug 2023  
 Lab Number : 05923570 Diagnosed : 16 Aug 2023  
 Unique Number : 10603517 Diagnostician : Angela Borella  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F: