




# OIL ANALYSIS REPORT

Sample Rating Trend

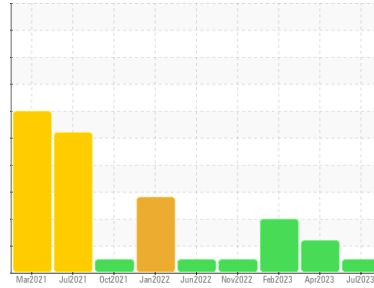

**NORMAL**



Machine Id  
**27306**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0011946</b>	KLM2339303	KLM2339467
Sample Date	Client Info		<b>27 Jul 2023</b>	10 Apr 2023	14 Feb 2023
Machine Age	hrs	Client Info	<b>43845</b>	40256	37661
Oil Age	hrs	Client Info	<b>0</b>	0	37661
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>63</b>	33	15
Chromium	ppm	ASTM D5185m >20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	9	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>6</b>	7	3
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>20</b>	30	68
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>61</b>	52	52
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 450	<b>1045</b>	969	977
Calcium	ppm	ASTM D5185m 3000	<b>1213</b>	1122	1177
Phosphorus	ppm	ASTM D5185m 1150	<b>1087</b>	999	1004
Zinc	ppm	ASTM D5185m 1350	<b>1399</b>	1328	1337
Sulfur	ppm	ASTM D5185m 4250	<b>4105</b>	3838	3972

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	7	5
Sodium	ppm	ASTM D5185m >216	<b>7</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>12</b>	12	4


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.3</b>	0.9	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.4</b>	10.6	7.8
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>28.7</b>	25.1	21.3




# OIL ANALYSIS REPORT


Particle Trend

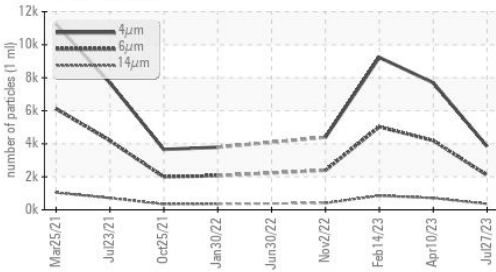


Base Number

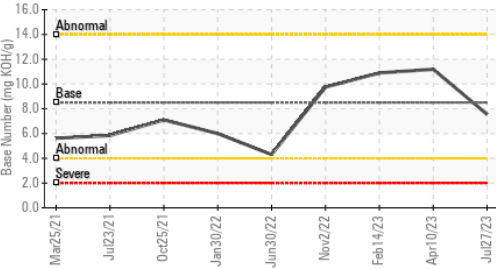

Viscosity @ 100°C

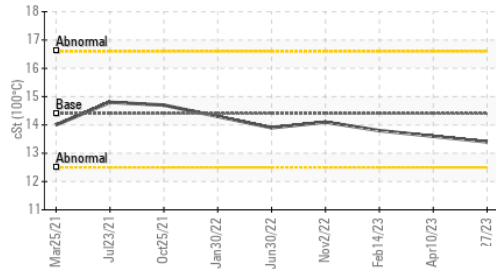

Particle Trend

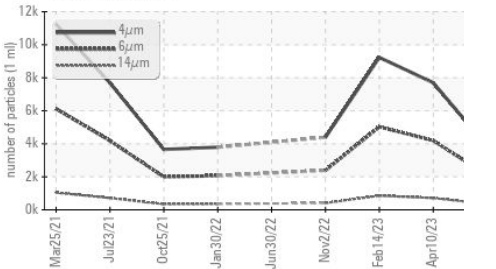

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>3845</b>	7699	9230
Particles >6µm	ASTM D7647	>5000	<b>2095</b>	4194	▲ 5028
Particles >14µm	ASTM D7647	>640	<b>356</b>	▲ 714	▲ 856
Particles >21µm	ASTM D7647	>160	<b>120</b>	▲ 240	▲ 288
Particles >38µm	ASTM D7647	>40	<b>19</b>	37	▲ 45
Particles >71µm	ASTM D7647	>10	<b>2</b>	4	5
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>18/16</b>	▲ 19/17	▲ 20/17


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	<b>29.8</b>	23.7	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.55</b>	11.19	10.89

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.4</b>	13.6	13.8

## GRAPHS


Ferrous Alloys

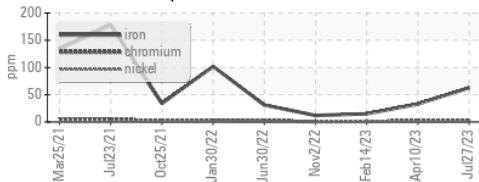


Non-ferrous Metals

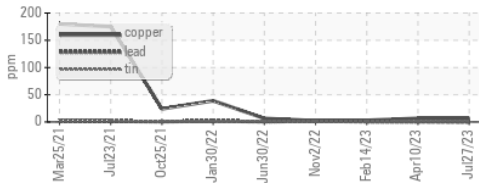


Viscosity @ 100°C

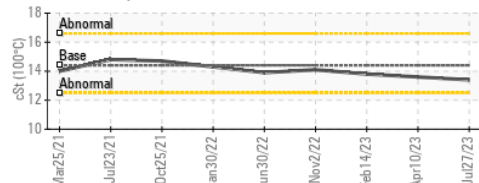

Particle Count

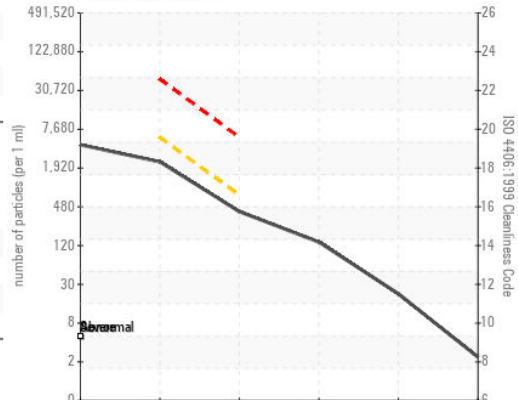

Base Number

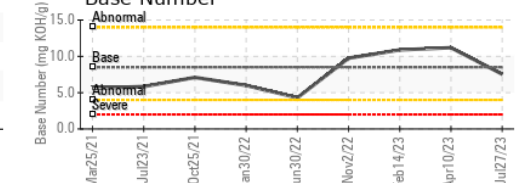

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0011946 **Received** : 14 Aug 2023  
**Lab Number** : 05923580 **Diagnosed** : 16 Aug 2023  
**Unique Number** : 10603527 **Diagnostician** : Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)