




OIL ANALYSIS REPORT

Sample Rating Trend

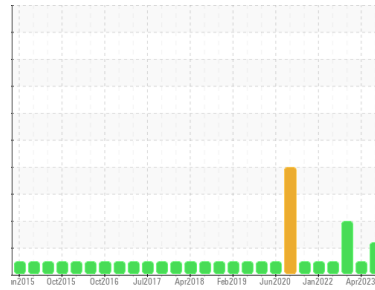

Machine Id
2013 FREIGHTLINER 35135
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is a moderate amount of particulates present in the oil.
- Fluid Condition**
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KL0012058	KLM2339397	KLM2340539
Sample Date	Client Info	27 Jul 2023	10 Apr 2023	12 Feb 2023
Machine Age	mls	Client Info	0	278744
Oil Age	mls	Client Info	0	89038
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	NORMAL	ATTENTION

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	6	5	11
Chromium	ppm ASTM D5185m >20	<1	<1	1
Nickel	ppm ASTM D5185m >4	0	<1	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	1	0	3
Lead	ppm ASTM D5185m >40	0	0	<1
Copper	ppm ASTM D5185m >330	2	1	4
Tin	ppm ASTM D5185m >15	0	0	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	97	107	60
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	62	60	49
Manganese	ppm ASTM D5185m	<1	<1	2
Magnesium	ppm ASTM D5185m 450	1100	1094	910
Calcium	ppm ASTM D5185m 3000	1051	1003	1304
Phosphorus	ppm ASTM D5185m 1150	1083	1063	975
Zinc	ppm ASTM D5185m 1350	1308	1299	1290
Sulfur	ppm ASTM D5185m 4250	4337	4332	3709

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	5	7
Sodium	ppm ASTM D5185m >158	3	2	4
Potassium	ppm ASTM D5185m >20	1	2	4


INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.4	0.4	1
Nitration	Abs/cm *ASTM D7624 >20	6.5	6.3	8.2
Sulfation	Abs/.1mm *ASTM D7415 >30	19.1	19.6	21.7




OIL ANALYSIS REPORT


▲ Particle Trend

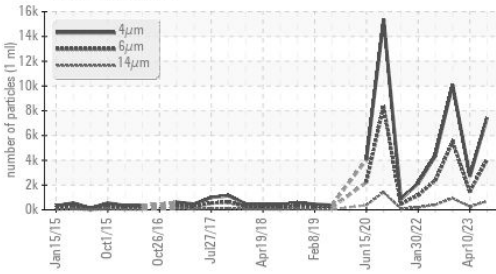


▲ Particle Trend

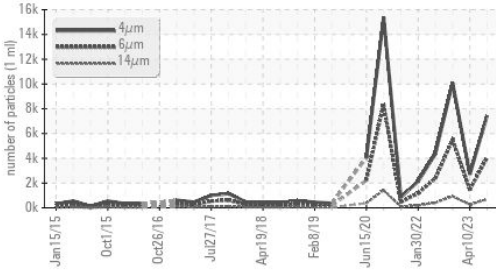

Base Number

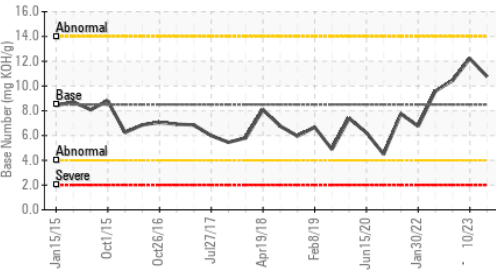

Viscosity @ 100°C

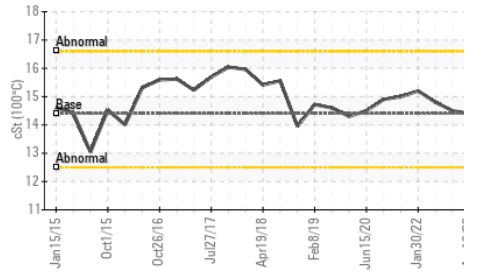

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		7438	2706	10092
Particles >6µm	ASTM D7647	>5000	4052	1474	▲ 5497
Particles >14µm	ASTM D7647	>640	▲ 690	251	▲ 936
Particles >21µm	ASTM D7647	>160	▲ 232	84	▲ 315
Particles >38µm	ASTM D7647	>40	36	13	▲ 49
Particles >71µm	ASTM D7647	>10	4	1	5
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 19/17	18/15	▲ 20/17


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	14.8	14.0	15.4
Base Number (BN)	mg KOH/g ASTM D2896	8.5	10.76	12.21	10.45

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	14.2	14.4	14.5

GRAPHS


Ferrous Alloys

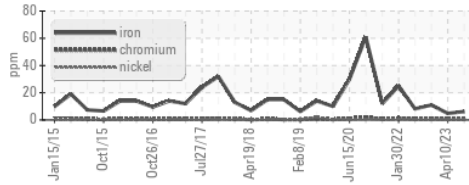


Non-ferrous Metals

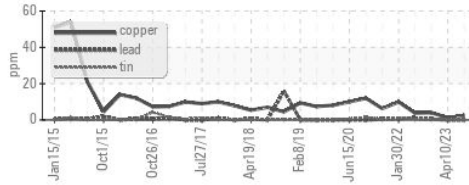


Viscosity @ 100°C

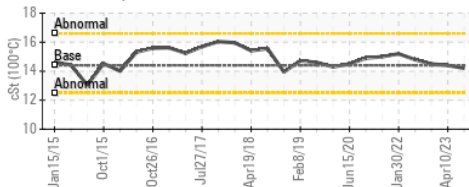

▲ Particle Count

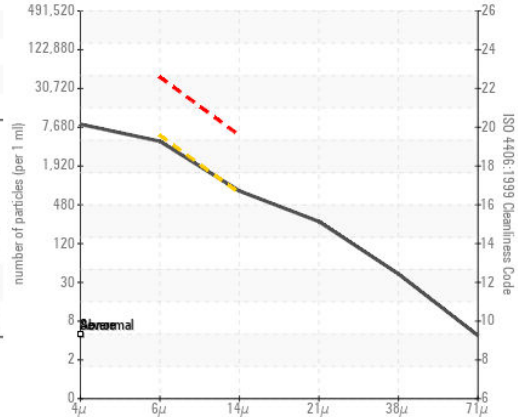

Base Number

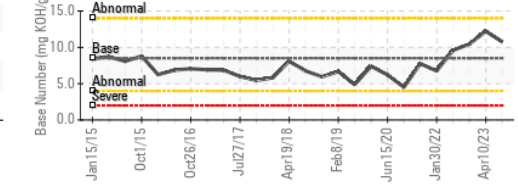

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012058 Received : 14 Aug 2023
 Lab Number : 05923590 Diagnosed : 18 Aug 2023
 Unique Number : 10603537 Diagnostician : Jonathan Hester
 Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)