




OIL ANALYSIS REPORT

Sample Rating Trend

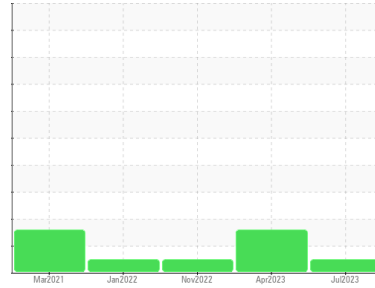

NORMAL



Machine Id
35163

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0012064	KLM2339396	KL0009815
Sample Date	Client Info			27 Jul 2023	10 Apr 2023	04 Nov 2022
Machine Age	mls	Client Info		285196	275602	263356
Oil Age	mls	Client Info		0	0	61430
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	14	42	10
Chromium	ppm	ASTM D5185m	>6	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	9	2
Lead	ppm	ASTM D5185m	>95	0	4	2
Copper	ppm	ASTM D5185m	>85	3	11	2
Tin	ppm	ASTM D5185m	>9	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	40	13	50
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	65	51	47
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	450	1142	927	900
Calcium	ppm	ASTM D5185m	3000	1061	1219	1194
Phosphorus	ppm	ASTM D5185m	1150	1058	981	981
Zinc	ppm	ASTM D5185m	1350	1334	1277	1217
Sulfur	ppm	ASTM D5185m	4250	3905	3498	3833

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	19	5
Sodium	ppm	ASTM D5185m	>216	5	9	2
Potassium	ppm	ASTM D5185m	>20	1	5	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.4	0.8	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.4	11.3	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	25.1	22.7



OIL ANALYSIS REPORT

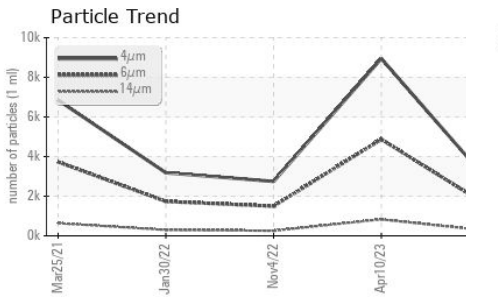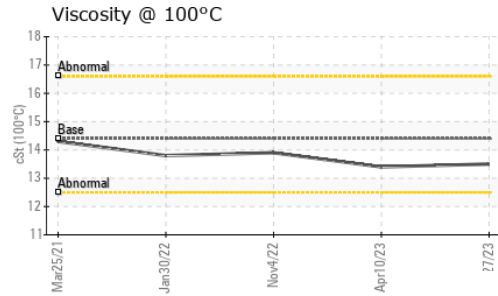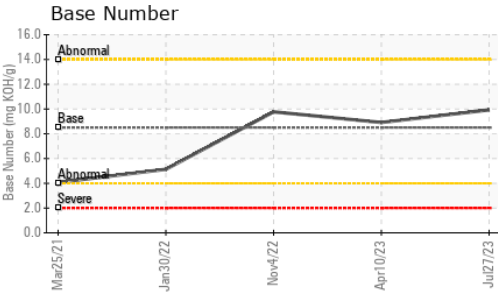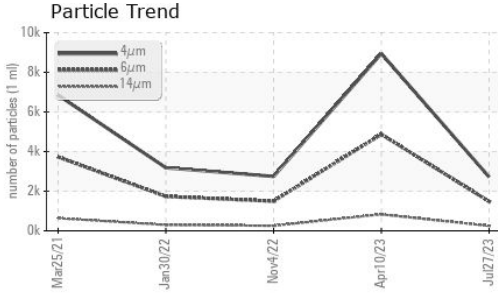






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		2723	8943	2745
Particles >6µm	ASTM D7647	>5000	1483	4872	1495
Particles >14µm	ASTM D7647	>640	252	▲ 829	254
Particles >21µm	ASTM D7647	>160	85	▲ 279	86
Particles >38µm	ASTM D7647	>40	13	▲ 43	13
Particles >71µm	ASTM D7647	>10	1	4	1
Oil Cleanliness	ISO 4406 (c)	>19/16	18/15	▲ 19/17	18/15

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	*ASTM D7414	>25	17.8	21.0	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.93	8.91	9.77

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.4	13.9

GRAPHS

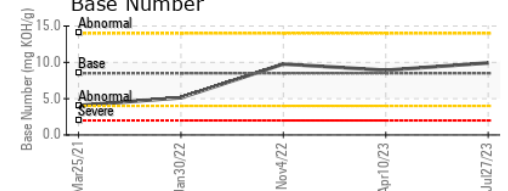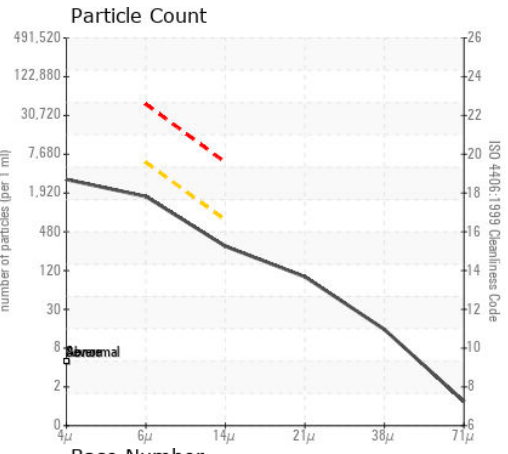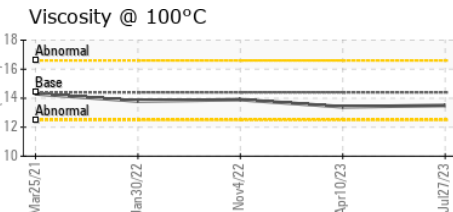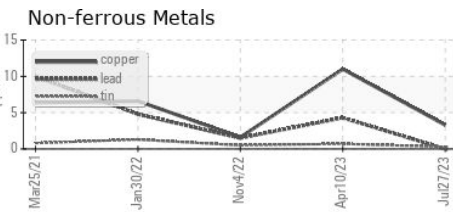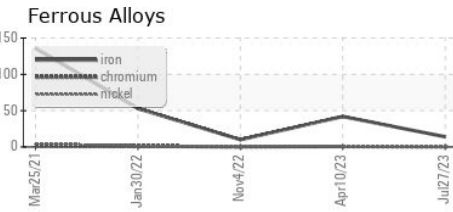

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012064 **Received** : 14 Aug 2023
Lab Number : 05923592 **Diagnosed** : 18 Aug 2023
Unique Number : 10603539 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)