




OIL ANALYSIS REPORT

Sample Rating Trend

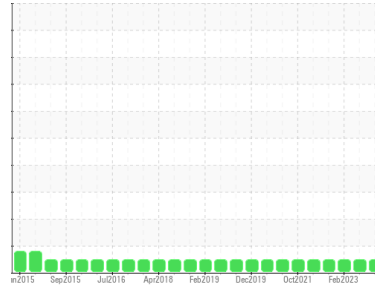

NORMAL



Machine Id
FREIGHTLINER 35137
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012060	KLM2339385	KLM2339317
Sample Date	Client Info		27 Jul 2023	10 Apr 2023	14 Feb 2023
Machine Age	mls	Client Info	225679	220226	220224
Oil Age	mls	Client Info	0	0	40055
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >65	14	31	30
Chromium	ppm	ASTM D5185m >5	<1	2	2
Nickel	ppm	ASTM D5185m >3	0	<1	<1
Titanium	ppm	ASTM D5185m >5	<1	<1	<1
Silver	ppm	ASTM D5185m >2	<1	1	<1
Aluminum	ppm	ASTM D5185m >35	2	4	5
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >180	4	9	9
Tin	ppm	ASTM D5185m >8	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	65	0	2
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	46	5	6
Manganese	ppm	ASTM D5185m	<1	<1	2
Magnesium	ppm	ASTM D5185m 450	895	62	71
Calcium	ppm	ASTM D5185m 3000	1395	2436	2517
Phosphorus	ppm	ASTM D5185m 1150	1017	912	877
Zinc	ppm	ASTM D5185m 1350	1247	1190	1223
Sulfur	ppm	ASTM D5185m 4250	4100	4064	3857

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	6	10	10
Sodium	ppm	ASTM D5185m >158	6	11	10
Potassium	ppm	ASTM D5185m >20	2	5	6

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.9	0.9
Nitration	Abs/cm	*ASTM D7624 >20	7.7	10.6	10.4
Sulfation	Abs./1mm	*ASTM D7415 >30	20.0	25.3	24.4



OIL ANALYSIS REPORT

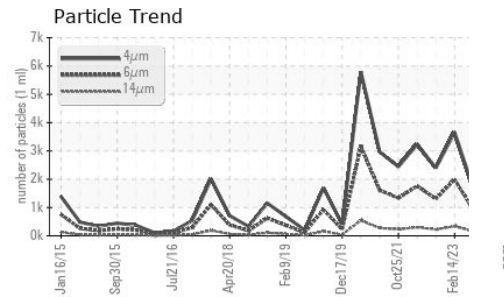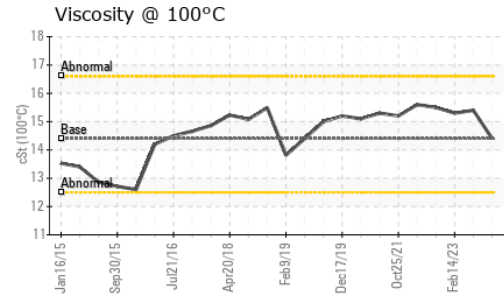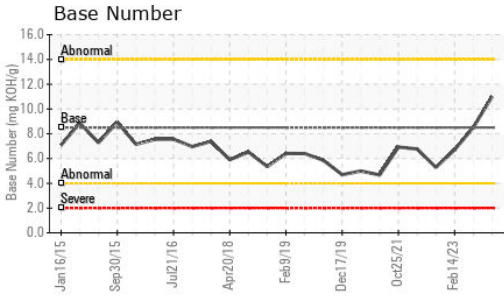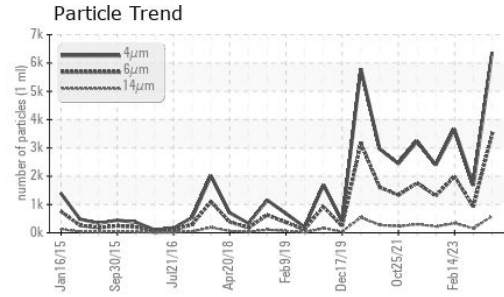




FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		6368	1679	3654
Particles >6µm	ASTM D7647	>5000	3469	915	1990
Particles >14µm	ASTM D7647	>640	590	156	339
Particles >21µm	ASTM D7647	>160	199	52	114
Particles >38µm	ASTM D7647	>40	31	8	18
Particles >71µm	ASTM D7647	>10	3	1	2
Oil Cleanliness	ISO 4406 (c)	>19/16	19/16	17/14	18/16

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	15.1	16.9	16.7
Base Number (BN)	mg KOH/g ASTM D2896	8.5	11.00	8.51	6.71

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	14.4	15.4	15.3

GRAPHS

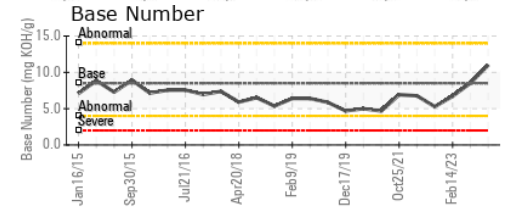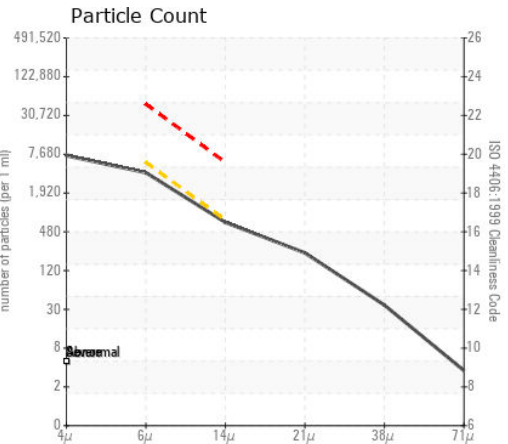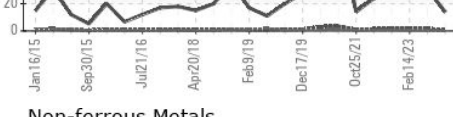

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012060 **Received** : 14 Aug 2023
Lab Number : 05923599 **Diagnosed** : 18 Aug 2023
Unique Number : 10603546 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: PrtCount)

CITY & COUNTY HONOLULU
 99-999 IWAENA RD
 AIEA, HI
 US 96701
 Contact: CLYDE OMIJA
 comija@honolulu.gov
 T: (575)623-9952
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)