




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

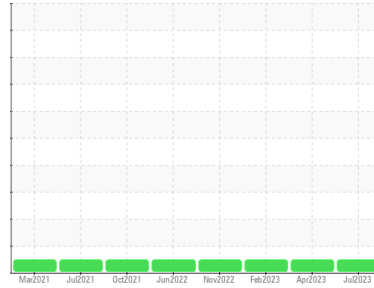

Machine Id  
**35153**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012043</b>	KLM2339361	KLM2339348
Sample Date	Client Info		<b>25 Jul 2023</b>	09 Apr 2023	13 Feb 2023
Machine Age	mls	Client Info	<b>187119</b>	190273	190230
Oil Age	mls	Client Info	<b>0</b>	0	35792
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>65	<b>7</b>	6	14
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>35	<b>2</b>	0	4
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>180	<b>2</b>	1	5
Tin	ppm	ASTM D5185m	>8	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>77</b>	100	32
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>64</b>	62	53
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	450	<b>1083</b>	1082	949
Calcium	ppm	ASTM D5185m	3000	<b>1163</b>	1119	1348
Phosphorus	ppm	ASTM D5185m	1150	<b>1061</b>	1046	961
Zinc	ppm	ASTM D5185m	1350	<b>1285</b>	1286	1305
Sulfur	ppm	ASTM D5185m	4250	<b>4267</b>	4268	3708

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>4</b>	4	7
Sodium	ppm	ASTM D5185m	>216	<b>3</b>	2	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	5


## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.9</b>	6.5	9.4
Sulfation	Abs./1mm	*ASTM D7415	>30	<b>19.0</b>	19.6	21.7




# OIL ANALYSIS REPORT


Particle Trend

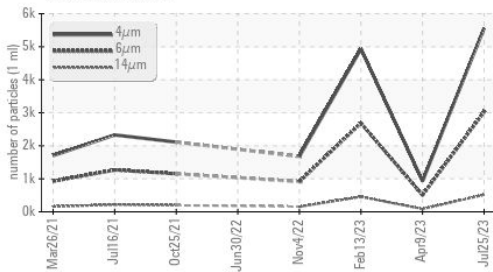


Base Number

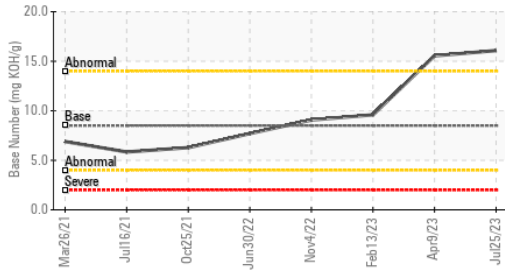

Viscosity @ 100°C

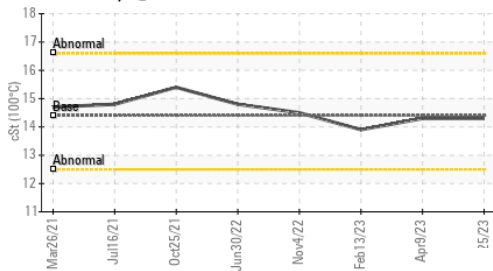

Particle Trend

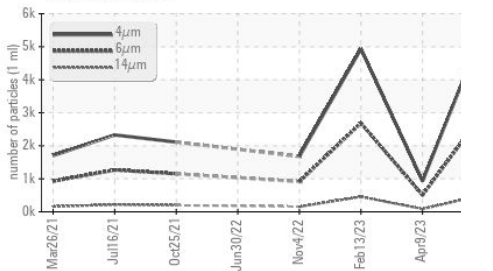

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>5559</b>	931	4933
Particles >6µm	ASTM D7647	>5000	<b>3028</b>	507	2687
Particles >14µm	ASTM D7647	>640	<b>515</b>	86	457
Particles >21µm	ASTM D7647	>160	<b>174</b>	29	154
Particles >38µm	ASTM D7647	>40	<b>27</b>	4	24
Particles >71µm	ASTM D7647	>10	<b>3</b>	0	2
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>19/16</b>	16/14	19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.8</b>	15.0	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>16.08</b>	15.55	9.59

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.3</b>	14.3	13.9

GRAPHS


Ferrous Alloys

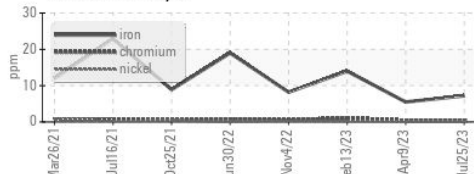


Non-ferrous Metals

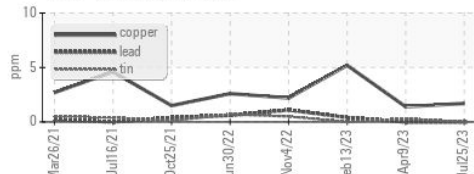


Viscosity @ 100°C

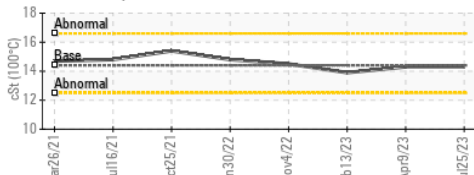

Particle Count

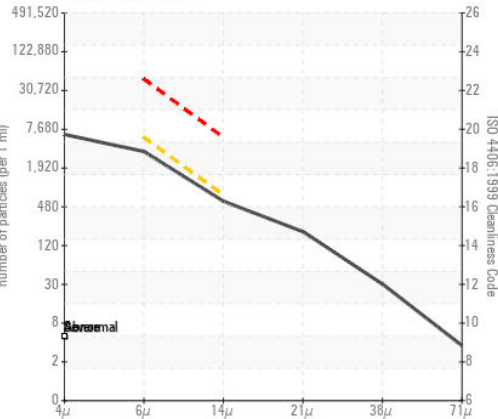

Base Number

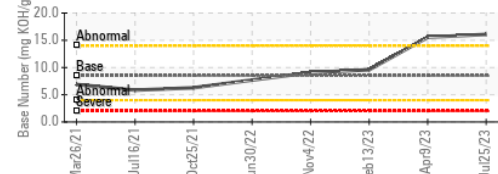

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012043  
 Lab Number : 05923608  
 Unique Number : 10603555  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)