




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/3/EG - TRUCK-OFF-HWY-HEAVY HAUL**  
 Machine Id  
**69.10 [OKLAHOMA^3^EG - TRUCK-OFF-HWY-HEAVY HAUL]**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**MOBIL MOBILGEAR 629 (--- GAL)**

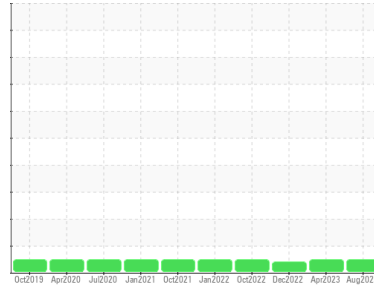

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0778382</b>	WC0800806	WC0758669
Sample Date	Client Info		<b>05 Aug 2023</b>	06 Apr 2023	21 Dec 2022
Machine Age	hrs	Client Info	<b>9867</b>	9135	8996
Oil Age	hrs	Client Info	<b>653</b>	76	8662
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>11</b>	232	258
Chromium	ppm	ASTM D5185m >10	<b>0</b>	2	3
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	4	5
Titanium	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>&lt;1</b>	0	1
Lead	ppm	ASTM D5185m >10	<b>0</b>	1	2
Copper	ppm	ASTM D5185m >75	<b>&lt;1</b>	12	13
Tin	ppm	ASTM D5185m >8	<b>0</b>	2	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>2</b>	96	99
Barium	ppm	ASTM D5185m	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	1	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	3	3
Magnesium	ppm	ASTM D5185m	<b>0</b>	6	4
Calcium	ppm	ASTM D5185m	<b>30</b>	515	509
Phosphorus	ppm	ASTM D5185m	<b>414</b>	379	395
Zinc	ppm	ASTM D5185m	<b>7</b>	84	94
Sulfur	ppm	ASTM D5185m	<b>178</b>	13070	13079

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>29</b>	16	16
Sodium	ppm	ASTM D5185m	<b>0</b>	6	6
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	<1

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>MODER</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 150	<b>157</b>	288	286






# OIL ANALYSIS REPORT

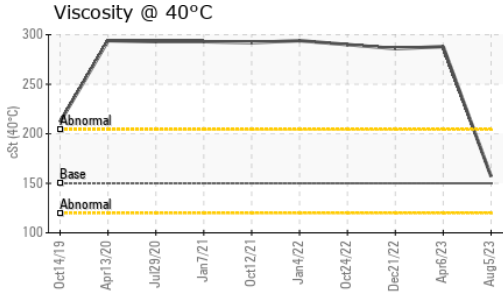

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

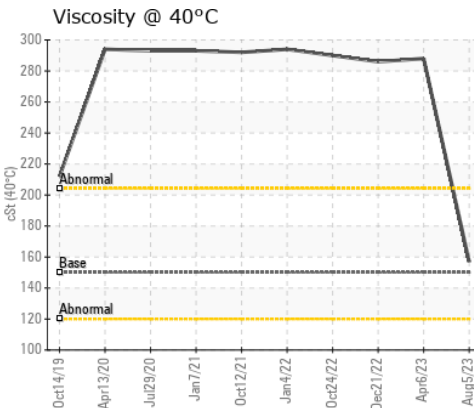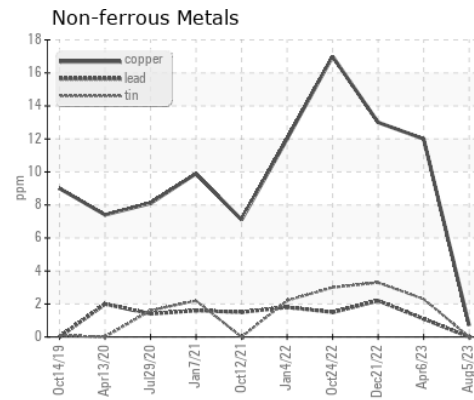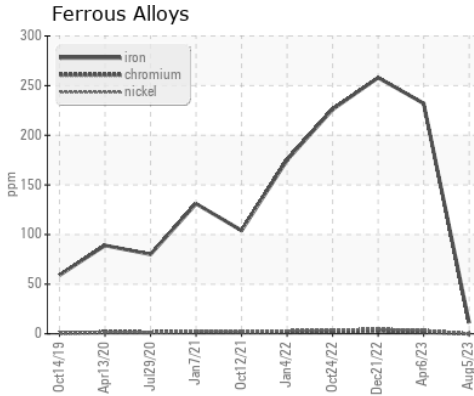

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0778382  
**Lab Number** : 05923723  
**Unique Number** : 10603670  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)