


KENWORTH 775

Component Diesel Engine Fluid MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

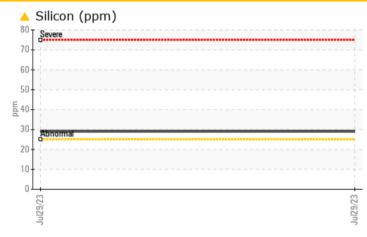

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status		ABNORMAL							
Silicon	ppm	ASTM D5185m	>25	<u> </u>					


Customer Id: KGRCHO Sample No.: WC0724733 Lab Number: 05923971 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

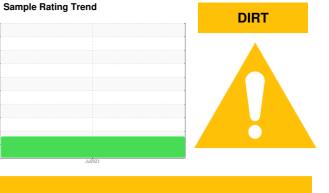

RECOMMENDED ACTIONS								
Action	Status	Date	Done By	Description				
Change Fluid			?	Oil and filter change at the time of sampling has been noted.				
Change Filter			?	Oil and filter change at the time of sampling has been noted.				

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

DIRT

Machine Id KENWORTH 775 Component

Diesel Engine

MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


IATION	method	limit/base	current	history1	history2
	Client Info		WC0724733		
	Client Info		29 Jul 2023		
mls	Client Info		873020		
mls	Client Info		9000		
	Client Info		Changed		
			ABNORMAL		
J	method	limit/base	current	history1	history2
	WC Method	>5	<1.0		
	WC Method		NEG		
	method	limit/base	current	history1	history2
ppm	ASTM D5185m	>100	15		
ppm	ASTM D5185m	>20	<1		
ppm	ASTM D5185m	>4	0		
ppm	ASTM D5185m		<1		
ppm	ASTM D5185m	>3	0		
ppm	ASTM D5185m	>20	2		
ppm	ASTM D5185m	>40	3		
ppm	ASTM D5185m	>330	3		
ppm	ASTM D5185m	>15	1		
ppm	ASTM D5185m		0		
ppm	ASTM D5185m		0		
	method	limit/base	current	history1	history2
ppm	ASTM D5185m	0	52		
ppm	ASTM D5185m	0	0		
ppm	ASTM D5185m	0	71		
ppm	ASTM D5185m		1		
ppm	ASTM D5185m	0	979		
ppm	ASTM D5185m		1355		
ppm			1000		
pp	ASTM D5185m		1087		
ppm	ASTM D5185m ASTM D5185m				
			1087		
ppm	ASTM D5185m	limit/base	1087 1367		
ppm	ASTM D5185m ASTM D5185m		1087 1367 4074		
ppm ppm	ASTM D5185m ASTM D5185m method		1087 1367 4074 current	 history1	 history2
ppm ppm	ASTM D5185m ASTM D5185m method ASTM D5185m		1087 1367 4074 current 29	 history1	 history2
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m	>25	1087 1367 4074	 history1 	 history2
ppm ppm ppm ppm	ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	1087 1367 4074 ▲ 29 8 7	 history1 	 history2
ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20 limit/base	1087 1367 4074 ▲ 29 8 7 20 20 20 20 20 20 20 20 20 20 20 20 20	 history1 history1	 history2 history2
ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method *ASTM D7844	>25 >20 limit/base >3	1087 1367 4074 ▲ 29 8 7 current 0.1	 history1 history1 	 history2 history2
ppm ppm ppm ppm ppm ppm ppm % Abs/cm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method *ASTM D7844 *ASTM D7624	>25 >20 limit/base >3 >20	1087 1367 4074	 history1 history1 	 history2 history2 history2
ppm ppm ppm ppm ppm ppm % Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7844 *ASTM D7844	>25 >20 limit/base >3 >20 >30	1087 1367 4074	 history1 history1 	 history2 history2
	mls mls mls ppm ppm ppm ppm ppm ppm ppm ppm ppm pp	Client Info Client Info mls Client Info Client Info Client Info Client Info Client Info Client Info Client Info Client Info WC Method WC Method WC Method WC Method WC Method MC Method MC Method STM D5185m ppm ASTM D5185m	Client InfoClient InfomlsClient InfomlsClient InfoClient InfoClient InfoClient InfoClient InfoClient InfoClient InfoClient InfoClient InfoWC Method>5WC Method>5WC MethodSameppmASTM D5185mppmASTM D51	Client InfoWC0724733Client Info29 Jul 2023mlsClient Info873020mlsClient Info9000Client InfoChangedClient InfoChangedClient InfoChangedClient InfoChangedClient InfoChangedClient InfoChangedWC Method>5VC Method>5WC MethodSVC MethodSPpmASTM D5185mPpmASTM D5185mPpm <t< td=""><td>Client Info WC0724733 Client Info 29 Jul 2023 mls Client Info 873020 mls Client Info 9000 Client Info 9000 Client Info Changed Client Info Mc Mathetitititititititititititititititititit</td></t<>	Client Info WC0724733 Client Info 29 Jul 2023 mls Client Info 873020 mls Client Info 9000 Client Info 9000 Client Info Changed Client Info Mc Mathetitititititititititititititititititit



OIL ANALYSIS REPORT



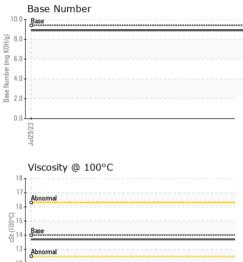

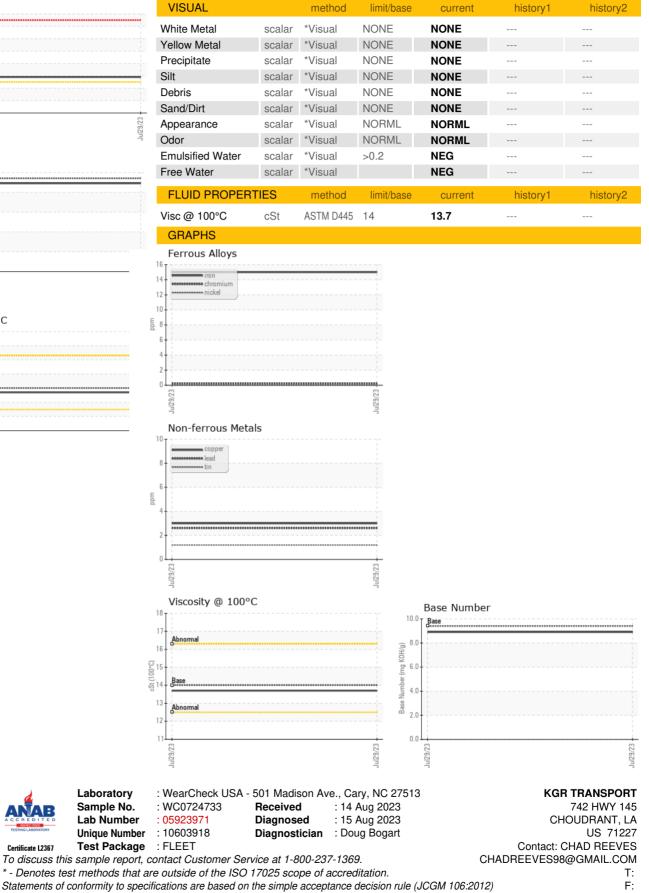

Certificate L2367

Contact/Location: CHAD REEVES - KGRCHO