


OIL ANALYSIS REPORT

Sample Rating Trend







GT 0701 GT 0701

Component **Turbine**

Fluid

MOBIL JET OIL II (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the sample is suitable for further

y2016 Jan2019 Jun2019 Nov2019 Jan2020 Jun2021 Apr2022 Nov2022						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		HLC0002616	HLC0001944	HLC0001835
Sample Date		Client Info		06 Aug 2023	07 Apr 2023	02 Mar 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>15	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m	>5	0	0	0
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		0	4	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		2946	2839	2706
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		2	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	13
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		404	408	594
Particles >6µm		ASTM D7647	>1300	125	122	122
Particles >14µm		ASTM D7647	>160	10	15	8
Particles >21µm		ASTM D7647	>40	3	3	2
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/14	16/14/10	16/14/11	16/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KOH/g ASTM D8045 0.03


0.162

0.093

0.06



OIL ANALYSIS REPORT

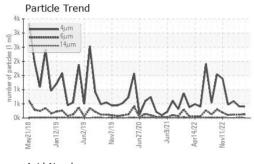

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
	150	ام مالم مما	li.ee it/le = = =		la i a t a un u d	h:ataw.O


	111111	iiiii				
mal						
6 6	19	20	212	22	22	
Jan12, Jun2,	Nov7	Jun27,	Jung	Apr14,	Nov11,	
	12	61/2	81/3	02/19	02/19	779 720 722 722 722


FLUID PROPERT	IES	method			history1	histor
Visc @ 40°C	cSt	ASTM D445	27.6	25.1	25.3	25.5


Color **Bottom**

SAMPLE IMAGES







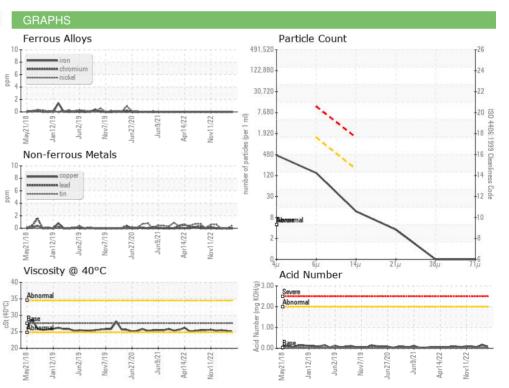





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : HLC0002616 : 05924183

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: 10604130

Received Diagnosed Diagnostician : Don Baldridge

: 14 Aug 2023 : 15 Aug 2023 HILCORP EXPLORATION ALASKA - MILNE POINT 1000 MILNE POINT RD

PRUDOE BAY, AK US 99734 Contact: Evan Reilly

evan.reilly@hilcorp.com T: (907)670-3231

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: