




# PROBLEM SUMMARY

## Sample Rating Trend

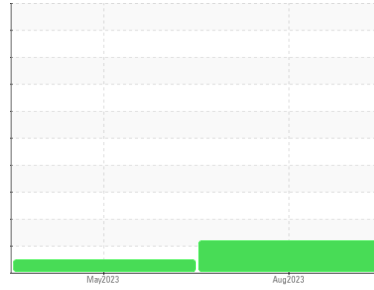

ISO




Machine Id  
**E-5 E-5**

Component  
**Lube System**

Fluid  
**MOBIL DTE OIL EXTRA HEAVY (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

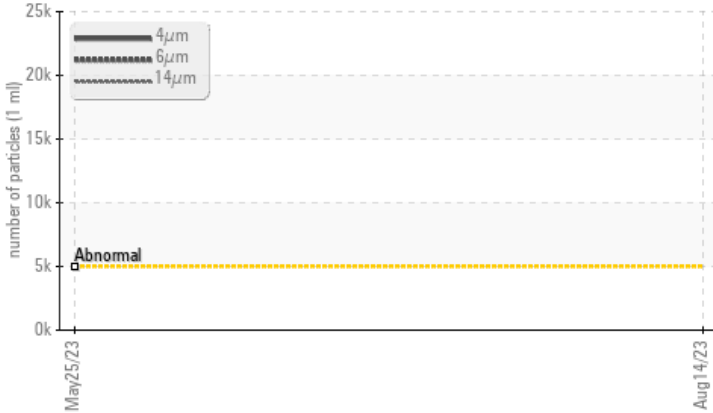

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	---
Particles >4µm	ASTM D7647	>5000	▲ 23390	---	---
Particles >6µm	ASTM D7647	>1300	▲ 3251	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/19/13	---	---

Customer Id: TESAUSTLC  
Sample No.: TLC0001001  
Lab Number: 05924185  
Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS

25 May 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

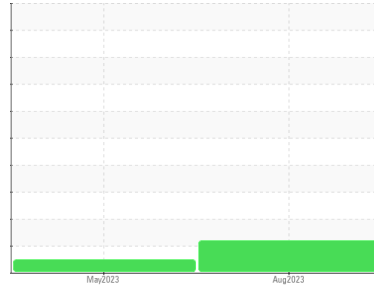

ISO



Machine Id

**E-5 E-5**

Component

**Lube System**

Fluid

**MOBIL DTE OIL EXTRA HEAVY (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TLC0001001</b>	TLC0001160	---
Sample Date	Client Info			<b>14 Aug 2023</b>	25 May 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	5	---
Copper	ppm	ASTM D5185m	>20	<b>1</b>	7	---
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	3	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>8</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>107</b>	4	---
Phosphorus	ppm	ASTM D5185m		<b>416</b>	9	---
Zinc	ppm	ASTM D5185m		<b>520</b>	5	---
Sulfur	ppm	ASTM D5185m		<b>11000</b>	4795	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>8</b>	12	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>▲ 23390</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 3251</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>48</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>11</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 22/19/13</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.86</b>	0.34	---



# OIL ANALYSIS REPORT


## Particle Trend




## Particle Trend



## Acid Number

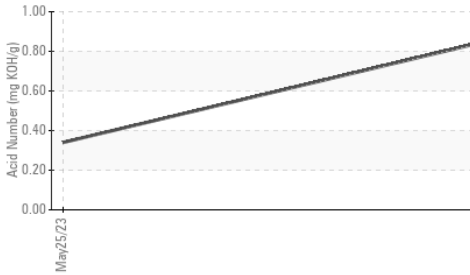

## Viscosity @ 40°C

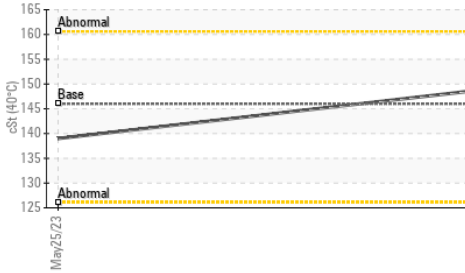

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 146	149	139	---

## SAMPLE IMAGES


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS


### Ferrous Alloys

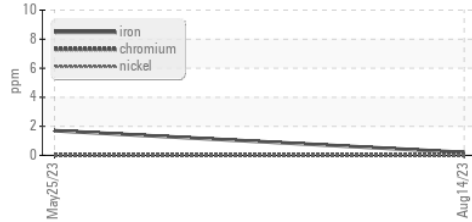


### Non-ferrous Metals

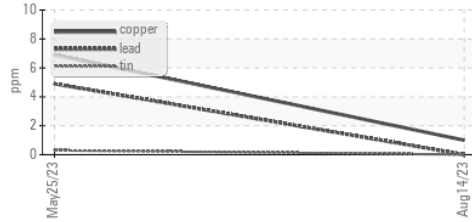


### Viscosity @ 40°C

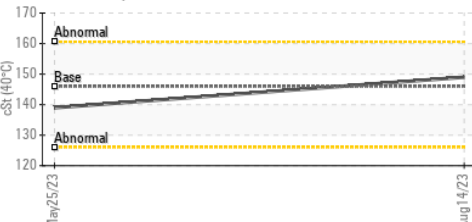

### Particle Count

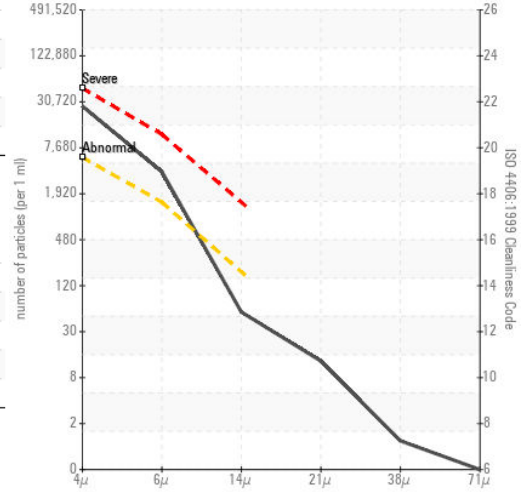

### Acid Number

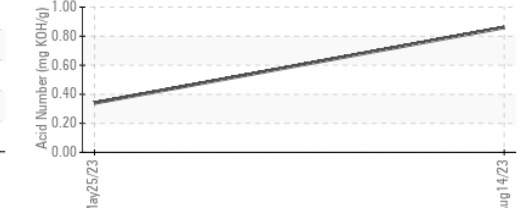

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : TLC0001001 Received : 14 Aug 2023  
 Lab Number : 05924185 Diagnosed : 15 Aug 2023  
 Unique Number : 10604132 Diagnostician : Doug Bogart  
 Test Package : PLANT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**TESLA**  
 1 Tesla Road, BIW E58  
 Austin, TX  
 US 78725  
 Contact: Dave Mitchell  
 davmitchell@tesla.com  
 T: (260)226-1968  
 F: