

OIL ANALYSIS REPORT

Sample Rating Trend





W-2 W-2

Component **Hydraulic System**

AW HYDRAULIC OIL ISO 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		L	May2023	Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TLC0001005	TLC0001155	
Sample Date		Client Info		14 Aug 2023	10 May 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	0	<1	
Lead	ppm	ASTM D5185m	>20	0	0	
Copper	ppm	ASTM D5185m	>20	0	0	
Tin	ppm	ASTM D5185m	>20	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	
Barium	ppm	ASTM D5185m	5	0	0	
Molybdenum	ppm	ASTM D5185m	5	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	25	52	54	
Calcium	ppm	ASTM D5185m	200	10	12	
Phosphorus	ppm	ASTM D5185m	300	250	251	
Zinc	ppm	ASTM D5185m	370	290	300	
Sulfur	ppm	ASTM D5185m	2500	1021	1120	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	1	
Sodium	ppm	ASTM D5185m		<1	<1	
Potassium	ppm	ASTM D5185m	>20	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1570	<u>^</u> 22064	
Particles >6µm		ASTM D7647	>1300	439	<u>▲</u> 7607	
Particles >14µm		ASTM D7647	>160	31	▲ 332	
Particles >21µm		ASTM D7647	>40	6	29	
Particles >38µm		ASTM D7647	>10	0	2	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	<u>^</u> 22/20/16	
FLUID DEGRADA	ATION _	method	limit/base	current	history1	history2
A 1111 1 (6:0)		10TH Dog:-				


Acid Number (AN) mg KOH/g ASTM D8045 0.57

0.24

0.29



OIL ANALYSIS REPORT

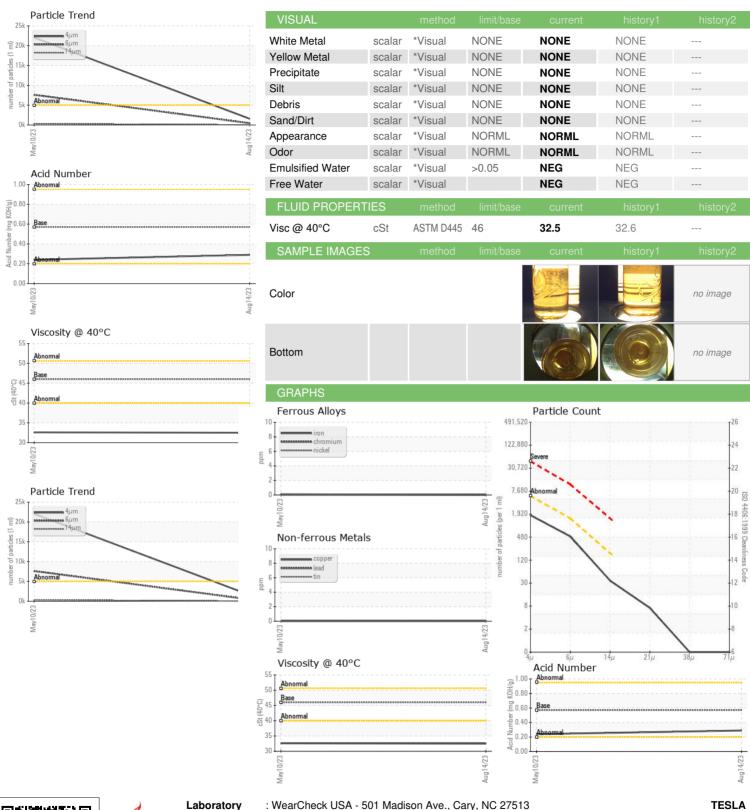



Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05924193

: TLC0001005 : 10604140 Test Package : PLANT

Received : 14 Aug 2023 Diagnosed : 15 Aug 2023 : Doug Bogart Diagnostician

Austin, TX US 78725 Contact: Dave Mitchell davmitchell@tesla.com T: (260)226-1968 F:

1 Tesla Road, BIW E58

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)