

OIL ANALYSIS REPORT

Sample Rating Trend



BT261 - CAPITOL SUPPLY

Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0708522	WC0698904	WC0679396
Sample Date		Client Info		14 Aug 2023	31 Oct 2022	14 Aug 2022
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Oil Changed	9.0	Client Info		N/A	Not Changd	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5	5	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m	>10	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum		ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
	ppm	ASTM D5185m		2	2	2
Copper Tin	ppm	ASTM D5185m	>75	0	2	2
	ppm	ASTM D5185m	>10	0 		
Antimony Vanadium	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m				
Cadmium	ppm			0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	<1
Barium	ppm		5	0	1	0
Molybdenum	ppm	ASTM D5185m	5	0	0	<1
Manganese	ppm	ASTM D5185m	05	0	0	0
Magnesium	ppm	ASTM D5185m	25	0	<1	<1
Calcium	ppm	ASTM D5185m	200	47	45	46
Phosphorus	ppm	ASTM D5185m	300	356	342	353
Zinc	ppm	ASTM D5185m	370	449	456	461
Sulfur	ppm	ASTM D5185m		5270	4865	4583
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	<1	<1
Sodium	ppm	ASTM D5185m		1	0	<1
Potassium	ppm	ASTM D5185m	>20	0	1	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	388	▲ 5632	1064
Particles >6µm		ASTM D7647	>1300	69	829	151
Particles >14µm		ASTM D7647	>160	9	27	22
Particles >21µm		ASTM D7647	>40	2	8	8
Particles >38µm		ASTM D7647	>10	0	2	0
Particles >71µm		ASTM D7647	>3	0	1	0
		ISO 4406 (c)	>19/17/14	16/13/10	🔺 20/17/12	17/14/12
Oil Cleanliness		130 4400 (C)	210/11/14	10/13/10	20/17/12	
Oil Cleanliness FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT







Aug14/22

0ct31/22

0ct31/22

Ba -25 32

Abno

Jun24/21

Jan 10/22

Particle Trend

30

28

26

r of particles (1 ml) 10k

umhar


5

0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	36.1	36.0	36.3
Visc @ 100°C	cSt	ASTM D445	5.4	7	6.9	7.1
Viscosity Index (VI)	Scale	ASTM D2270	102	158	154	162
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color

Bottom

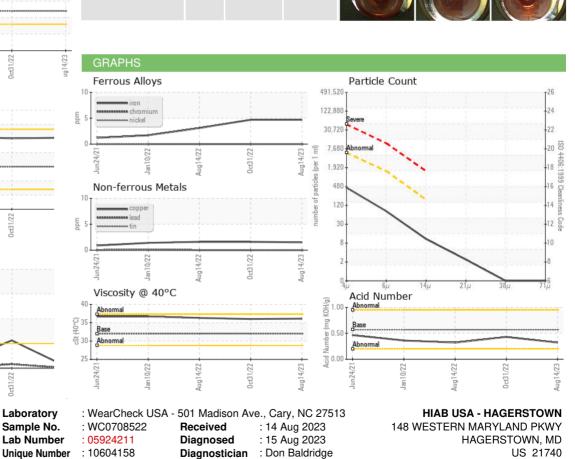

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Test Package : MOB 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Certificate L2367

T: (240)625-0045

F: (301)797-7284

Contact: CHUCK WISHARD

CHUCK.WISHARD@HIAB.COM