




OIL ANALYSIS REPORT

Sample Rating Trend

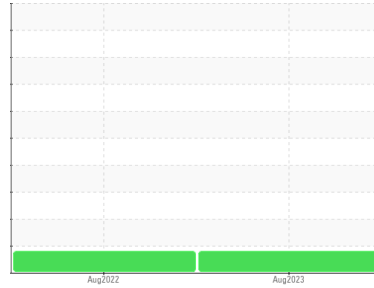

VISCOSITY



Machine Id
TK25686

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

▲ Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0698787	WC0679390	---
Sample Date	Client Info	14 Aug 2023	14 Aug 2022	---
Machine Age	hrs Client Info	0	0	---
Oil Age	hrs Client Info	0	0	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ATTENTION	ATTENTION	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	1	<1	---
Chromium ppm ASTM D5185m	>10	<1	0	---
Nickel ppm ASTM D5185m	>10	0	0	---
Titanium ppm ASTM D5185m		0	0	---
Silver ppm ASTM D5185m		0	0	---
Aluminum ppm ASTM D5185m	>10	0	0	---
Lead ppm ASTM D5185m	>10	0	0	---
Copper ppm ASTM D5185m	>75	0	<1	---
Tin ppm ASTM D5185m	>10	0	0	---
Vanadium ppm ASTM D5185m		0	0	---
Cadmium ppm ASTM D5185m		0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	5	0	<1	---
Barium ppm ASTM D5185m	5	0	0	---
Molybdenum ppm ASTM D5185m	5	0	<1	---
Manganese ppm ASTM D5185m		<1	0	---
Magnesium ppm ASTM D5185m	25	<1	0	---
Calcium ppm ASTM D5185m	200	44	48	---
Phosphorus ppm ASTM D5185m	300	319	320	---
Zinc ppm ASTM D5185m	370	402	412	---
Sulfur ppm ASTM D5185m	2500	5246	4536	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>20	<1	<1	---
Sodium ppm ASTM D5185m		0	<1	---
Potassium ppm ASTM D5185m	>20	<1	0	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	4300	3730	---
Particles >6µm ASTM D7647	>1300	526	475	---
Particles >14µm ASTM D7647	>160	53	78	---
Particles >21µm ASTM D7647	>40	19	36	---
Particles >38µm ASTM D7647	>10	1	3	---
Particles >71µm ASTM D7647	>3	0	0	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	19/16/13	19/16/13	---


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.57	0.37	0.47	---




OIL ANALYSIS REPORT


▲ Viscosity @ 100°C

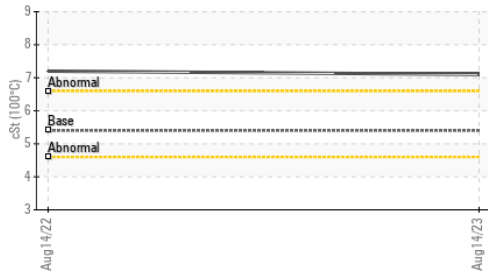


● Particle Trend

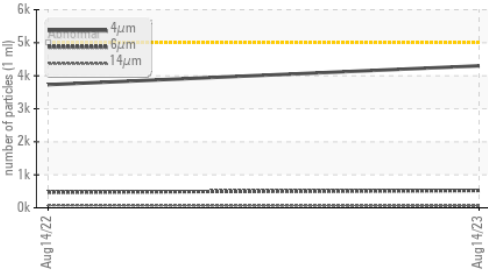


● Particle Count

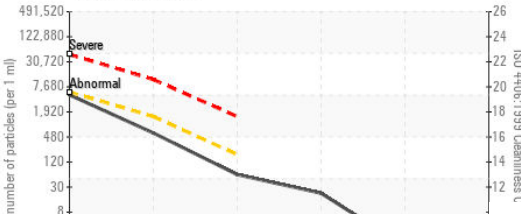

● Acid Number

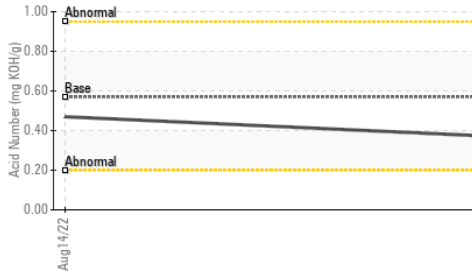


● Particle Trend

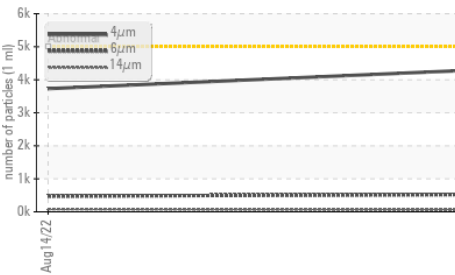

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	▲ 41.3	▲ 41.7
Visc @ 100°C	cSt	ASTM D445	5.4	▲ 7.1	▲ 7.2
Viscosity Index (VI)	Scale	ASTM D2270	102	133	135

● SAMPLE IMAGES

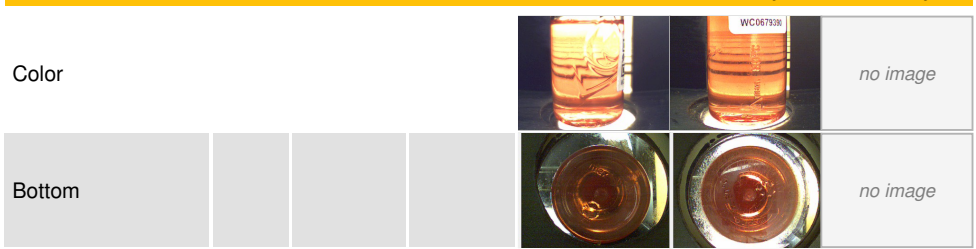


● GRAPHS


● Ferrous Alloys

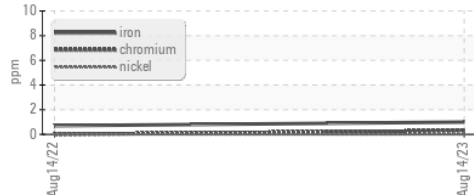


● Non-ferrous Metals

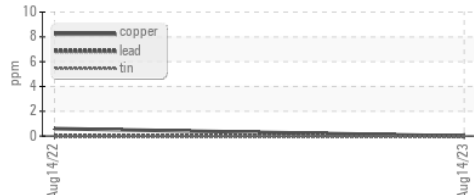

▲ Viscosity @ 40°C

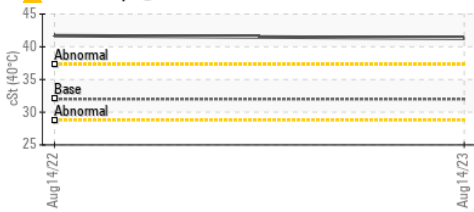

● Particle Count

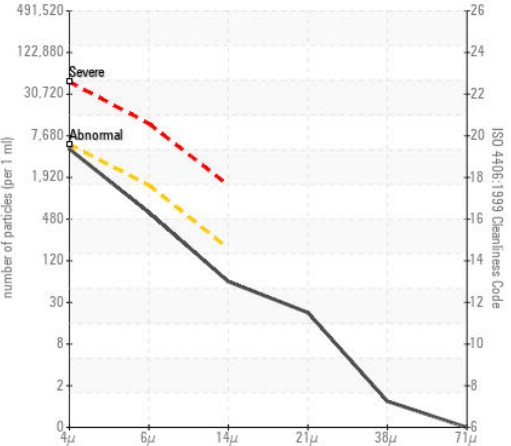

● Acid Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0698787 Received : 14 Aug 2023
 Lab Number : 05924219 Diagnosed : 15 Aug 2023
 Unique Number : 10604166 Diagnostician : Don Baldrige
 Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - HAGERSTOWN
 148 WESTERN MARYLAND PKWY
 HAGERSTOWN, MD
 US 21740
 Contact: CHUCK WISHARD
 CHUCK.WISHARD@HIAB.COM
 T: (240)625-0045
 F: (301)797-7284

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)