




OIL ANALYSIS REPORT

Sample Rating Trend

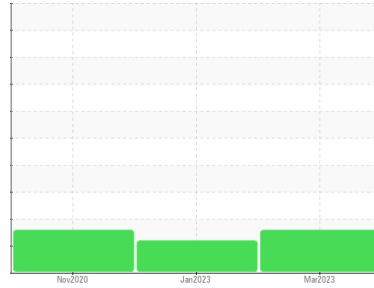

ISO



Machine Id

538

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0741541	WC0735135	WC0517682
Sample Date	Client Info		24 Mar 2023	25 Jan 2023	06 Nov 2020
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	N/A	Not Chngd
Sample Status			ABNORMAL	ATTENTION	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	12	13	13
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	0	0
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >75	<1	1	2
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	0	1
Barium	ppm	ASTM D5185m 5	0	1	0
Molybdenum	ppm	ASTM D5185m 5	0	<1	<1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 25	6	6	2
Calcium	ppm	ASTM D5185m 200	128	130	167
Phosphorus	ppm	ASTM D5185m 300	363	353	404
Zinc	ppm	ASTM D5185m 370	290	297	342
Sulfur	ppm	ASTM D5185m 2500	3130	2774	2962

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<1	<1	0
Sodium	ppm	ASTM D5185m	<1	0	0
Potassium	ppm	ASTM D5185m >20	<1	<1	<1

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 9019	▲ 6262	▲ 10930
Particles >6µm	ASTM D7647	>1300	▲ 1770	▲ 2117	▲ 2499
Particles >14µm	ASTM D7647	>160	109	106	▲ 216
Particles >21µm	ASTM D7647	>40	24	16	▲ 62
Particles >38µm	ASTM D7647	>10	1	1	4
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 20/18/14	▲ 20/18/14	▲ 21/18/15

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.32	0.39	0.338




OIL ANALYSIS REPORT

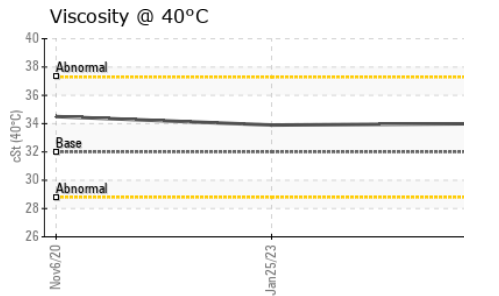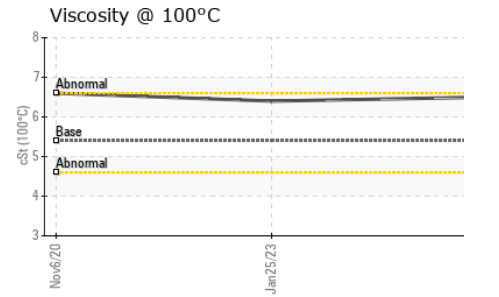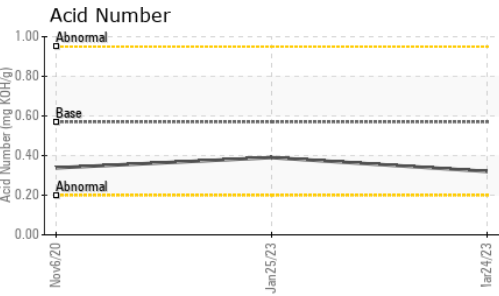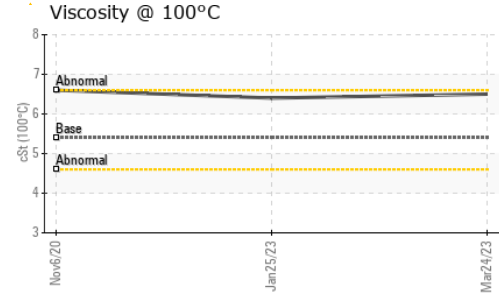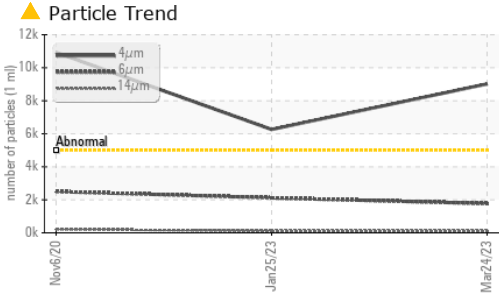





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	33.9	34.5
Visc @ 100°C	cSt	ASTM D445	5.4	6.5	6.6
Viscosity Index (VI)	Scale	ASTM D2270	102	147	143

SAMPLE IMAGES

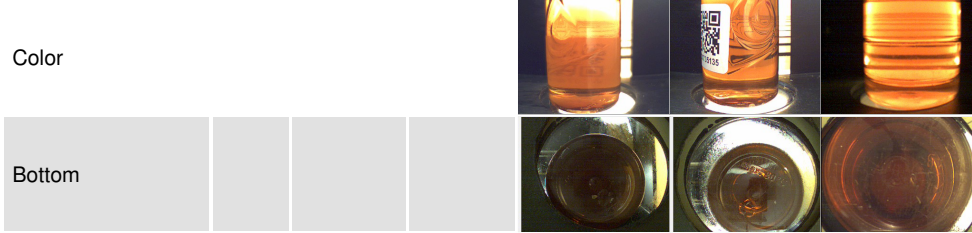

GRAPHS

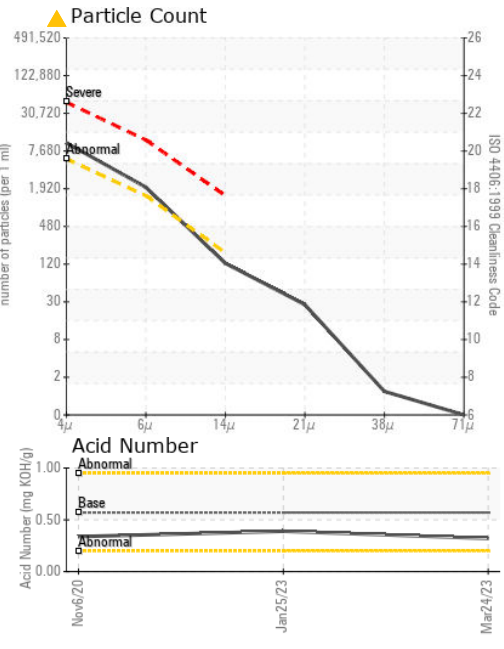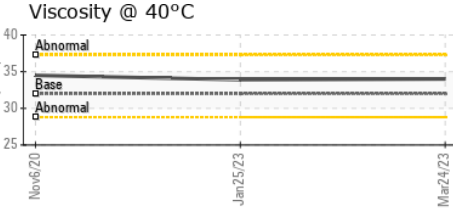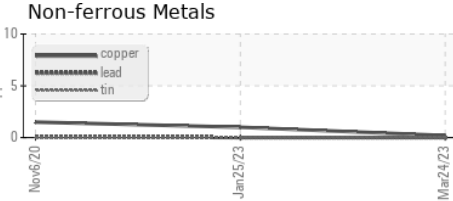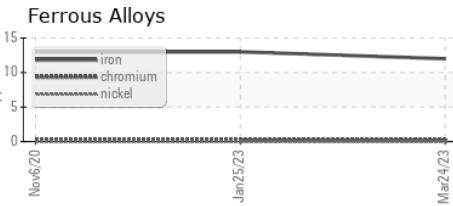

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0741541 **Received** : 14 Aug 2023
Lab Number : 05924233 **Diagnosed** : 15 Aug 2023
Unique Number : 10604180 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - HAGERSTOWN
 148 WESTERN MARYLAND PKWY
 HAGERSTOWN, MD
 US 21740
 Contact: CHUCK WISHARD
 CHUCK.WISHARD@HIAB.COM
 T: (240)625-0045
 F: (301)797-7284

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)