


# PROBLEM SUMMARY

Sample Rating Trend



**WEAR**

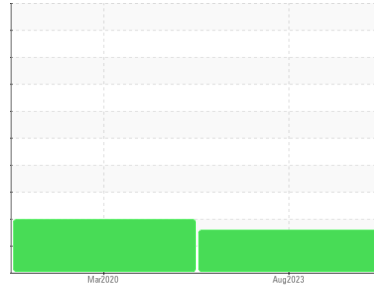


Machine Id  
**KAESER 5259677**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Non-ferrous Metals

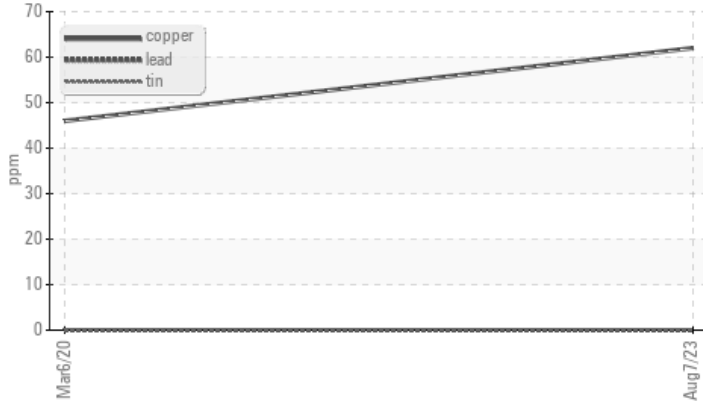

### ▲ Viscosity @ 40°C



## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	---
Copper	ppm	ASTM D5185m	>50	▲ <b>62</b>	46	---
Debris	scalar	*Visual	NONE	▲ <b>MODER</b>	NONE	---
Visc @ 40°C	cSt	ASTM D445	45	▲ <b>54.6</b>	43.8	---

Customer Id: BLEPIK  
Sample No.: KC05924283  
Lab Number: 05924283  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

## HISTORICAL DIAGNOSIS

06 Mar 2020 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

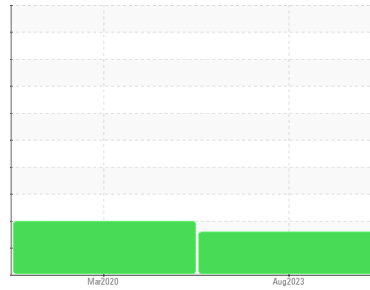

**WEAR**



Machine Id  
**KAESER 5259677**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### ▲ Wear

The copper level is abnormal. All other component wear rates are normal.

### ▲ Contamination

Moderate concentration of visible dirt/debris present in the oil.

### ▲ Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC05924283</b>	KCP24027	---
Sample Date	Client Info			<b>07 Aug 2023</b>	06 Mar 2020	---
Machine Age	hrs	Client Info		<b>13680</b>	2301	---
Oil Age	hrs	Client Info		<b>0</b>	2301	---
Oil Changed	Client Info			<b>N/A</b>	Changed	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	2	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>▲ 62</b>	46	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Antimony	ppm	ASTM D5185m		<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m	90	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	100	<b>&lt;1</b>	5	---
Calcium	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Phosphorus	ppm	ASTM D5185m	0	<b>6</b>	0	---
Zinc	ppm	ASTM D5185m	0	<b>0</b>	4	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>2</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Water	%	ASTM D6304	>0.05	<b>0.003</b>	0.007	---
ppm Water	ppm	ASTM D6304	>500	<b>34.9</b>	70.3	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>---</b>	29421	---
Particles >6µm		ASTM D7647	>1300	<b>---</b>	<b>▲ 10619</b>	---
Particles >14µm		ASTM D7647	>80	<b>---</b>	<b>▲ 719</b>	---
Particles >21µm		ASTM D7647	>20	<b>---</b>	<b>▲ 154</b>	---
Particles >38µm		ASTM D7647	>4	<b>---</b>	<b>▲ 8</b>	---
Particles >71µm		ASTM D7647	>3	<b>---</b>	<b>▲ 3</b>	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>---</b>	<b>▲ 21/17</b>	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.23</b>	0.210	---


# OIL ANALYSIS REPORT

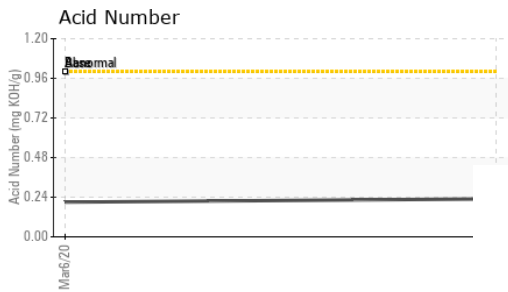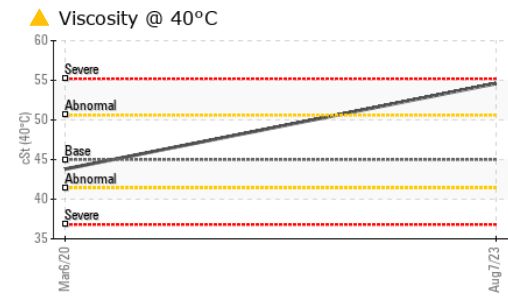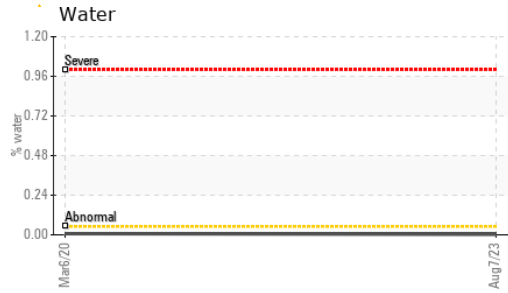






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	45	▲ 54.6	43.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

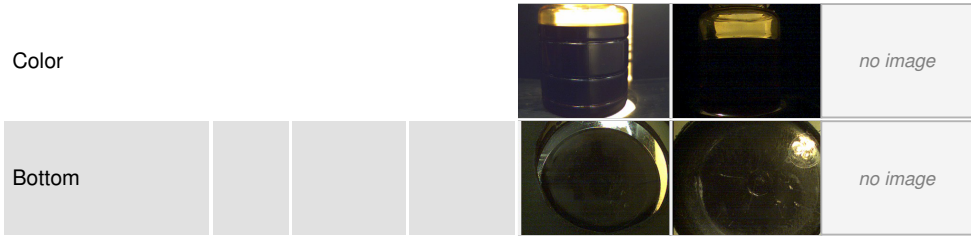

## GRAPHS

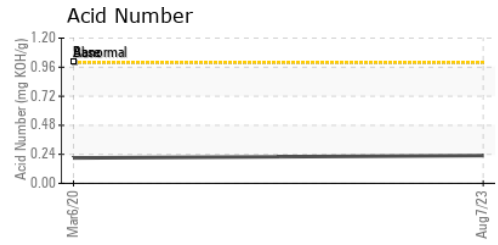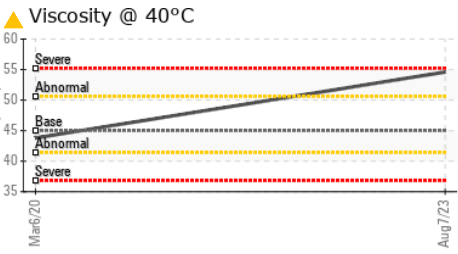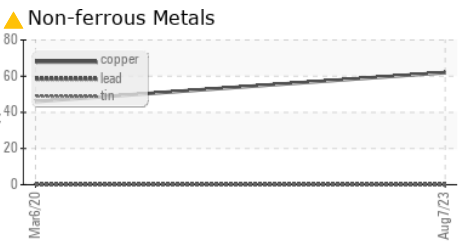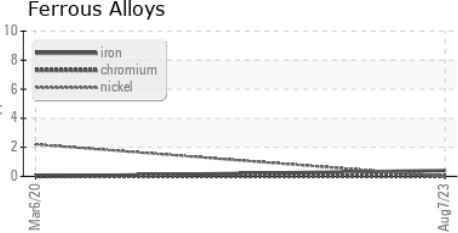

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC05924283  
**Lab Number** : 05924283  
**Unique Number** : 10604230  
**Test Package** : IND 2

**BLEDSOE COUNTY BOARD OF EDUCATION**  
 478 SPRING ST  
 PIKEVILLE, TN  
 US 37367  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: