

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
Debris	scalar	*Visual	NONE	A MODER	LIGHT	A MODER

Customer Id: AXIJEF Sample No.: KCPA004007 Lab Number: 05924301 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDE	ED ACTIONS			
Action	Status	Date	Done By	I
Alert			?	1

Description

We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS



16 Dec 2022 Diag: Don Baldridge

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

05 Feb 2022 Diag: Jonathan Hester



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

19 Jul 2021 Diag: Doug Bogart

Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

Machine Id KAESER CSD 125 6124344 (S/N 3144) Component

Compressor Fluic

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear


All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

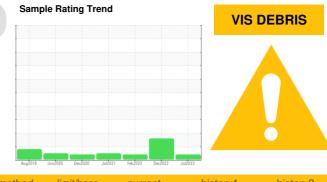

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004007	KC106912	KC95930
Sample Date		Client Info		25 Jul 2023	16 Dec 2022	05 Feb 2022
Machine Age	hrs	Client Info		15031	13242	11517
Oil Age	hrs	Client Info		0	600	800
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m			0	0
	ppm		>3	0		
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	12	2	8
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	90	0	55	54
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		4	4	0
Zinc	ppm	ASTM D5185m		0	10	12
Sulfur	ppm	ASTM D5185m		19228	21258	14692
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m		<1	<1	<1
	ppm		>20			
Sodium	ppm	ASTM D5185m	>20	0	20	16 4
Potassium	ppm	ASTM D5185m		•		
	0/			0	2	
Water	%	ASTM D6304	>0.05	0.005	0.022	0.011
Water ppm Water	ppm	ASTM D6304 ASTM D6304	>0.05 >500		0.022 222.0	0.011 112.9
Water ppm Water FLUID CLEANLIN	ppm	ASTM D6304 ASTM D6304 method	>0.05	0.005	0.022 222.0 history1	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm	ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	0.005 59.8 current	0.022 222.0 history1 5644	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300	0.005 59.8 current	0.022 222.0 history1 5644 ▲ 1473	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0.005 59.8 	0.022 222.0 history1 5644 ▲ 1473 ▲ 109	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20	0.005 59.8 current 	0.022 222.0 history1 5644 ▲ 1473 ▲ 109 ▲ 24	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >28µm	ppm	ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0.005 59.8 	0.022 222.0 history1 5644 ▲ 1473 ▲ 109 ▲ 24 2	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	0.005 59.8 	0.022 222.0 history1 5644 ▲ 1473 ▲ 109 ▲ 24 2 0	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm	ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0.005 59.8 current 	0.022 222.0 history1 5644 ▲ 1473 ▲ 109 ▲ 24 2	0.011 112.9 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ESS	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	0.005 59.8 current 	0.022 222.0 history1 5644 ▲ 1473 ▲ 109 ▲ 24 2 0	0.011 112.9 history2

Contact/Location: L LEWIS - AXIJEF



42


38 Aug21/18 -

Ał 40

Jun11/20

Dec21/20


OIL ANALYSIS REPORT

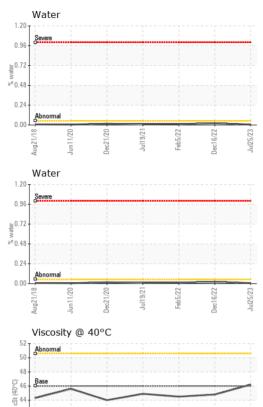

Feb5/22

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	🔺 MODER	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	46.2	44.8	44.5
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

Color



Bottom

