


## **PROBLEM SUMMARY**


# KAESER SFC 90 1222216 (S/N 1003)

Compressor

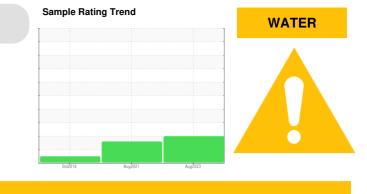

## KAESER SIGMA (OEM) M-460 (--- QTS)

## COMPONENT CONDITION SUMMARY

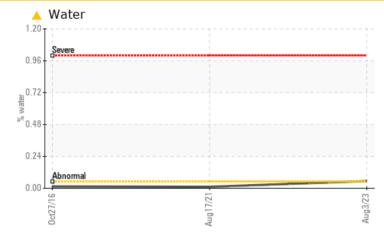

### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	ABNORMAL	NORMAL	
Water	%	ASTM D6304	>0.05	<b>6</b> 0.054	0.011	0.014	
ppm Water	ppm	ASTM D6304	>500	<b>6</b> 547.0	118.1	140	
Debris	scalar	*Visual	NONE	🔺 MODER	LIGHT	VLITE	

Customer Id: CALSAL Sample No.: KCPA005936 Lab Number: 05924310 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMEND	ED ACTIONS			
Action	Status	Date	Done By	De
Alert			?	We

### escription

Ve were unable to perform a particle count due to a high concentration of articles present in this sample.

## **HISTORICAL DIAGNOSIS**



17 Aug 2021 Diag: Angela Borella

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report


#### 27 Oct 2016 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.









## **OIL ANALYSIS REPORT**

## KAESER SFC 90 1222216 (S/N 1003)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- QTS)

## DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## Wear


All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a trace of moisture present in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

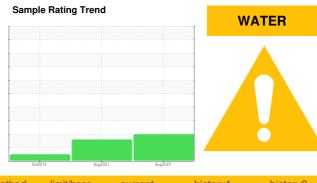


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005936	KCP41603	KCP58882
Sample Date		Client Info		03 Aug 2023	17 Aug 2021	27 Oct 2016
Machine Age	hrs	Client Info		66070	58968	45956
Oil Age	hrs	Client Info		0	4000	2410
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
		ASTM D5185m		6	3	3
Copper Tin	ppm	ASTM D5185m		0	0	0
	ppm		>10		0	0
Antimony Vanadium	ppm	ASTM D5185m ASTM D5185m		0	0	0
	ppm					
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	25	0
Barium	ppm	ASTM D5185m	90	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	41	9	15
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	6	<1	58
Zinc	ppm	ASTM D5185m	0	6	21	42
Sulfur	ppm	ASTM D5185m	23500	20990	16580	20427
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		9	2	5
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.05	<b>A</b> 0.054	0.011	0.014
ppm Water	ppm	ASTM D6304	>500	<b>6</b> 547.0	118.1	140
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			15198	397
Particles >6µm		ASTM D7647	>1300		▲ 4869	216
Particles >14µm		ASTM D7647	>80		<b>4</b> 77	36
Particles >21µm		ASTM D7647	>20		<b>1</b> 57	12
Particles >38µm		ASTM D7647	>4		<b>1</b> 0	1
Particles >71µm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13		▲ 19/16	15/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.40	0.446	0.420
:24:53) Bev: 1		. 10 111 000-10		0.10	Contact/Locatio	


Report Id: CALSAL [WUSCAR] 05924310 (Generated: 08/16/2023 09:24:53) Rev: 1


Contact/Location: ? ? - CALSAL




## **OIL ANALYSIS REPORT**

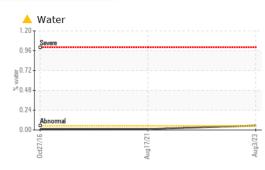

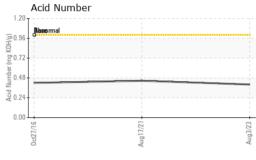



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	🔺 MODER	LIGHT	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.8	47.2	45.2
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						



Bottom

