




# OIL ANALYSIS REPORT

Sample Rating Trend

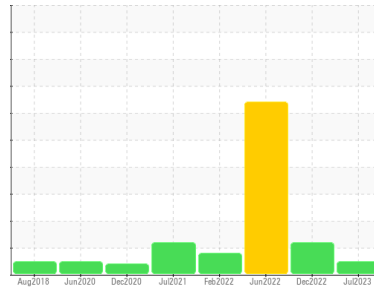

**NORMAL**



Machine Id  
**KAESER CSD 125 6113804 (S/N 3119)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC110221</b>	KC106931	KC103988
Sample Date	Client Info			<b>26 Jul 2023</b>	16 Dec 2022	02 Jun 2022
Machine Age	hrs	Client Info		<b>15225</b>	11839	11694
Oil Age	hrs	Client Info		<b>4000</b>	200	3000
Oil Changed	Client Info			<b>Changed</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	SEVERE

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	2
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>6</b>	<1	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	90	<b>0</b>	14	6
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	90	<b>6</b>	85	22
Calcium	ppm	ASTM D5185m	2	<b>0</b>	2	0
Phosphorus	ppm	ASTM D5185m		<b>6</b>	4	2
Zinc	ppm	ASTM D5185m		<b>0</b>	9	8

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	15	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	0
Water	%	ASTM D6304	>0.05	<b>0.006</b>	0.022	▲ 0.425
ppm Water	ppm	ASTM D6304	>500	<b>63.7</b>	226.9	▲ 4250

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>334</b>	17400	---
Particles >6µm		ASTM D7647	>1300	<b>88</b>	▲ 3846	---
Particles >14µm		ASTM D7647	>80	<b>10</b>	▲ 121	---
Particles >21µm		ASTM D7647	>20	<b>3</b>	16	---
Particles >38µm		ASTM D7647	>4	<b>0</b>	1	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>16/14/10</b>	▲ 21/19/14	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.47</b>	0.35	0.38


# OIL ANALYSIS REPORT

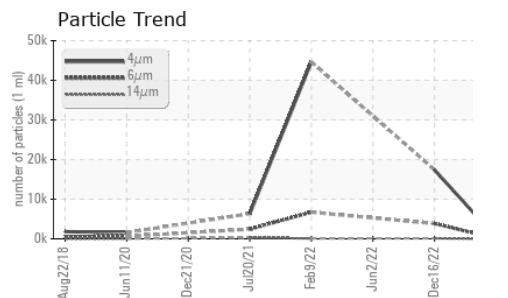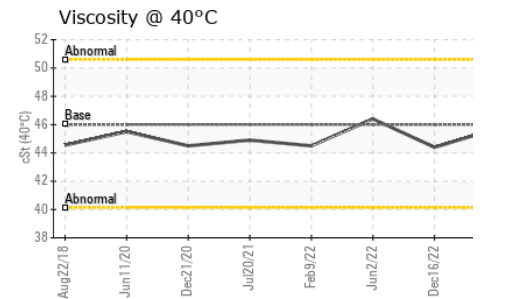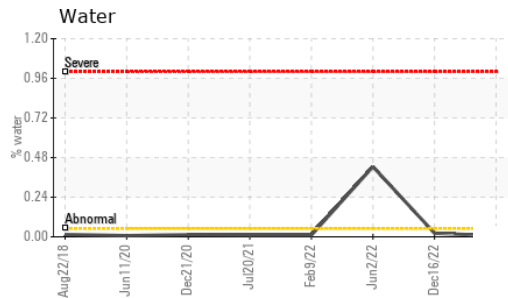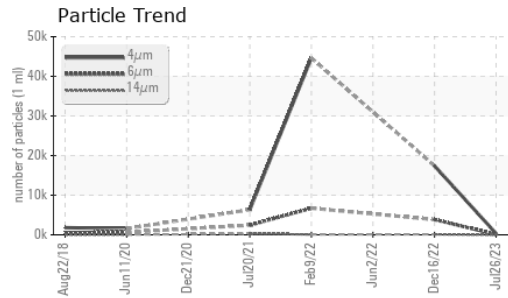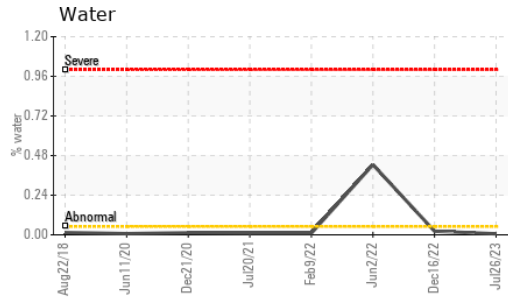





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.7	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

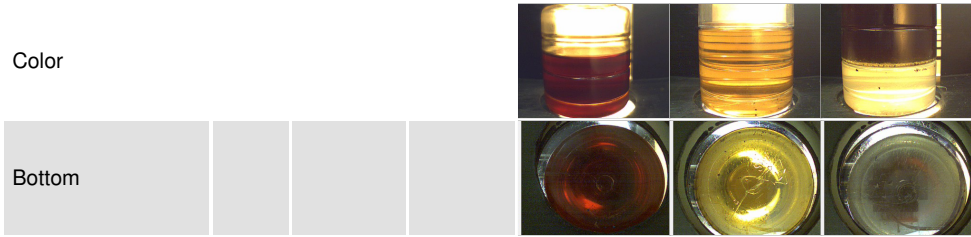

## GRAPHS

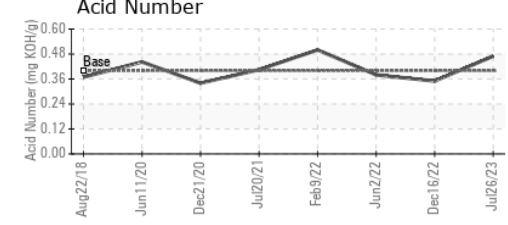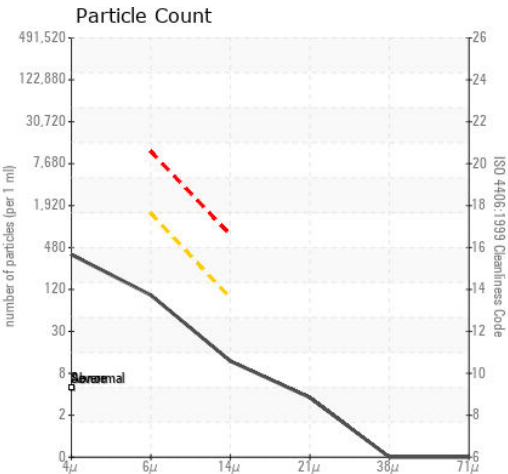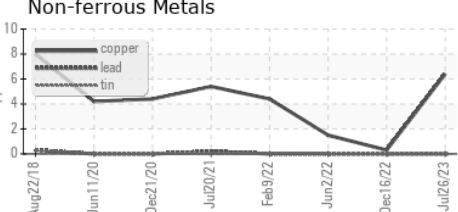

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC110221 **Received** : 14 Aug 2023  
**Lab Number** : 05924347 **Diagnosed** : 16 Aug 2023  
**Unique Number** : 10604294 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**AXIUM PLASTICS**  
 355 N SHAMROCK RD  
 JEFFERSON CITY, MO  
 US 65101  
 Contact: L LEWIS  
 LLEWIS@AXIUMPLASTICS.COM  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)