


PROBLEM SUMMARY

CARRIER LCOR MADISON WEST C1 (S/N 5002Q6731)

Refrigeration Compressor Fluid POE 68 (--- Oz)

COMPONENT CONDITION SUMMARY

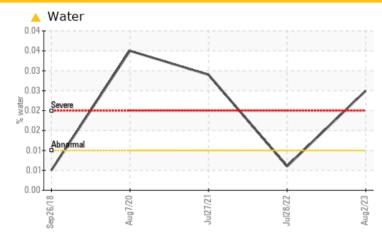

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | |
|--------------------------|-----|------------|-------|----------------|----------|----------------|--|--|
| Sample Status | | | | MARGINAL | ABNORMAL | ABNORMAL | | |
| Water | % | ASTM D6304 | >0.01 | A 0.025 | 0.006 | ▲ 0.029 | | |
| ppm Water | ppm | ASTM D6304 | >100 | A 252.6 | 68.9 | A 293.3 | | |


Customer Id: CDSCRO Sample No.: WC0714048 Lab Number: 05924362 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

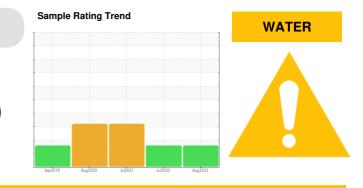

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

28 Jul 2022 Diag: Don Baldridge



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. Elemental level of silicon (Si) above normal. The AN level is acceptable for this fluid. The



27 Jul 2021 Diag: Don Baldridge

07 Aug 2020 Diag: Don Baldridge

WATER



in our zozir blag. Bon Balanage

condition of the oil is suitable for further service.

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a trace of moisture present in the oil. Elemental level of silicon (Si) above normal. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a trace of moisture present in the oil. Elemental level of silicon (Si) above normal. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

CARRIER LCOR MADISON WEST C1 (S/N 5002Q6731)

Refrigeration Compressor Fluid POE 68 (--- Oz)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a trace of moisture present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

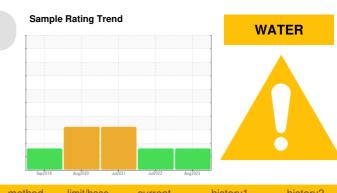



| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|------------------|----------|-------------|------------|----------------|-------------|-------------|
| Sample Number | | Client Info | | WC0714048 | WC0597016 | WC0484521 |
| Sample Date | | Client Info | | 02 Aug 2023 | 28 Jul 2022 | 27 Jul 2021 |
| Machine Age | hrs | Client Info | | 73133 | 68615 | 65834 |
| Oil Age | hrs | Client Info | | 73133 | 68615 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | MARGINAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | 0 | <1 | 0 |
| Chromium | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 1 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >3 | <1 | 2 | <1 |
| Lead | ppm | ASTM D5185m | >2 | 0 | <1 | 2 |
| Copper | ppm | ASTM D5185m | >8 | 0 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >4 | 2 | 3 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 2 | <1 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 5 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 1156 | 1762 | 912 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 3 | 59 | 0 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | 14 | <u> </u> | ^ 27 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Water | % | ASTM D6304 | >0.01 | <u> </u> | 0.006 | ▲ 0.029 |
| ppm Water | ppm | ASTM D6304 | >100 | 4 252.6 | 68.9 | ▲ 293.3 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D974 | | 0.068 | 0.074 | 0.073 |



OIL ANALYSIS REPORT

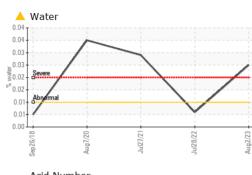


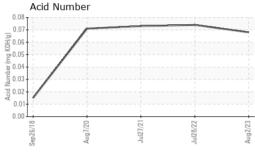

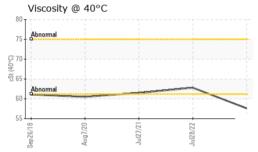

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|------------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.01 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | | 57.6 | 62.8 | 61.5 |
| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
| Color | | | | | chille(A) | żł |

Bottom

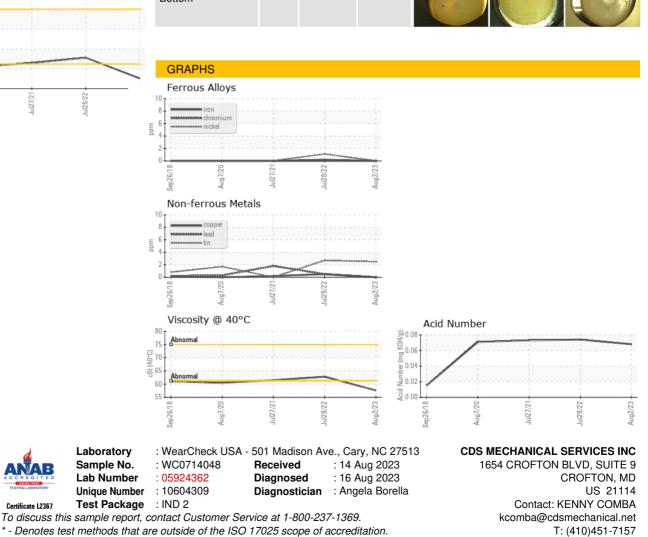

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Laboratory

Sample No.

Lab Number

Unique Number

Page 4 of 4

F: