

# **PROBLEM SUMMARY**


#### Sample Rating Trend




# CARRIER LCOR REMSEN C2 (S/N 3802Q67308)

**Refrigeration Compressor** 

**CARRIER 68 (--- Oz)** 



#### **COMPONENT CONDITION SUMMARY**

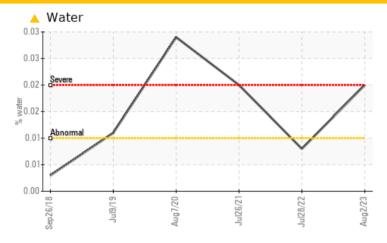

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status				MARGINAL	NORMAL	MARGINAL	
Water	%	ASTM D6304	>0.01	<b>△</b> 0.020	0.008	△ 0.02	
ppm Water	ppm	ASTM D6304	>100	<b>205.4</b>	89.3	<b>200.0</b>	

Customer Id: CDSCRO **Sample No.:** WC0713935 Lab Number: 05924363 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 28 Jul 2022 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 26 Jul 2021 Diag: Don Baldridge

WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a trace of moisture present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 07 Aug 2020 Diag: Don Baldridge

WATER



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a trace of moisture present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**


#### Sample Rating Trend

## **WATER**

# CARRIER LCOR REMSEN C2 (S/N 3802Q67308)

**Refrigeration Compressor** 

**CARRIER 68 (--- Oz)** 





### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

#### Contamination

There is a trace of moisture present in the oil.


#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0713935	WC0714109	WC0596988
Sample Date		Client Info		02 Aug 2023	28 Jul 2022	26 Jul 2021
Machine Age	hrs	Client Info		2770	2366	1677
Oil Age	hrs	Client Info		2770	2366	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				MARGINAL	NORMAL	MARGINAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	0
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>3	<1	2	<1
Lead	ppm	ASTM D5185m	>2	0	<1	3
Copper	ppm	ASTM D5185m	>8	2	2	<1
Tin	ppm	ASTM D5185m	>4	7	9	0
Antimony	ppm	ASTM D5185m				<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	2
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		1	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		525	522	263
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		5	87	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	7	8	14
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.01	<b>△</b> 0.020	0.008	▲ 0.02
ppm Water	ppm	ASTM D6304	>100	<b>205.4</b>	89.3	▲ 200.0
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.029	0.049	0.015



# **OIL ANALYSIS REPORT**

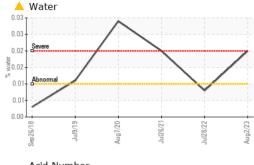

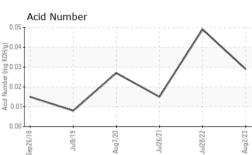

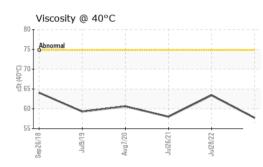

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPE	NIIE3	memod	iiiiii/base	current	riistory i	HIStory
Visc @ 40°C	cSt	ASTM D445		57.7	63.4	58.0

AMPLE IMAGES	method	limit/
--------------	--------	--------

/base

current

history1

history2

Color

SA


**Bottom** 










#### **GRAPHS**







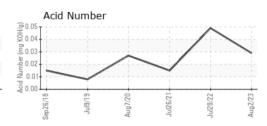





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0713935 : 05924363

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: 10604310

Received : 14 Aug 2023 : 16 Aug 2023 Diagnosed Diagnostician : Angela Borella

**CDS MECHANICAL SERVICES INC** 1654 CROFTON BLVD, SUITE 9

CROFTON, MD US 21114 Contact: KENNY COMBA

kcomba@cdsmechanical.net T: (410)451-7157

Submitted By: JOSE GARCIA

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)