




# OIL ANALYSIS REPORT

Sample Rating Trend

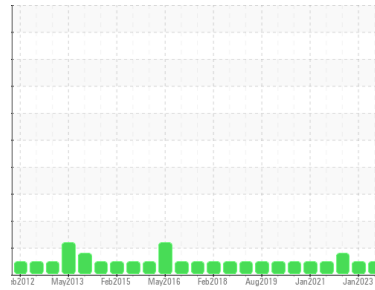

**NORMAL**



Area  
**[BOSTON]**  
 Machine Id  
**ALSTOM R005**

Component  
**Gearbox**  
 Fluid  
**TOTAL CARTER SH 220 (3 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0781700</b>	WC0673252	WC0673326
Sample Date	Client Info			<b>28 Jul 2023</b>	28 Jan 2023	31 Jul 2022
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>175</b>	149	▲ 218
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	4
Lead	ppm	ASTM D5185m	>50	<b>6</b>	5	3
Copper	ppm	ASTM D5185m	>200	<b>66</b>	68	22
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	3
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>2</b>	2	3
Magnesium	ppm	ASTM D5185m		<b>1</b>	1	0
Calcium	ppm	ASTM D5185m		<b>1</b>	4	3
Phosphorus	ppm	ASTM D5185m		<b>372</b>	335	299
Zinc	ppm	ASTM D5185m		<b>143</b>	129	87
Sulfur	ppm	ASTM D5185m		<b>3385</b>	2807	2837



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>17</b>	13	13
Sodium	ppm	ASTM D5185m		<b>20</b>	22	16
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	<1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.47</b>	0.54	0.37

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT







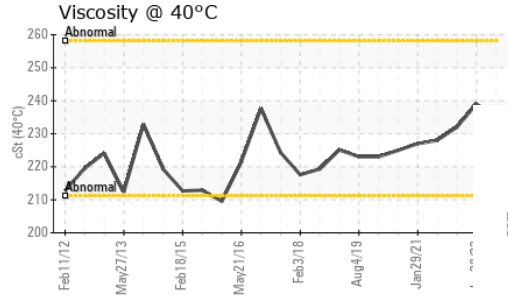
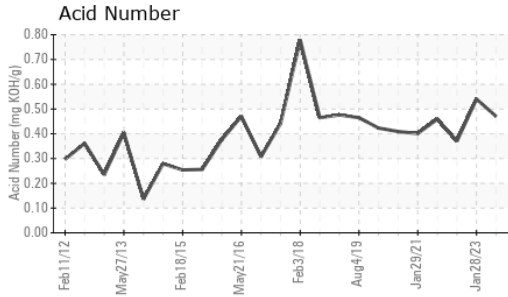


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		235	239	232

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------



## GRAPHS

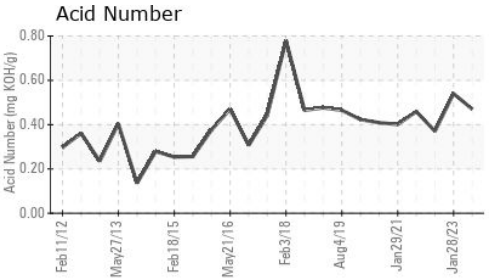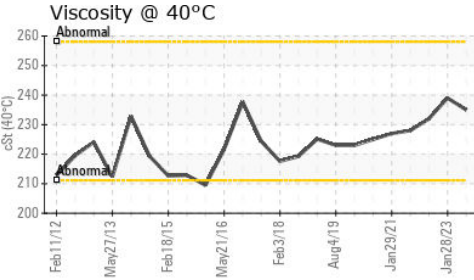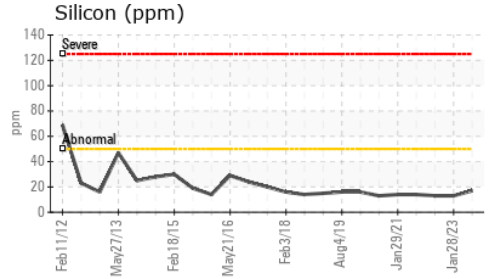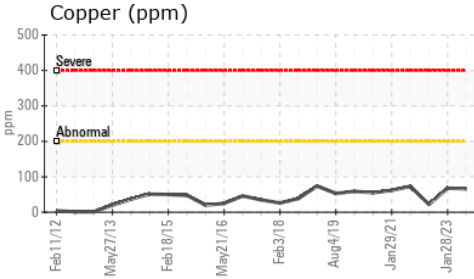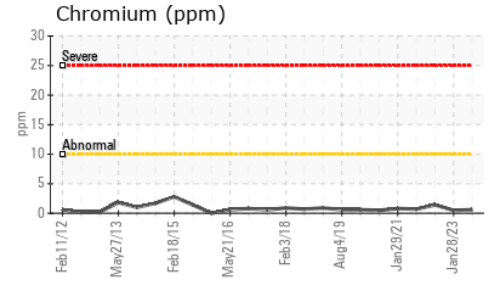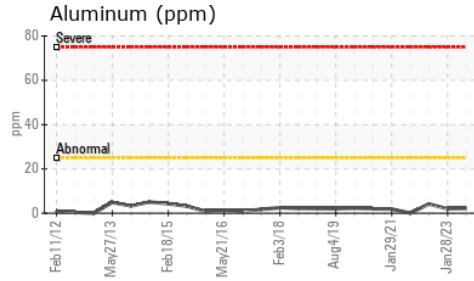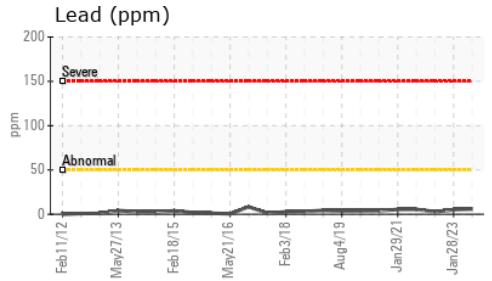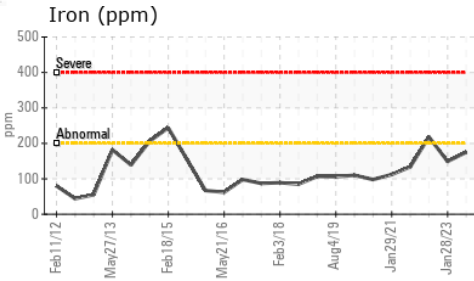

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0781700 **Received** : 14 Aug 2023  
**Lab Number** : 05924442 **Diagnosed** : 15 Aug 2023  
**Unique Number** : 10604389 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**AMTRAK**  
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR  
 WASHINGTON, DC  
 US 20018  
 Contact: MICHAEL PORTER  
 michael.porter@amtrak.com  
 T: (202)870-1399  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)