



# **PROBLEM SUMMARY**

### Area FRONTIER II Machine Id 33WEA86925 Component

Grease Fluid NOT GIVEN (--- LTR)

# COMPONENT CONDITION SUMMARY

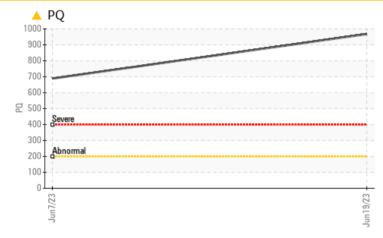

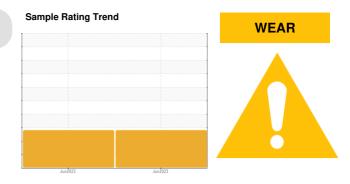

# Ferrous Alloys

### RECOMMENDATION

Re-sample to verify the actual oil condition. Purge old grease if still abnormal and monitor the trend of iron level.

# PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	
PQ		ASTM D8184	>200	<u> </u>	<u> </u>	
Iron	ppm	ASTM D5185m	>250	<b>287</b>	<b>3</b> 64	

Customer Id: NORDEX Sample No.: NX05924616 Lab Number: 05924616 Test Package: GRS 1



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Monitor			?	Re-sample to verify the actual oil condition. Purge old grease if still abnormal and monitor the trend of iron level.		
Change Fluid			?	Re-sample to verify the actual oil condition. Purge old grease if still abnormal and monitor the trend of iron level.		
Resample			?	Re-sample to verify the actual oil condition. Purge old grease if still abnormal and monitor the trend of iron level.		

## HISTORICAL DIAGNOSIS



07 Jun 2023 Diag: Doug Bogart

Re-sample to verify the actual oil condition. Purge old grease if still abnormal and monitor the trend of iron level.Bearing and/or bushing wear is indicated. There is no indication of any contamination in the grease. The condition of the grease is acceptable for the time in service.





# **GREASE ANALYSIS**

Sample Rating Trend

### Area **FRONTIER II** Machine Id **33WEA86925** Component

Grease Fluid NOT GIVEN (--- LTR)

### DIAGNOSIS

### Recommendation

Re-sample to verify the actual oil condition. Purge old grease if still abnormal and monitor the trend of iron level.

# 🔺 Wear

Bearing and/or bushing wear is indicated.

### **Grease Condition**

The condition of the grease is acceptable for the time in service.


### Contaminants


There is no indication of any contamination in the grease.

			Jun2023	Jun2023		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX05924616	NX05884823	
Sample Date		Client Info		19 Jun 2023	07 Jun 2023	
Machine Age	hrs	Client Info		0	0	
Grease Age	hrs	Client Info		0	0	
Grease Serviced		Client Info		N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>200	<u> </u>	<b>6</b> 89	
Iron	ppm	ASTM D5185m	>250	<u> </u>	▲ 364	
Chromium	ppm	ASTM D5185m	>10	2	3	
Nickel	ppm	ASTM D5185m	>5	0	0	
Cadmium	ppm	ASTM D5185m		<1	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Vanadium	ppm	ASTM D5185m		1	1	
Lead	ppm	ASTM D5185m	>25	<1	<1	
Copper	ppm	ASTM D5185m	>75	39	33	
Tin	ppm	ASTM D5185m	>5	0	0	
Silver	ppm	ASTM D5185m	>5	<1	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		158	160	
Magnesium	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		3	4	
Molybdenum	ppm	ASTM D5185m		3361	4068	
Phosphorus	ppm	ASTM D5185m		807	736	
Zinc	ppm	ASTM D5185m		125	130	
THICKENER/SOA	P	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		10	10	
Calcium	ppm	ASTM D5185m		19	20	
Sodium	ppm	ASTM D5185m		12	9	
Lithium	ppm	ASTM D5185m		3044	3382	
Sulfur	ppm	ASTM D5185m		4607	4802	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>150	59	70	
Potassium	ppm	ASTM D5185m		2	<1	



# **GREASE ANALYSIS**

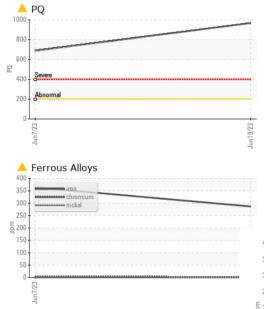

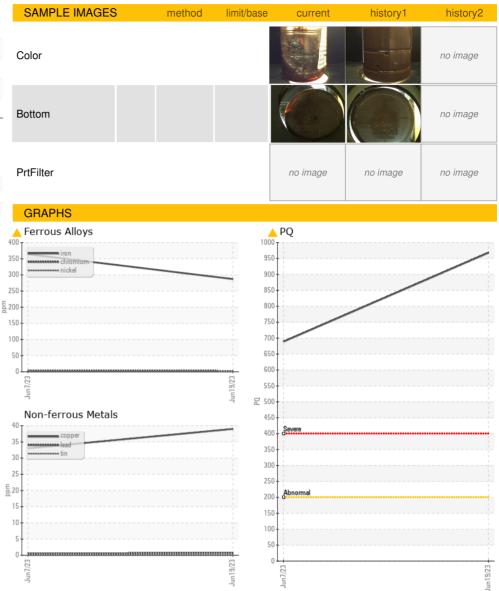



Contact/Location: DEVIN LINEHAN - NORDEX