


PROBLEM SUMMARY

KAESER ASD25 2534064 (S/N 1048)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

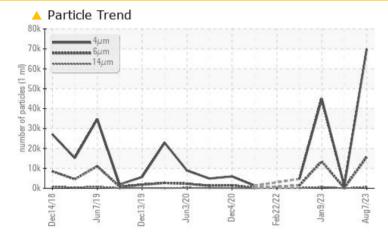

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | | | |
|--------------------------|--------------|---------|-------------------|----------|-------------------|--|--|--|--|--|
| Sample Status | | | ABNORMAL | NORMAL | ABNORMAL | | | | | |
| Particles >6µm | ASTM D7647 | >1300 | <u> </u> | 198 | 1 3467 | | | | | |
| Particles >14µm | ASTM D7647 | >80 | 655 | 7 | ▲ 654 | | | | | |
| Particles >21µm | ASTM D7647 | >20 | <u> </u> | 2 | 1 31 | | | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | A 23/21/17 | 18/15/10 | A 23/21/17 | | | | | |


Customer Id: WESNEWPA Sample No.: KC108578 Lab Number: 05924856 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

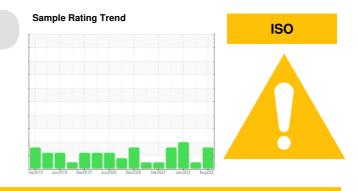

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

10 Apr 2023 Diag: Don Baldridge



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

09 Jan 2023 Diag: Jonathan Hester



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



30 Sep 2022 Diag: Jonathan Hester

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

KAESER ASD25 2534064 (S/N 1048)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

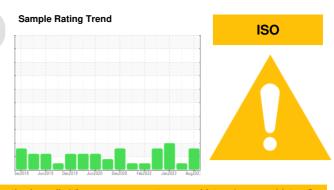

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|--------------|------------|-------------------|-------------|-------------|
| Sample Number | | Client Info | | KC108578 | KC101778 | KC91309 |
| Sample Date | | Client Info | | 07 Aug 2023 | 10 Apr 2023 | 09 Jan 2023 |
| Machine Age | hrs | Client Info | | 131271 | 128418 | 126238 |
| Oil Age | hrs | Client Info | | 3000 | 5000 | 3000 |
| Oil Changed | | Client Info | | Not Changd | Changed | Not Changd |
| Sample Status | | | | ABNORMAL | NORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 5 | 12 | 6 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 210 | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ррпі | | | - | - | - |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | 90 | 26 | 4 | 25 |
| Calcium | ppm | ASTM D5185m | 2 | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 3 | 3 | 15 |
| Zinc | ppm | ASTM D5185m | | 21 | 2 | 9 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | | 10 | 1 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | <1 |
| Water | % | ASTM D6304 | >0.05 | 0.017 | 0.006 | 0.019 |
| ppm Water | ppm | ASTM D6304 | >500 | 173.8 | 61.3 | 190.8 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 69928 | 1307 | 44950 |
| Particles >6µm | | ASTM D7647 | >1300 | <u> </u> | 198 | <u> </u> |
| Particles >14µm | | ASTM D7647 | >80 | <u> </u> | 7 | 654 |
| Particles >21µm | | ASTM D7647 | >20 | <u> </u> | 2 | <u> </u> |
| Particles >38µm | | ASTM D7647 | >4 | 2 | 0 | <u> </u> |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 0 | 1 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | A 23/21/17 | 18/15/10 | ▲ 23/21/17 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.4 | 0.33 | 0.41 | 0.42 |



0.50

0.00

1.20

0.9

_닅0.72

2²0.48

0.24

0.00

52

5

43

4(

Dec 1


Dec1

(B/HOX Ê0.3 Ê 0.20


OIL ANALYSIS REPORT

method

VISUAL

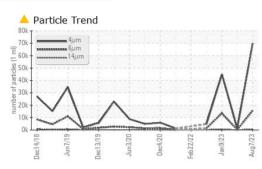




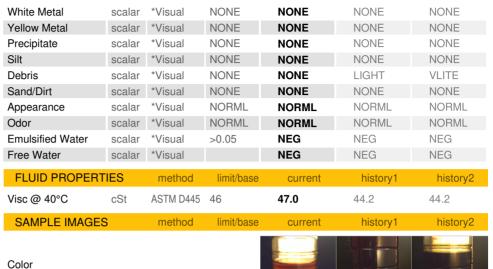

limit/base


current

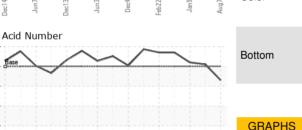



history1

history2

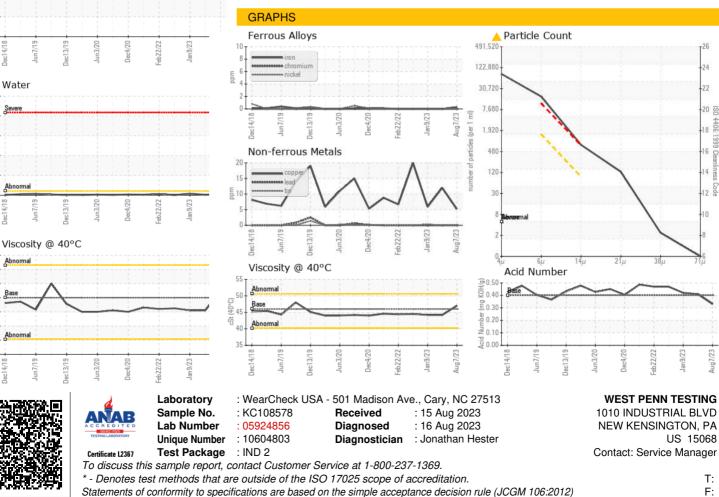

Contact/Location: Service Manager - WESNEWPA