

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **7264724 (S/N 1019)** Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC125275	KC101241	KC85892
Sample Date		Client Info		08 Aug 2023	12 May 2023	19 Nov 2022
Machine Age	hrs	Client Info		22238	20199	15906
Oil Age	hrs	Client Info		22176	4300	5000
Oil Changed	1110	Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	4	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	<1	5	35
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		1	<1	2
Zinc	ppm	ASTM D5185m		<1	3	10
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	2
Sodium	ppm	ASTM D5185m		0	<1	14
Potassium	ppm	ASTM D5185m	>20	<1	1	5
Water	%	ASTM D6304	>0.05	0.012	0.008	0.018
ppm Water	ppm	ASTM D6304	>500	123.9	82.9	183.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1288	3615	2928
Particles >6µm		ASTM D7647	>1300	471	1061	806
Particles >14µm		ASTM D7647	>80	56	A 87	56
Particles >21µm		ASTM D7647	>20	15	4 25	12
Particles >38µm		ASTM D7647	>4	0	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/16/13	▲ 19/17/14	19/17/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.43	0.39	0.43
· · /	U 0					



OIL ANALYSIS REPORT

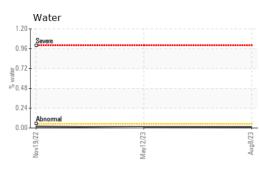

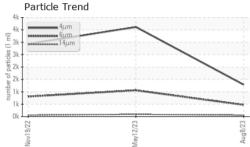

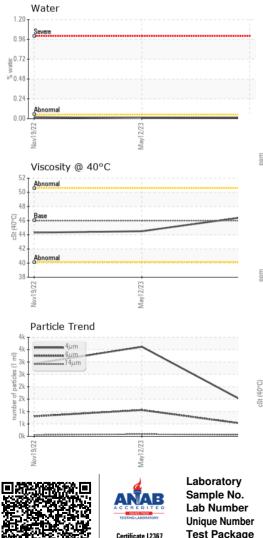

NONE *Visual NONE NONE LIGHT White Metal scalar NONE NONE NONE Yellow Metal scalar *Visual NONE Precipitate scalar *Visual NONE NONE NONE NONE Silt scalar *Visual NONE NONE NONE NONE NONE Debris *Visual NONE LIGHT VLITE scalar NONE Sand/Dirt scalar *Visual NONE NONE NONE NORML Appearance NORML NORML NORML scalar *Visua *Visual NORML NORML NORML Odor scalar NORML *Visual **Emulsified Water** scalar >0.05 NEG NEG NEG Free Water scalar *Visual NEG NEG NEG FLUID PROPERTIES Visc @ 40°C cSt ASTM D445 46 46.6 44.5 44.3 SAMPLE IMAGES Color

Bottom

