

## **OIL ANALYSIS REPORT**



# CATERPILLAR GM02

Biogas Engine

NOT GIVEN (--- GAL)

### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### 🔺 Wear


The iron level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

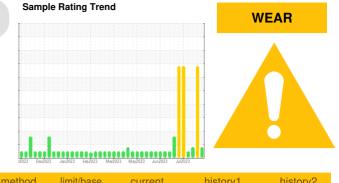



SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0836322	WC0836320	WC0836354
Sample Date		Client Info		14 Aug 2023	13 Aug 2023	09 Aug 2023
Machine Age	hrs	Client Info		64565	64500	64452
Oil Age	hrs	Client Info		61	85	37
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	SEVERE	ABNORMAL
CONTAMINATION	J	method	limit/base	current	history1	history2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>45	<b>A</b> 75	121	<b>6</b> 4
Chromium	ppm	ASTM D5185m	>2	<1	<u> </u>	<1
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m		1	2	2
Lead	ppm	ASTM D5185m		0	0	2
Copper	ppm	ASTM D5185m		0	<1	4
Tin	ppm	ASTM D5185m	>13	0	<1	<1
Vanadium	ppm	ASTM D5185m	210	0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron		ASTM D5185m			0	0
	ppm			0	0	
Barium Maluk darawa	ppm	ASTM D5185m		0		0
Molybdenum	ppm	ASTM D5185m		0	0	2
Manganese	ppm	ASTM D5185m		<1	1	2
Magnesium	ppm					
Calcium		ASTM D5185m		1	4	
	ppm	ASTM D5185m		1470	1466	1305
Phosphorus	ppm	ASTM D5185m ASTM D5185m		1470 395	1466 406	1305 362
Phosphorus Zinc	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m		1470 395 430	1466 406 454	1305 362 397
Phosphorus Zinc	ppm	ASTM D5185m ASTM D5185m		1470 395	1466 406	1305 362
Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	limit/base	1470 395 430 2320	1466 406 454	1305 362 397
Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m		1470 395 430 2320	1466 406 454 2444 history1 57	1305 362 397 2339 history2 27
Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method		1470 395 430 2320 current	1466 406 454 2444 history1	1305 362 397 2339 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	>200	1470 395 430 2320 current 43	1466 406 454 2444 history1 57	1305 362 397 2339 history2 27
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m	>200	1470 395 430 2320 current 43 0	1466 406 454 2444 history1 57 1	1305 362 397 2339 history2 27 5
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m	>200 >20	1470 395 430 2320 current 43 0 0	1466 406 454 2444 history1 57 1 <1	1305 362 397 2339 history2 27 5 4
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>200 >20 limit/base	1470 395 430 2320 current 43 0 0 0 current	1466 406 454 2444 history1 57 1 <1 <1 history1	1305 362 397 2339 history2 27 5 4 history2
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>200 >20 limit/base	1470 395 430 2320 current 43 0 0 0 current 0	1466 406 454 2444 history1 57 1 <1 <1 history1 0.1	1305 362 397 2339 history2 27 5 4 4 history2 0
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm % Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7844	>200 >20 limit/base >20	1470 395 430 2320 current 43 0 0 0 current 0 4.9	1466 406 454 2444 <b>history1</b> 57 1 <1 <1 <b>history1</b> 0.1 5.0	1305 362 397 2339 history2 27 5 4 4 history2 0 4.7
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm ppm ppm ppm ppm ppm ppm % Abs/.1mm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7624	>200 >20 limit/base >20 >30	1470 395 430 2320 current 43 0 0 0 current 0 4.9 15.5	1466 406 454 2444 <b>history1</b> 57 1 <1 <1 <b>history1</b> 0.1 5.0 15.2	1305 362 397 2339 history2 27 5 4 history2 0 4.7 15.3
Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7415	>200 >20 limit/base >20 >30 limit/base	1470 395 430 2320 current 43 0 0 0 current 0 4.9 15.5 current	1466 406 454 2444 <b>history1</b> 57 1 57 1 <1 <1 (1) (1) 5.0 15.2 history1	1305 362 397 2339 history2 27 5 4 history2 0 4.7 15.3 history2





## **OIL ANALYSIS REPORT**



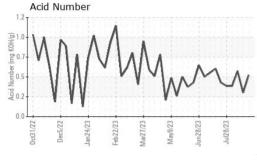





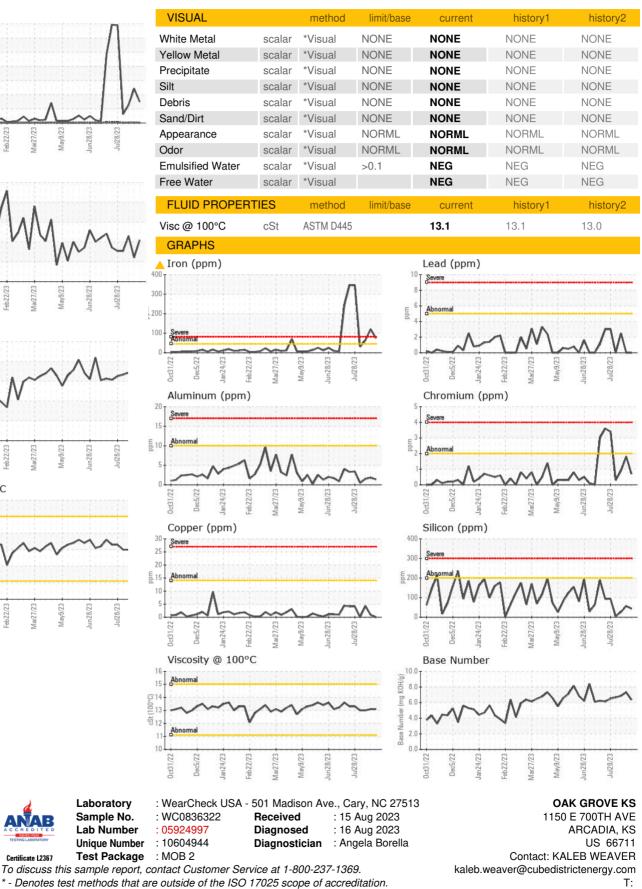

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: