


# **PROBLEM SUMMARY**

Sample Rating Trend

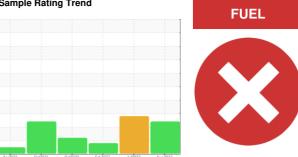



Machine Id **40-157** Component

**Diesel Engine** 

**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)** 

## COMPONENT CONDITION SUMMARY

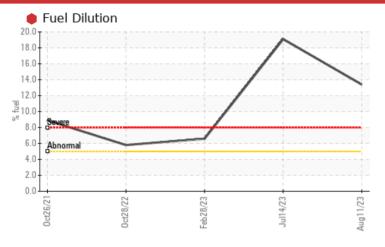

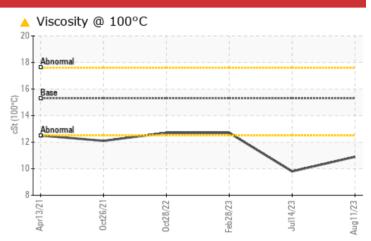

#### **RECOMMENDATION**

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC	TEST R	ESULTS				
Sample Status				SEVERE	SEVERE	ABNORMAL
Fuel	%	ASTM D3524	>5	<b>13.4</b>	19.1	<b>△</b> 6.6
Visc @ 100°C	cSt	ASTM D445	15.3	<b>10.9</b>	9.8	12.7

Customer Id: MANTUL **Sample No.:** WC0738903 Lab Number: 05925344 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

# Action Status Date Done By Description Resample --- ? We recommend an early resample to monitor this condition. Check Fuel/injector System --- ? We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

#### 14 Jul 2023 Diag: Wes Davis





We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.



#### 28 Feb 2023 Diag: Angela Borella

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. The oil is no longer serviceable due to the presence of contaminants.

# view report

#### 28 Oct 2022 Diag: Wes Davis

FUEL




The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.





# **OIL ANALYSIS REPORT**

Sample Rating Trend





Machine Id 40-157 Component

**Diesel Engine** 

**CONOCO PHILLIPS GUARDOL ECT 15W40 (--- GAL)** 

# DIAGNOSIS

#### Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


#### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

) ( GAL)		Apr2021	Oct2021 Oct2022	Feb2023 Jul2023	Aug2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0738903	WC0818684	WC0793259
Sample Date		Client Info		11 Aug 2023	14 Jul 2023	28 Feb 2023
Machine Age	hrs	Client Info		5304	5304	4746
Oil Age	hrs	Client Info		5304	585	58
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				SEVERE	SEVERE	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7	10	11
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	<1	2
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	0	1	0
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES						
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	method ASTM D5185m	limit/base	current 53	history1 43	history2 63
	ppm				•	
Boron		ASTM D5185m		53	43	63
Boron Barium	ppm	ASTM D5185m ASTM D5185m		53 0	43 0	63 0
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m		53 0 0	43 0 2	63 0 16
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	85	53 0 0 <1	43 0 2 <1	63 0 16 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	85 350	53 0 0 <1 605	43 0 2 <1 590	63 0 16 <1 526
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	350 1800	53 0 0 <1 605 1059	43 0 2 <1 590 1096	63 0 16 <1 526 1389
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	350 1800 1000	53 0 0 <1 605 1059 854	43 0 2 <1 590 1096 830	63 0 16 <1 526 1389 948
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	350 1800 1000 1100	53 0 0 <1 605 1059 854 1013	43 0 2 <1 590 1096 830 984	63 0 16 <1 526 1389 948 1100
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	350 1800 1000 1100 3500	53 0 0 <1 605 1059 854 1013 3540	43 0 2 <1 590 1096 830 984 3360	63 0 16 <1 526 1389 948 1100 3481
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500	53 0 0 <1 605 1059 854 1013 3540 current	43 0 2 <1 590 1096 830 984 3360 history1	63 0 16 <1 526 1389 948 1100 3481 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500 limit/base >25	53 0 0 <1 605 1059 854 1013 3540 current	43 0 2 <1 590 1096 830 984 3360 history1	63 0 16 <1 526 1389 948 1100 3481 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500 limit/base >25 >20	53 0 0 <1 605 1059 854 1013 3540 current 3	43 0 2 <1 590 1096 830 984 3360 history1 4	63 0 16 <1 526 1389 948 1100 3481 history2 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500 limit/base >25 >20	53 0 0 <1 605 1059 854 1013 3540 current 3 2	43 0 2 <1 590 1096 830 984 3360 history1 4 3	63 0 16 <1 526 1389 948 1100 3481 history2 4 4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500 limit/base >25 >20 >5	53 0 0 0 <1 605 1059 854 1013 3540  current 3 2 2 113.4	43 0 2 <1 590 1096 830 984 3360 history1 4 3 2	63 0 16 <1 526 1389 948 1100 3481 history2 4 4 2 6.6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500 limit/base >25 >20 >5 limit/base	53 0 0 0 <1 605 1059 854 1013 3540  current 3 2 2 13.4  current	43 0 2 <1 590 1096 830 984 3360 history1 4 3 2 19.1 history1	63 0 16 <1 526 1389 948 1100 3481 history2 4 4 2 • 6.6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	350 1800 1000 1100 3500 limit/base >25 >20 >5 limit/base	53 0 0 0 <1 605 1059 854 1013 3540  current 3 2 2 13.4  current 0.3	43 0 2 <1 590 1096 830 984 3360 history1 4 3 2 19.1 history1 0.4	63 0 16 <1 526 1389 948 1100 3481 history2 4 4 2 6.6 history2 0.3
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844	350 1800 1000 1100 3500 limit/base >25 >20 >5	53 0 0 0 <1 605 1059 854 1013 3540 current 3 2 2 13.4 current 0.3 8.8	43 0 2 <1 590 1096 830 984 3360 history1 4 3 2 19.1 history1 0.4 9.9	63 0 16 <1 526 1389 948 1100 3481 history2 4 4 2  6.6 history2 0.3 9.7
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7624	350 1800 1000 1100 3500 limit/base >25 >20 >5 limit/base >3 >20 >30 limit/base	53 0 0 0 <1 605 1059 854 1013 3540 current 3 2 2 13.4 current 0.3 8.8 19.5	43 0 2 <1 590 1096 830 984 3360 history1 4 3 2 19.1 history1 0.4 9.9 20.1	63 0 16 <1 526 1389 948 1100 3481 history2 4 4 2  6.6 history2 0.3 9.7 20.5



# OIL ANALYSIS REPORT

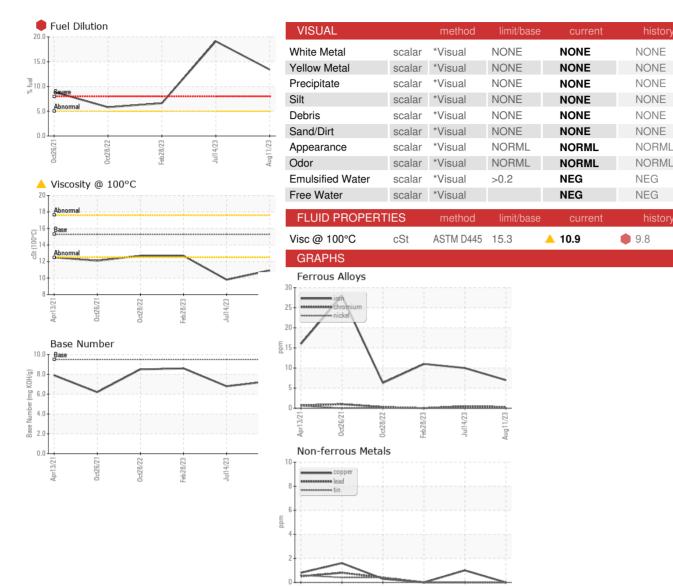





Laboratory Sample No. Lab Number

**Unique Number** 

(100°C) ŝ

Apr13/21

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 15 Aug 2023 : WC0738903 : 05925344 Diagnosed : 10605291

Oct28/22

: 16 Aug 2023 Diagnostician : Wes Davis Test Package : CONST (Additional Tests: PercentFuel, TBN)

Feb28/23

Jul14/23

Aug11/23

Feb28/23

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Viscosity @ 100°C



Oct28/22

Base Number

0ct26/21

10.0

0.0

(mg K0H/g)

5601 S 122ND E AVE TULSA, OK US 74146

NONE

NONE

NONE

NONE

NONE

NONE

**NORML** 

NORML

NEG

NEG

12.7

Contact: BEN CALDWELL kevin.marson@wearcheck.com T: (918)728-5749

F: