

## **OIL ANALYSIS REPORT**

#### Sample Rating Trend



# KAESER 7974868

### Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Ju	2022	Oct2022 Aug20	23	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005521	KCP47341	KCP51605
Sample Date		Client Info		08 Aug 2023	24 Oct 2022	20 Jul 2022
Machine Age	hrs	Client Info		5631	3153	2726
Oil Age	hrs	Client Info		0	427	2726
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	<1	<1	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	36	75	31
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	81	90	68
Calcium	ppm	ASTM D5185m	0	0	<1	2
Phosphorus	ppm	ASTM D5185m	0	0	1	17
Zinc	ppm	ASTM D5185m	0	0	2	5
Sulfur	ppm	ASTM D5185m	23500	23655	22427	22484
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		18	10	16
Potassium	ppm	ASTM D5185m	>20	3	0	2
Water	%	ASTM D6304	>0.05	0.027	0.016	0.029
ppm Water	ppm	ASTM D6304	>500	275.3	168.7	295.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		476	4359	1929
Particles >6µm		ASTM D7647	>1300	120	769	656
Particles >14µm		ASTM D7647	>80	13	30	52
Particles >21µm		ASTM D7647	>20	5	5	7
Particles >38µm		ASTM D7647	>4	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	16/14/11	19/17/12	18/17/13
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.39	0.46	0.36



## **OIL ANALYSIS REPORT**

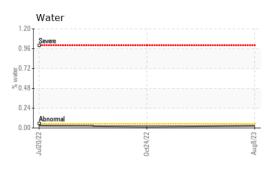



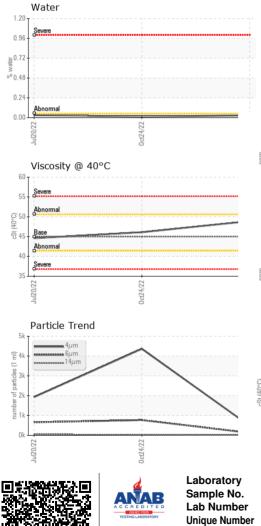

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	ΓIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	48.9	46.1	44.6
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						
Bottom				()		



