


PROBLEM SUMMARY

KAESER ASD 30 8281231 (S/N 1243)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

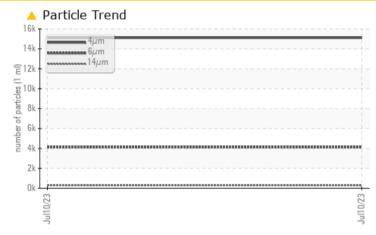

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL						
Particles >6µm	ASTM D7647 >1300) 🔺 4123						
Particles >14µm	ASTM D7647 >80	▲ 287						
Particles >21µm	ASTM D7647 >20	<mark>▲ 89</mark>						
Particles >38µm	ASTM D7647 >4	5						
Oil Cleanliness	ISO 4406 (c) >17/1	3 🔺 19/15						


Customer Id: ARASPR Sample No.: KCPA003487 Lab Number: 05925473 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

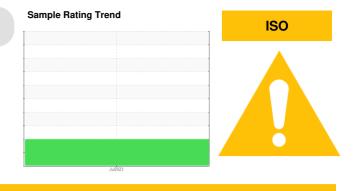

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

KAESER ASD 30 8281231 (S/N 1243)

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA003487		
Sample Date		Client Info		10 Jul 2023		
Machine Age	hrs	Client Info		3622		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	10		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	15		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	84		
Sulfur	ppm	ASTM D5185m	23500	21257		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	8		
Water	%	ASTM D6304	>0.05	0.023		
ppm Water	ppm	ASTM D6304	>500	239.9		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15109		
•		ASTM D7647 ASTM D7647	>1300	15109 4 123		
Particles >6µm			>1300 >80			
Particles >6µm		ASTM D7647	>80	4123		
Particles >6μm Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647	>80	▲ 4123 ▲ 287		
Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	 ▲ 4123 ▲ 287 ▲ 89 		
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	 ▲ 4123 ▲ 287 ▲ 89 ▲ 5 		
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4 >3	 ▲ 4123 ▲ 287 ▲ 89 ▲ 5 0 		





OIL ANALYSIS REPORT

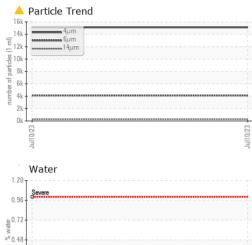



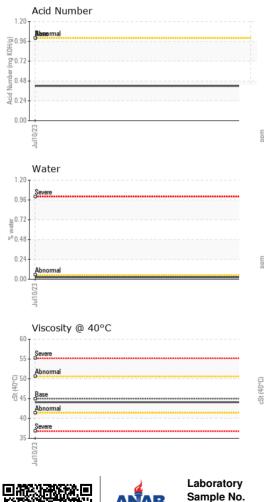

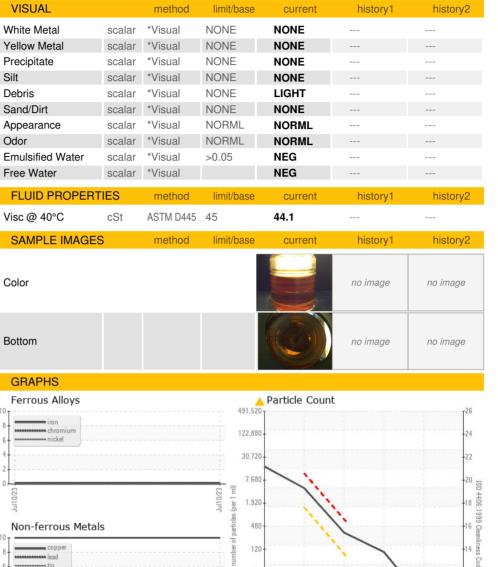

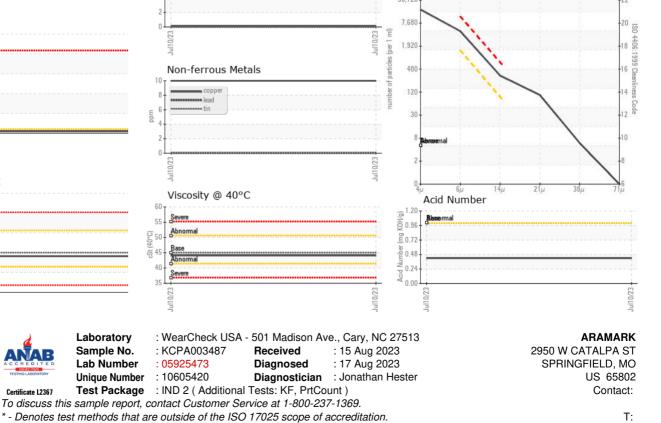

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367