


PROBLEM SUMMARY

KAESER 8670318 - YENFENG (S/N 2034)

Compressor

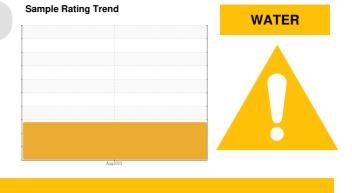

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | |
|--------------------------|--------|------------|-------|----------------|--|--|--|
| Sample Status | | | | ABNORMAL | | | |
| Water | % | ASTM D6304 | >0.05 | 6 0.222 | | | |
| ppm Water | ppm | ASTM D6304 | >500 | A 2220 | | | |
| Silt | scalar | *Visual | NONE | 🔺 MODER | | | |
| Debris | scalar | *Visual | NONE | 🔺 MODER | | | |
| Emulsified Water | scalar | *Visual | >0.05 | 6.2% | | | |

Customer Id: PALFOU Sample No.: WC0795199 Lab Number: 05925494 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

KAESER 8670318 - YENFENG (S/N 2034)

Compressor Fluic

Machine Id

Component

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil. There is a moderate amount of visible silt present in the sample.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------|------------------------------|
| Sample Number | | Client Info | | WC0795199 | | |
| Sample Date | | Client Info | | 08 Aug 2023 | | |
| Machine Age | hrs | Client Info | | 1198 | | |
| Oil Age | hrs | Client Info | | 1110 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >3 | 0 | | |
| Titanium | ppm | ASTM D5185m | >3 | 0 | | |
| Silver | ppm | ASTM D5185m | >2 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >50 | 1 | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| | | | | | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| ADDITIVES Boron | ppm | method ASTM D5185m | limit/base | current 0 | history1 | history2 |
| | ppm ppm | | limit/base | | | |
| Boron | | ASTM D5185m | | 0 | | |
| Boron Barium | ppm | ASTM D5185m ASTM D5185m | | 0 15 | | |
| Boron Barium Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | | 0 15 0 | | |
| Boron Barium Molybdenum Manganese | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 | 0 15 0 0 | | |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 90 | 0 15 0 0 44 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 90 | 0 15 0 0 44 0 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 90 | 0 15 0 0 44 0 3 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 90 | 0 15 0 0 44 0 3 0 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 90 2 | 0 15 0 44 0 3 0 21978 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 90 90 2 limit/base | 0 15 0 0 44 0 3 0 21978 current | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 90 90 2 limit/base | 0 15 0 0 44 0 3 0 21978 current 0 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m | 90 90 2 limit/base >25 | 0 15 0 0 44 0 3 0 21978 current 0 5 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 90 90 2 limit/base >25 >20 | 0 15 0 0 44 0 3 0 21978 current 0 5 5 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 90 90 2 2 <u>limit/base</u> >25 >20 >0.05 | 0 15 0 0 44 0 3 0 21978 current 0 5 5 5 0.222 | history1 | history2 |


Sample Rating Trend


WATER



OIL ANALYSIS REPORT



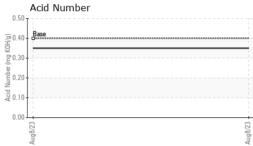



| | VISUAL | | method | limit/base | current | history1 | history2 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------|-------------------------------------|----------------------------------------------------------------------------|
| | White Metal | scalar | *Visual | NONE | NONE | | |
| | Yellow Metal | scalar | *Visual | NONE | NONE | | |
| | Precipitate | scalar | *Visual | NONE | NONE | | |
| | Silt | scalar | *Visual | NONE | A MODER | | |
| | Debris | scalar | *Visual | NONE | A MODER | | |
| | Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Aug8/23 | Appearance | scalar | *Visual | NORML | NORML | | |
| Aur | Odor | scalar | *Visual | NORML | NORML | | |
| | Emulsified Water | scalar | *Visual | >0.05 | 6.2% | | |
| | Free Water | scalar | *Visual | | NEG | | |
| | FLUID PROPERT | TIES | method | limit/base | current | history1 | history2 |
| | Visc @ 40°C | cSt | ASTM D445 | 46 | 43.9 | | |
| | SAMPLE IMAGES | S | method | limit/base | current | history1 | history2 |
| Aug8/23 | Color | | | | | no image | no image |
| | Bottom | | | | | no image | no image |
| | Ferrous Alloys | | | Aug8/23 | | | |
| | Viscosity @ 40°C | | | Aug8/23 Aug8/23 Aug8/23 Aug8/23 Aug8/23 | Acid Number | | Aug623 |
| Laboratory Sample No. Lab Number Unique Number Unique Number Test Package o discuss this sample report, Denotes test methods that tatements of conformity to spe | : WearCheck USA - 5 : WC0795199 I : 05925494 I r : 10605441 I e : IND 2 (Additional To , contact Customer Servi are outside of the ISO 1 | Received Diagnost Diagnost ests: KF ice at 1-8 7025 sco | l : 15 / ed : 17 / ician : Dor) 00-237-1369 pe of accred | ry, NC 275 ⁻ Aug 2023 Aug 2023 Baldridge Baldridge | 13 ELEVATI | FOUI Contact: D dward@elevate | COLUTIONS - EIS 2 HUGHES ST NTAIN INN, SC US 29644 DARRIN WARD |

Page 4 of 4