




PROBLEM SUMMARY



Machine Id
CATERPILLAR 374FL 8399 (S/N XWL00244)
 Component
Right Swing Drive
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

Sample Rating Trend

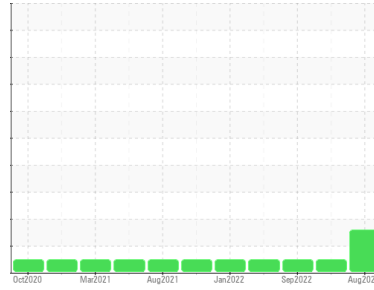


ADDITIVES



COMPONENT CONDITION SUMMARY

▲ Additives

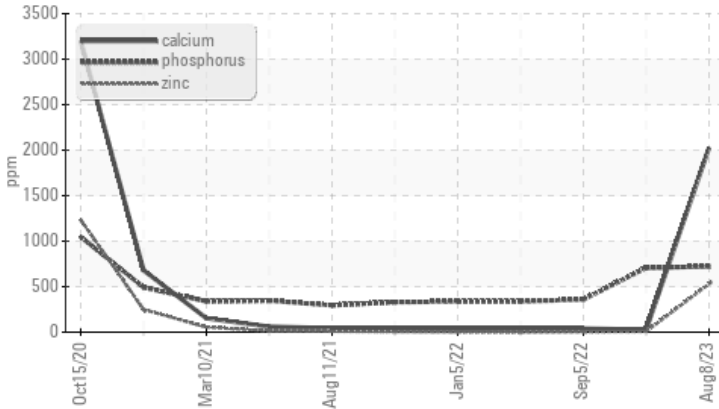

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	NORMAL	NORMAL
Calcium	ppm	ASTM D5185m	150	▲ 2026	28	39
Phosphorus	ppm	ASTM D5185m	1650	▲ 722	707	358
Zinc	ppm	ASTM D5185m	125	▲ 530	7	3
Sulfur	ppm	ASTM D5185m	22500	▲ 6156	15733	1614

Customer Id: TRANEW
 Sample No.: WC0837114
 Lab Number: 05925665
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

24 Feb 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



05 Sep 2022 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



04 Apr 2022 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report






OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 374FL 8399 (S/N XWL00244)
 Component
Right Swing Drive
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

Sample Rating Trend

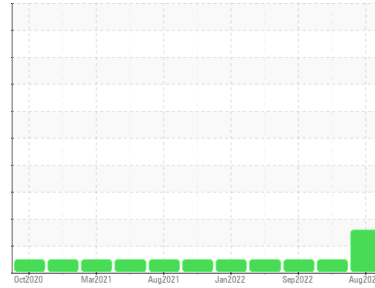

ADDITIVES



DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0837114	WC0791054	WC0734282
Sample Date	Client Info		08 Aug 2023	24 Feb 2023	05 Sep 2022
Machine Age	hrs	Client Info	11478	10432	9738
Oil Age	hrs	Client Info	1046	694	1147
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >400	17	17	13
Chromium	ppm	ASTM D5185m >10	<1	<1	0
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	<1	<1
Aluminum	ppm	ASTM D5185m >25	<1	<1	<1
Lead	ppm	ASTM D5185m >50	0	0	0
Copper	ppm	ASTM D5185m >200	2	<1	<1
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	78	122	203
Barium	ppm	ASTM D5185m 200	<1	0	0
Molybdenum	ppm	ASTM D5185m 12	<1	<1	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 12	6	2	0
Calcium	ppm	ASTM D5185m 150	▲ 2026	28	39
Phosphorus	ppm	ASTM D5185m 1650	▲ 722	707	358
Zinc	ppm	ASTM D5185m 125	▲ 530	7	3
Sulfur	ppm	ASTM D5185m 22500	▲ 6156	15733	1614

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	3	1	2
Sodium	ppm	ASTM D5185m	0	2	0
Potassium	ppm	ASTM D5185m >20	1	<1	0

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	122	95.3	101






OIL ANALYSIS REPORT

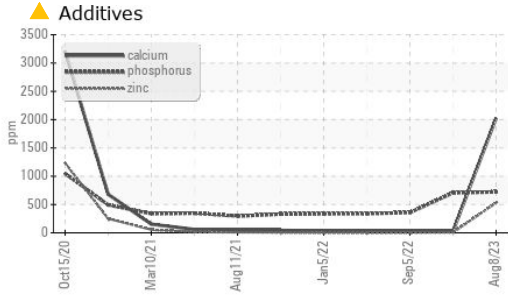

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

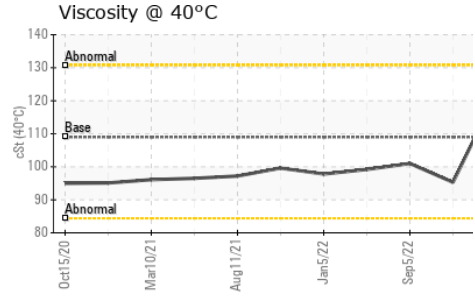

GRAPHS

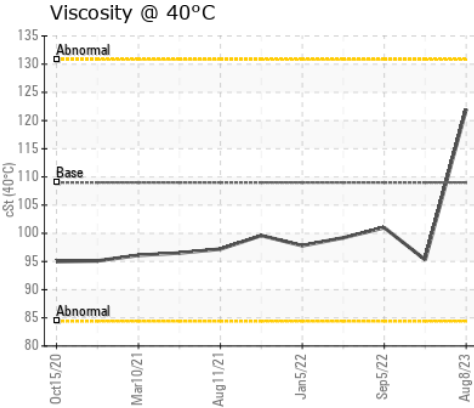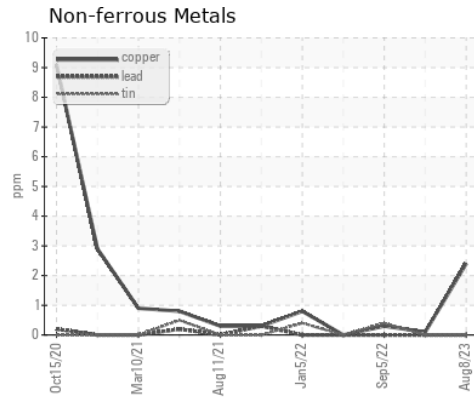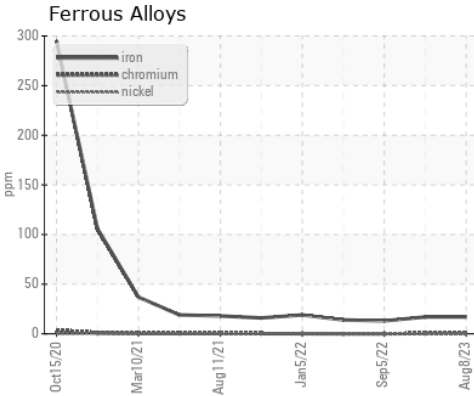

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0837114 **Received** : 15 Aug 2023
Lab Number : 05925665 **Diagnosed** : 17 Aug 2023
Unique Number : 10605612 **Diagnostician** : Jonathan Hester
Test Package : CONST

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mw Wyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)