




PROBLEM SUMMARY






Machine Id
CATERPILLAR D6 LGP 10039 (S/N KEW01125)
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

Sample Rating Trend

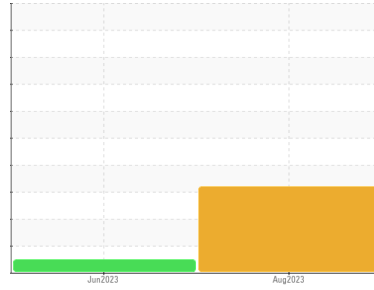

COMPONENT CONDITION SUMMARY

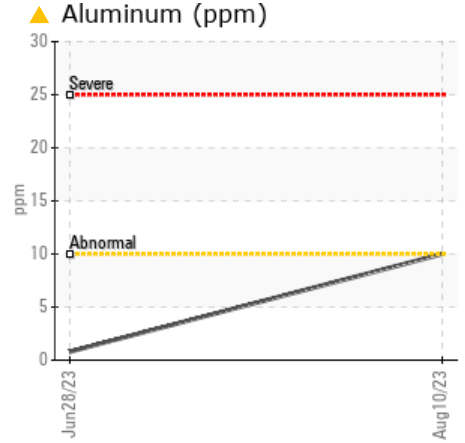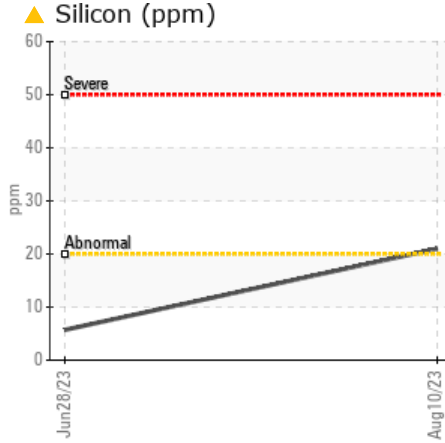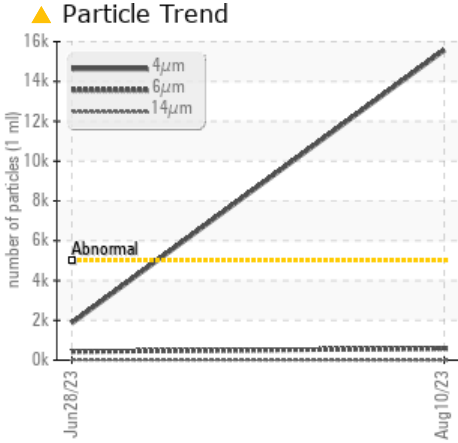

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	---
Aluminum	ppm	ASTM D5185m	>10	▲ 10	<1	---
Silicon	ppm	ASTM D5185m	>20	▲ 21	6	---
Particles >4µm		ASTM D7647	>5000	▲ 15568	1856	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/16/10	18/16/12	---

Customer Id: TRANEW
 Sample No.: WC0837186
 Lab Number: 05925672
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Check Dirt Access	---	---	?	We advise that you check all areas where dirt can enter the system.

HISTORICAL DIAGNOSIS

28 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT



Machine Id
CATERPILLAR D6 LGP 10039 (S/N KEW01125)
 Component
Hydraulic System
 Fluid
NOT GIVEN (--- GAL)

Sample Rating Trend

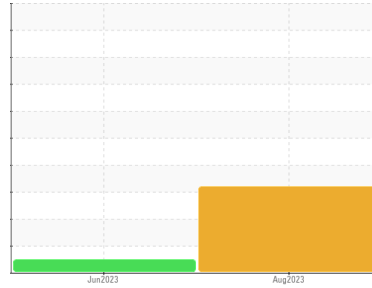

DIRT



DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0837186	WC0816244	---
Sample Date	Client Info		10 Aug 2023	28 Jun 2023	---
Machine Age	hrs	Client Info	1207	558	---
Oil Age	hrs	Client Info	1207	558	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			ABNORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	16	8	---
Chromium	ppm	ASTM D5185m >10	2	1	---
Nickel	ppm	ASTM D5185m >10	0	<1	---
Titanium	ppm	ASTM D5185m	<1	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >10	▲ 10	<1	---
Lead	ppm	ASTM D5185m >10	2	2	---
Copper	ppm	ASTM D5185m >75	15	10	---
Tin	ppm	ASTM D5185m >10	<1	<1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	---
Barium	ppm	ASTM D5185m	1	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m	4	1	---
Calcium	ppm	ASTM D5185m	177	169	---
Phosphorus	ppm	ASTM D5185m	712	711	---
Zinc	ppm	ASTM D5185m	932	935	---
Sulfur	ppm	ASTM D5185m	1956	1838	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	▲ 21	6	---
Sodium	ppm	ASTM D5185m	0	0	---
Potassium	ppm	ASTM D5185m >20	2	<1	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 15568	1856	---
Particles >6µm	ASTM D7647	>1300	586	430	---
Particles >14µm	ASTM D7647	>160	7	23	---
Particles >21µm	ASTM D7647	>40	2	6	---
Particles >38µm	ASTM D7647	>10	0	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/16/10	18/16/12	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.028	1.13	---




OIL ANALYSIS REPORT


▲ Particle Trend

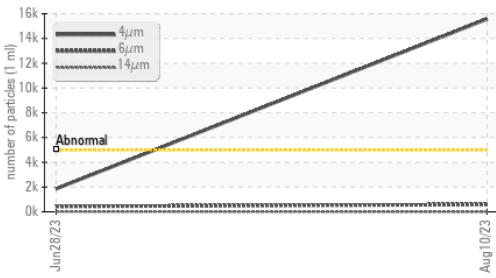

▲ Silicon (ppm)

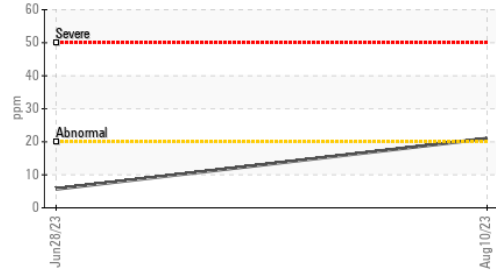


▲ Aluminum (ppm)

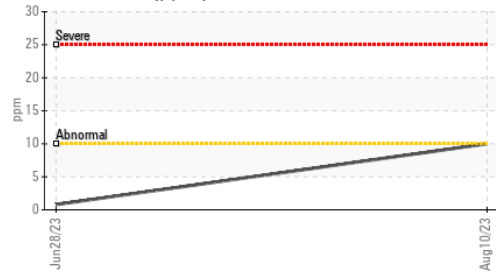

▲ Aluminum (ppm)



Acid Number

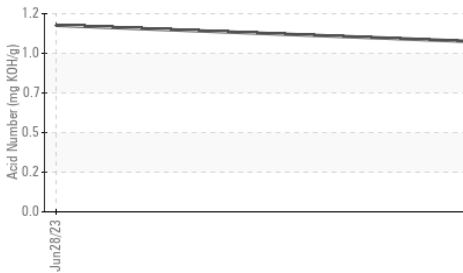

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	40.4	40.7	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color	no image		no image
Bottom	no image		no image

GRAPHS


Ferrous Alloys

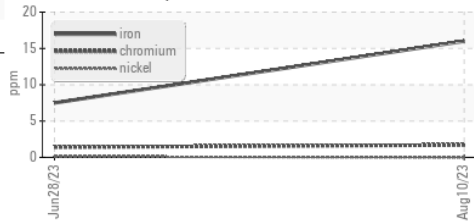


Non-ferrous Metals

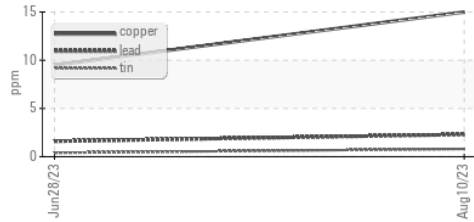

Viscosity @ 40°C

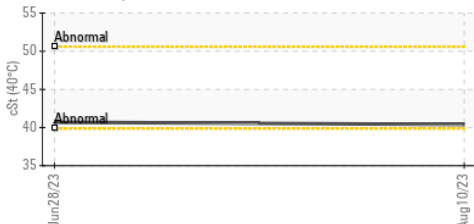

▲ Particle Count

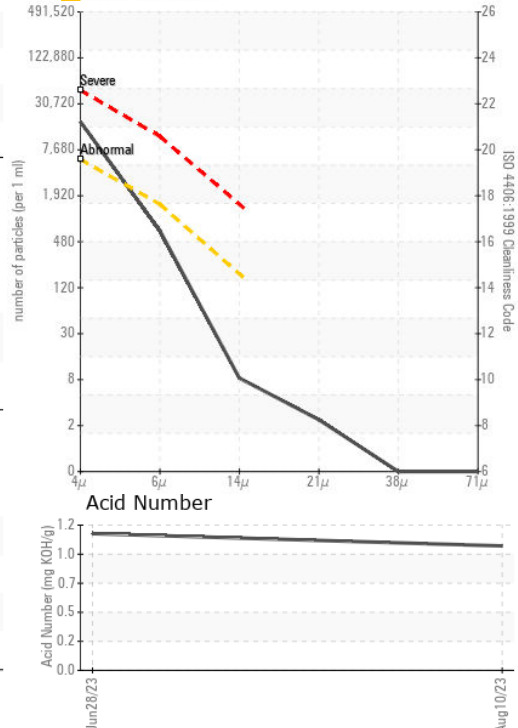

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0837186 **Received** : 15 Aug 2023
Lab Number : **05925672** **Diagnosed** : 18 Aug 2023
Unique Number : 10605619 **Diagnostician** : Jonathan Hester
Test Package : CONST

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mwyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)