


PROBLEM SUMMARY

North Plant-Crystallization Machine Id PU-2512C

Component Hydraulic System Fluid ROYAL PURPLE SYNDRAULIC 46 (20 GAL)

COMPONENT CONDITION SUMMARY

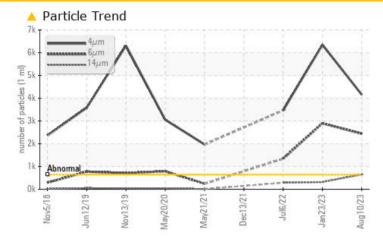

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Sample Rating Trend

PROBLEMATIC TEST RESULTS						
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL	
Particles >4µm	ASTM D7647	>640	🔺 4155	6349	A 3468	
Particles >6µm	ASTM D7647	>160	🔺 2441	<u> </u>	1 344	
Particles >14µm	ASTM D7647	>40	🔺 649	A 315	A 286	
Particles >21µm	ASTM D7647	>10	🔺 250	9 1	1 02	
Particles >38µm	ASTM D7647	>3	<u> </u>	1 0	<u> </u>	
Oil Cleanliness	ISO 4406 (c)	>16/14/12	 19/18/17	🔺 20/19/15	1 9/18/15	

Customer Id: AJIEDD Sample No.: WC0786791 Lab Number: 05926101 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		

HISTORICAL DIAGNOSIS



23 Jan 2023 Diag: Don Baldridge

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

view report

06 Jul 2022 Diag: Don Baldridge



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

13 Dec 2021 Diag: Angela Borella

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.









OIL ANALYSIS REPORT

North Plant-Crystallization PU-2512C

Component Hydraulic System Fluid ROYAL PURPLE SYNDRAULIC 46 (20 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




SAMPLE INFORM		method	limit/hoose	ourroot	historyd	history
			limit/base	current	history1	history2
Sample Number		Client Info		WC0786791	WC0723605	WC0686363
Sample Date		Client Info		10 Aug 2023	23 Jan 2023	06 Jul 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	1	1
Chromium	ppm	ASTM D5185m	>10	3	3	3
Nickel	ppm	ASTM D5185m	>10	1	0	2
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	2	3	2
Copper	ppm	ASTM D5185m	>75	5	5	5
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
			iiiiiivbase			
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	1	0
Calcium	ppm	ASTM D5185m	150	138	157	142
Phosphorus	ppm	ASTM D5185m	670	585	624	573
Zinc	ppm	ASTM D5185m	800	743	824	752
Sulfur	ppm	ASTM D5185m		15750	16493	17372
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2	2	2
Sodium	ppm	ASTM D5185m		0	<1	2
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.1	0.006	0.006	0.011
ppm Water	ppm	ASTM D6304	>1000	69.7	65.7	117.1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	4155	6349	▲ 3468
Particles >6µm		ASTM D7647		<u> </u>	▲ 2899	▲ 1344
Particles >14µm		ASTM D7647	>40	<u> </u>	▲ 315	▲ 286
Particles >21µm		ASTM D7647		<u> </u>	▲ 91	▲ 102
Particles >38µm		ASTM D7647	>3	▲ 10	▲ 10	▲ 7
Particles >71µm		ASTM D7647		0	▲ 3	0
Oil Cleanliness		ISO 4406 (c)	>16/14/12	▲ 19/18/17	▲ 20/19/15	▲ 19/18/15
FLUID DEGRADA		method	limit/base	current	history1	
						history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.77	0.77 Submitted	0.70 By: Alan Britta
					Submined	DV AIAU DUIIA


Report Id: AJIEDD [WUSCAR] 05926101 (Generated: 08/17/2023 11:05:51) Rev: 1


Submitted By: Alan Brittain



OIL ANALYSIS REPORT





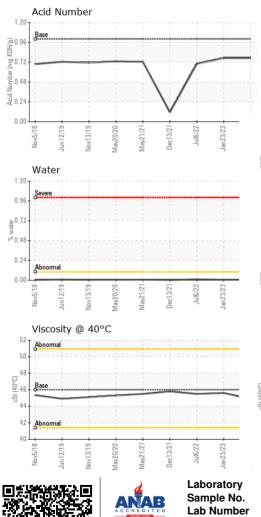

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	VLITE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	44.9	45.6	45.5
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						



Bottom

