

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

AF12-511-2900-2100 FINISHED BOARD STACKING LIFT TABLE HYDRAULICS WEST CENTER

Hydraulic System

MOBIL DTE 10 EXCEL 46 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Aug2023		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0824159		
Sample Date		Client Info		10 Aug 2023		
Machine Age	yrs	Client Info		5		
Dil Age	yrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		12		
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m		2		
Copper	ppm	ASTM D5185m	>20	- <1		
Tin		ASTM D5185m		<1		
Vanadium	ppm		>20	-		
	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		41		
Phosphorus	ppm	ASTM D5185m		273		
Zinc	ppm	ASTM D5185m		129		
Sulfur	ppm	ASTM D5185m		4745		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	3		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.004		
ppm Water	ppm	ASTM D6304	>500	40.6		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1932		
Particles >6µm		ASTM D7647	>1300	472		
Particles >14µm		ASTM D7647	>160	69		
Particles >21µm		ASTM D7647		23		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/13		
FLUID DEGRADA					history	history
		method	limit/base	current	history1	history2
Acid Number (AN) 50:28) Bey: 1	mg KOH/g	ASTM D8045		0.14		
00.201 HEV. 1				5	ubmitted Bv: CA	

Report Id: ARAGRAUS [WUSCAR] 05926112 (Generated: 08/18/2023 12:50:28) Rev: 1

Submitted By: CAIDEN ASHMUN



OIL ANALYSIS REPORT

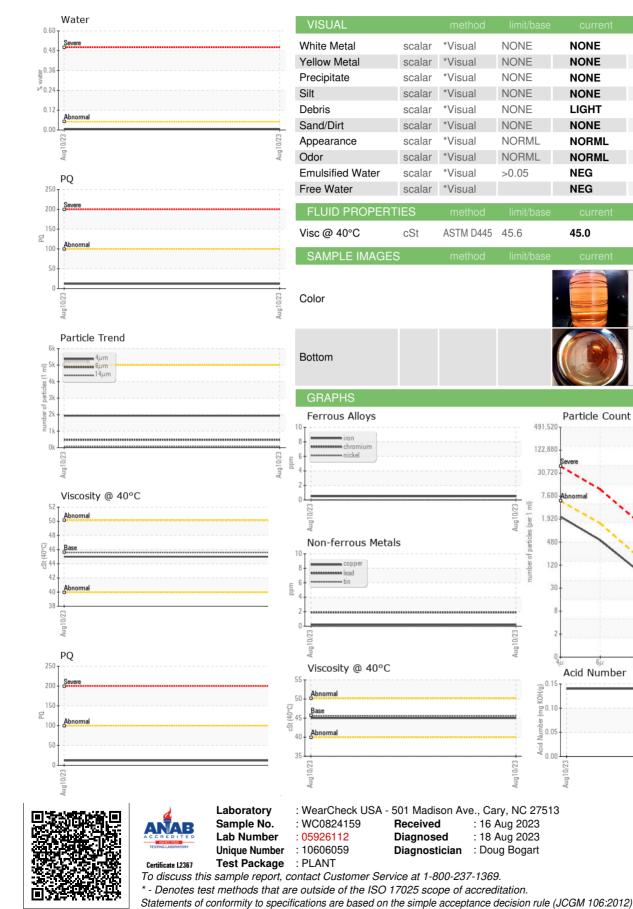

21µ

384

ARAUCO - GRAYLING

5851 ARAUCO ROAD

Contact: JOSEPH GREEN

joseph.green@arauco.com

GRAYLING, MI

US 49738

T:

F:

no image

no image

no image

no image

4406

:1999 Cle

14

Page 2 of 2