


## **PROBLEM SUMMARY**

## North Plant-Purification Machine Id BL2404B

Component Bearing Lube Fluid ROYAL PURPLE SYNFILM GT 46 (14 GAL)

## COMPONENT CONDITION SUMMARY

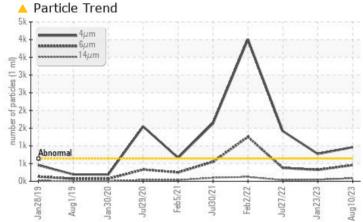

#### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Juľ Janí Aug <sup>1</sup>					
PROBLEMATIC T	EST RESULTS				
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>640	<u> </u>	<b>A</b> 772	<b>1</b> 415
Particles >6µm	ASTM D7647	>160	<u> </u>	<b>A</b> 322	<b>A</b> 379
Particles >14µm	ASTM D7647	>40	<u> </u>	<b>4</b> 5	33
Particles >21µm	ASTM D7647	>10	<b>4</b> 34	<b>1</b> 4	10
Oil Cleanliness	ISO 4406 (c)	>16/14/12	<u> </u>	▲ 17/16/13	▲ 18/16/12


Customer Id: AJIEDD Sample No.: WC0786781 Lab Number: 05926134 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

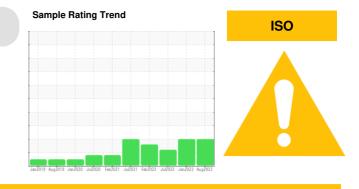

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		

### **HISTORICAL DIAGNOSIS**



23 Jan 2023 Diag: Don Baldridge

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

## 27 Jul 2022 Diag: Doug Bogart



We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

02 Feb 2022 Diag: Doug Bogart

We recommend you service the filters on this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.









## **OIL ANALYSIS REPORT**

## Area North Plant-Purification BL2404B Component

Bearing Lube Fluid ROYAL PURPLE SYNFILM GT 46 (14 GAL)

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

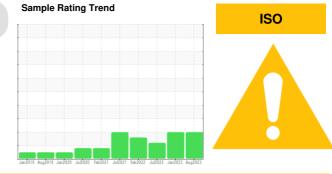



SAMPLE INFORM		method	limit/base	current	history1	history2
Sample Number		Client Info		WC0786781	WC0765965	WC0686409
Sample Date		Client Info		10 Aug 2023	23 Jan 2023	27 Jul 2022
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	2	2	2
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	1
Aluminum	ppm	ASTM D5185m	>2	0	0	2
Lead	ppm	ASTM D5185m	>25	2	<1	1
Copper	ppm	ASTM D5185m	>7	1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	0	1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm		0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	95	60	63	56
Calcium	ppm	ASTM D5185m	0	28	35	32
Phosphorus	ppm	ASTM D5185m	0	3	5	11
Zinc	ppm	ASTM D5185m	0	4	2	<1
Sulfur	ppm	ASTM D5185m	15000	19458	18455	20681
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	<1	2
Potassium	ppm	ASTM D5185m	>20	1	1	0
Water	%	ASTM D6304	>0.1	0.021	0.008	0.023
ppm Water	ppm	ASTM D6304		211.7	88.4	235.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	<b>963</b>	▲ 772	▲ 1415
Particles >6µm		ASTM D7647		<u> </u>	▲ 322	▲ 379
Particles >14µm		ASTM D7647	>40	<u> </u>	▲ 45	33
Particles >21µm		ASTM D7647		<u>▲</u> 34	▲ 14	10
Particles >38µm		ASTM D7647	>3	1	1	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/14/12		▲ 17/16/13	▲ 18/16/12
FLUID DEGRADA		( )				
		method	limit/base	current	history1	history2
Acid Number (AN) (19:32) Rev: 1	mg KOH/g	ASTM D8045		0.33	0.30 Submitted	0.32 Bv: Alan Britta
19.32) Rev: 1					Supmitted	DV: AIAN Britta



# **OIL ANALYSIS REPORT**

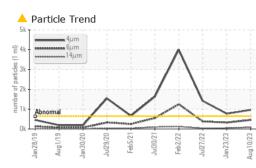

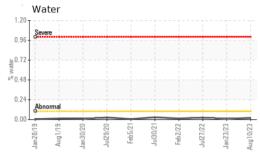

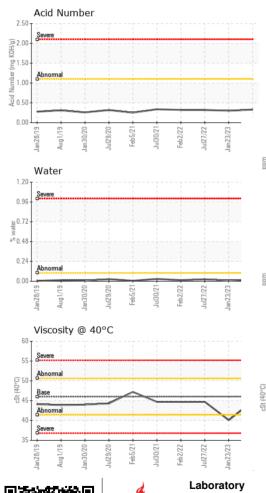

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	44.8	40.1	44.7
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color			,			
Bottom						

