

# **OIL ANALYSIS REPORT**

## NOT GIVEN ELGI MOECC37025 - LANE MFG Component

Compressor

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.



Sample Rating Trend



NORMAL


Sample Number       Client Info       UCH05926190           Sample Date       Client Info       14 Jul 2023           Machine Age       hrs       Client Info       25613           Oil Age       hrs       Client Info       0           Oil Age       hrs       Client Info       0           Oil Changed       Client Info       N/A            Sample Status        NORMAL            WEAR METALS       method       limit/base       current       history1          Iron       ppm       ASTM D5185m<>50       0           Chromium       ppm       ASTM D5185m<>10       0           Nickel       ppm       ASTM D5185m       0           Silver       ppm       ASTM D5185m       0           Aluminum       ppm       ASTM D5185m       >25       0	- - - history2
Machine Age         hrs         Client Info         25613             Oil Age         hrs         Client Info         0	- - - history2
Oil Age         hrs         Client Info         0	- - history2
Oil Changed         Client Info         N/A             Sample Status         Image: Client Info         NORMAL <td>- - history2 </td>	- - history2 
Sample Status         method         limit/base         current         history1           Iron         ppm         ASTM D5185m         >50         0            Chromium         ppm         ASTM D5185m         >10         0            Nickel         ppm         ASTM D5185m         0          1           Titanium         ppm         ASTM D5185m         0          1           Silver         ppm         ASTM D5185m         0          1	history2 
WEAR METALS         method         limit/base         current         history1           Iron         ppm         ASTM D5185m         >50         0            Chromium         ppm         ASTM D5185m         >10         0            Nickel         ppm         ASTM D5185m         0            Titanium         ppm         ASTM D5185m         0            Silver         ppm         ASTM D5185m         0	history2 
Iron         ppm         ASTM D5185m         >50         0            Chromium         ppm         ASTM D5185m         >10         0            Nickel         ppm         ASTM D5185m         0            Titanium         ppm         ASTM D5185m         0            Silver         ppm         ASTM D5185m         0	
Chromium         ppm         ASTM D5185m         >10         0            Nickel         ppm         ASTM D5185m         0            Titanium         ppm         ASTM D5185m         0            Silver         ppm         ASTM D5185m         0	
Nickel         ppm         ASTM D5185m         0            Titanium         ppm         ASTM D5185m         0            Silver         ppm         ASTM D5185m         0	
Titanium         ppm         ASTM D5185m         0            Silver         ppm         ASTM D5185m         0	
Silver         ppm         ASTM D5185m         0	
PP	
Aluminum ppm ASTM D5185m > 25	
Lead ppm ASTM D5185m >25 0	
Copper ppm ASTM D5185m >50 <1	
Tin ppm ASTM D5185m >15 0	
Vanadium ppm ASTM D5185m <1	
Cadmium         ppm         ASTM D5185m         0	
ADDITIVES method limit/base current history1	history2
Boron ppm ASTM D5185m 0	
Barium ppm ASTM D5185m 0	
Molybdenum ppm ASTM D5185m 0	
Manganese ppm ASTM D5185m 0	
Magnesium ppm ASTM D5185m 1	
Calcium         ppm         ASTM D5185m         0	
Phosphorus ppm ASTM D5185m 6	
Zinc ppm ASTM D5185m 0	
Sulfur         ppm         ASTM D5185m         7	
CONTAMINANTS method limit/base current history1	history2
Silicon         ppm         ASTM D5185m         >25         1	
Sodium         ppm         ASTM D5185m         <1	
Potassium         ppm         ASTM D5185m         >20         <1	
FLUID DEGRADATION method limit/base current history1	history2
Acid Number (AN)         mg KOH/g         ASTM D8045         0.33	
VISUAL method limit/base current history1	history2
White Metal scalar *Visual NONE LIGHT	
Yellow Metal scalar *Visual NONE NONE	
Precipitate scalar *Visual NONE NONE	
Silt scalar *Visual NONE NONE	
Debris scalar *Visual NONE NONE	
Sand/Dirt scalar *Visual NONE NONE	
Appearance scalar *Visual NORML NORML	
Appearancescalar*VisualNORMLNORMLOdorscalar*VisualNORMLNORML	
Appearance scalar *Visual NORML NORML	

Report Id: UCFLUMAN [WUSCAR] 05926190 (Generated: 08/17/2023 14:27:10) Rev: 1

Contact/Location: TREY WEEKS - UCFLUMAN



# **OIL ANALYSIS REPORT**

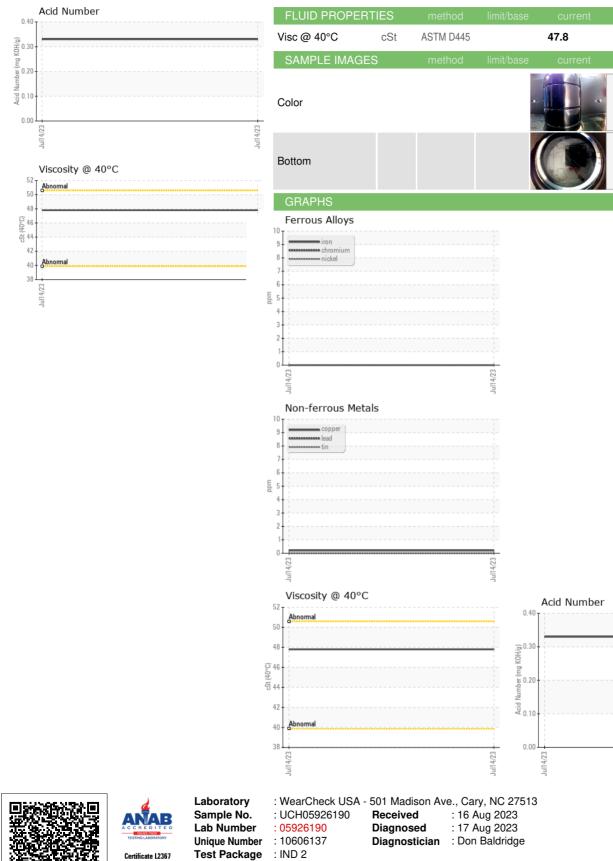

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

no image

no image

no image

no image

FLUID FLOW

MANNING, SC

US 29102

Т:

F:

459 NORTH BROOKS ST

Contact: TREY WEEKS

treyweeks@fluidflow.com