


PROBLEM SUMMARY

S-460 [W06010] Machine Id KAESER 4702067 - M&R PRINTING (S/N 1038)

Compressor



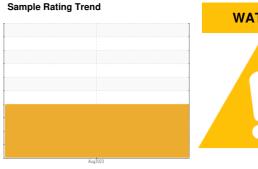

COMPONENT CONDITION SUMMARY



RECOMMENDATION

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS							
Sample Status				ATTENTION			
Water	%	ASTM D6304	>0.05	△ 0.325			
ppm Water	ppm	ASTM D6304	>500	3250			
Appearance	scalar	*Visual	NORML	▲ HAZY			
Emulsified Water	scalar	*Visual	>0.05	0.2%			
Free Water	scalar	*Visual		<u></u> >10%			

Customer Id: UCAIRSID Sample No.: UCH05926205 Lab Number: 05926205 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com


RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		
Resample			?	We recommend an early resample to monitor this condition.		



OIL ANALYSIS REPORT

\$-460 [W06010] KAESER 4702067 - M&R PRINTING (S/N 1038)

Compressor





DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. Excessive free water present.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMA	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH05926205		
Sample Date		Client Info		09 Aug 2023		
Machine Age	hrs	Client Info		460		
Oil Age	hrs	Client Info		460		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron p	ppm	ASTM D5185m	>50	5		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead p	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	3		
Tin p	ppm	ASTM D5185m	>10	0		
Vanadium p	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron p	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		1		
	ppm	ASTM D5185m	90	21		
Calcium	ppm	ASTM D5185m	2	4		
Phosphorus p	ppm	ASTM D5185m		6		
	ppm	ASTM D5185m		72		
Sulfur	ppm	ASTM D5185m		20553		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	△ 0.325		
ppm Water	ppm	ASTM D6304	>500	▲ 3250		
FLUID DEGRADAT	ION	method	limit/base	current	history1	history2
	1/011/	10TH B00:-	0.1			


0.32

Acid Number (AN)

mg KOH/g ASTM D8045 0.4



OIL ANALYSIS REPORT

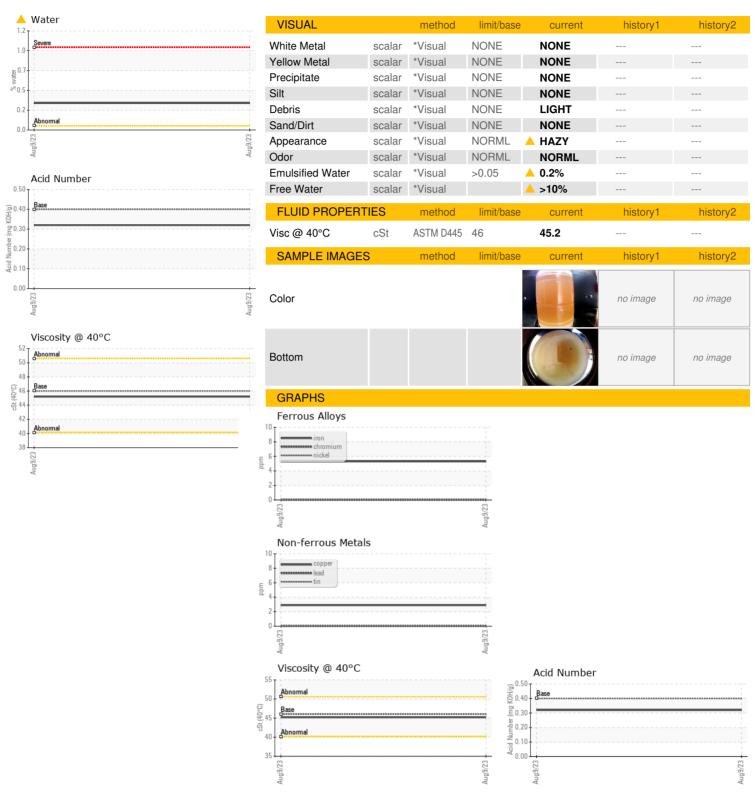





Laboratory Sample No. Lab Number Unique Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : UCH05926205 : 05926205

: 10606152

Received Diagnosed

Diagnostician : Don Baldridge

: 16 Aug 2023 : 17 Aug 2023

Test Package : IND 2 (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AIR HANDLING EQUIPMENT INC

Contact/Location: CRISTI CURL - UCAIRSID

1389 RIVERSIDE DR SIDNEY, OH US 45365

Contact: CRISTI CURL

cristi@ahequip.net T:

F: (937)492-3147