




PROBLEM SUMMARY

Sample Rating Trend

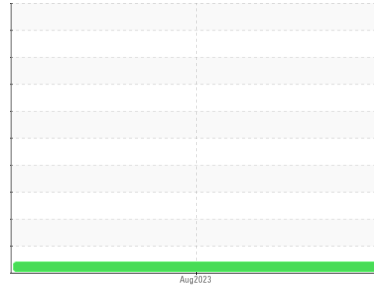

VISCOSITY



Machine Id

2400

Component


Diesel Engine

Fluid


CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C

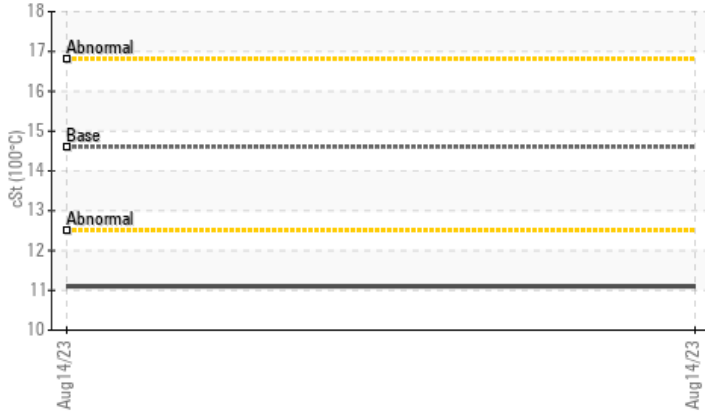

Aluminum (ppm)

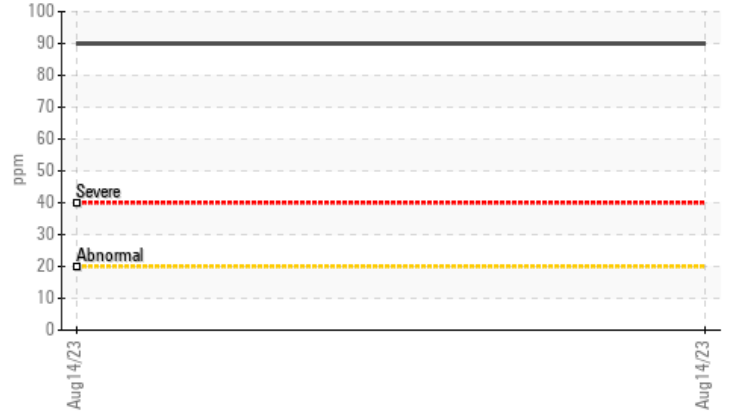

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Visc @ 100°C	cSt	ASTM D445	14.6	▲ 11.1	---	---

Customer Id: ERGMAG601

Sample No.: WC0829022

Lab Number: 05926614

Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:

Sean Felton +1 919-379-4092

sfelton@wearcheckusa.com

To change component or sample information:

Customer Service +1 1-800-237-1369

customerservice@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

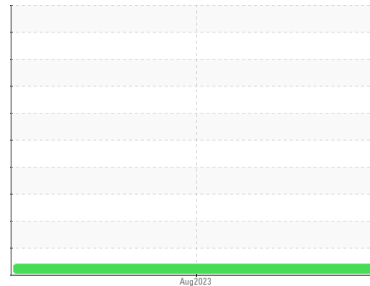

VISCOSITY



Machine Id
2400

Component

Diesel Engine

Fluid

CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0829022	---	---
Sample Date	Client Info		14 Aug 2023	---	---
Machine Age	mls	Client Info	20404	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	64	---	---
Chromium	ppm	ASTM D5185m >20	5	---	---
Nickel	ppm	ASTM D5185m >4	1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	<1	---	---
Aluminum	ppm	ASTM D5185m >20	90	---	---
Lead	ppm	ASTM D5185m >40	3	---	---
Copper	ppm	ASTM D5185m >330	28	---	---
Tin	ppm	ASTM D5185m >15	3	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	44	---	---
Barium	ppm	ASTM D5185m	4	---	---
Molybdenum	ppm	ASTM D5185m	16	---	---
Manganese	ppm	ASTM D5185m	5	---	---
Magnesium	ppm	ASTM D5185m	701	---	---
Calcium	ppm	ASTM D5185m	1238	---	---
Phosphorus	ppm	ASTM D5185m 760	669	---	---
Zinc	ppm	ASTM D5185m 800	811	---	---
Sulfur	ppm	ASTM D5185m 3000	2758	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	42	---	---
Sodium	ppm	ASTM D5185m	4	---	---
Potassium	ppm	ASTM D5185m >20	238	---	---
Fuel	%	ASTM D3524 >5	0.4	---	---

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	9.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.1	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 10	5.9	---	---







OIL ANALYSIS REPORT

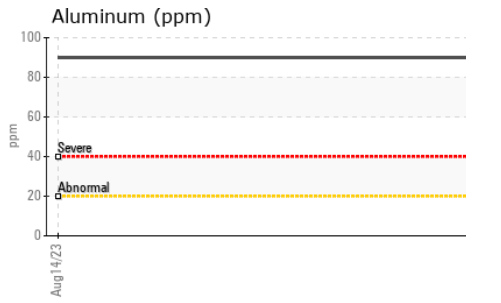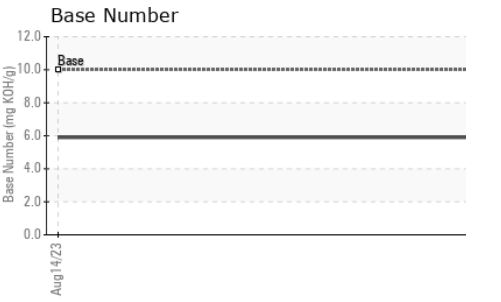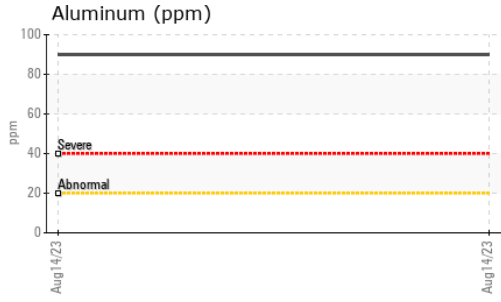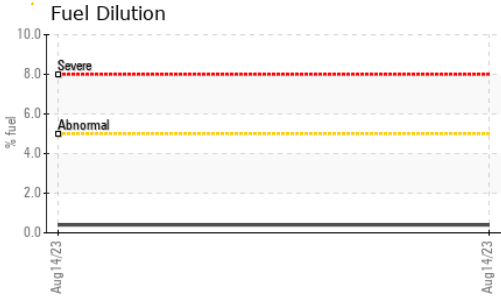

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.6	▲ 11.1	---	---

GRAPHS

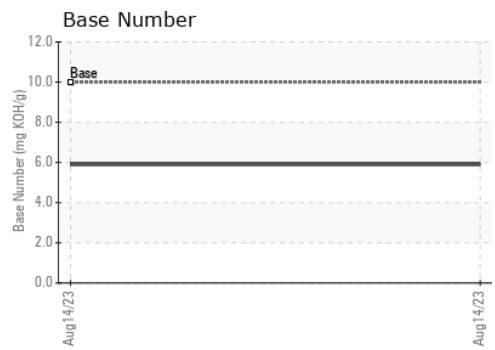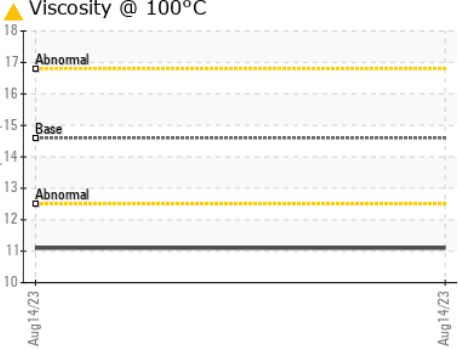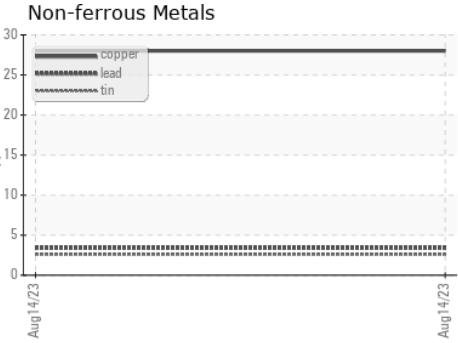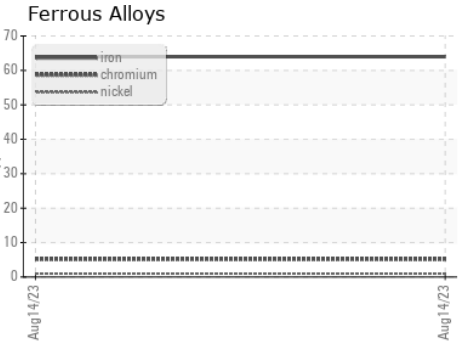

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0829022 **Received** : 16 Aug 2023
Lab Number : 05926614 **Diagnosed** : 18 Aug 2023
Unique Number : 10606561 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Ergon Trucking Inc. - MAG601
 11337 State Route 800
 Magnolia, OH
 US 44643
 Contact: Eddy Smith
 eddy.smith@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)