



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
2851073

Component
Hydraulic System

Fluid
MOBIL UNIVIS N-C 32 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0521460	---	---
Sample Date	Client Info	10 Aug 2023	---	---
Machine Age	hrs Client Info	213	---	---
Oil Age	hrs Client Info	213	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ATTENTION	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	2	---	---
Chromium ppm ASTM D5185m	>10	0	---	---
Nickel ppm ASTM D5185m	>10	0	---	---
Titanium ppm ASTM D5185m		<1	---	---
Silver ppm ASTM D5185m		0	---	---
Aluminum ppm ASTM D5185m	>10	0	---	---
Lead ppm ASTM D5185m	>10	0	---	---
Copper ppm ASTM D5185m	>75	2	---	---
Tin ppm ASTM D5185m	>10	0	---	---
Vanadium ppm ASTM D5185m		<1	---	---
Cadmium ppm ASTM D5185m		<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		0	---	---
Barium ppm ASTM D5185m		0	---	---
Molybdenum ppm ASTM D5185m		2	---	---
Manganese ppm ASTM D5185m		<1	---	---
Magnesium ppm ASTM D5185m		21	---	---
Calcium ppm ASTM D5185m		86	---	---
Phosphorus ppm ASTM D5185m		363	---	---
Zinc ppm ASTM D5185m		459	---	---
Sulfur ppm ASTM D5185m		3124	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>20	1	---	---
Sodium ppm ASTM D5185m		1	---	---
Potassium ppm ASTM D5185m	>20	2	---	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	▲ 7736	---	---
Particles >6µm ASTM D7647	>1300	1049	---	---
Particles >14µm ASTM D7647	>160	64	---	---
Particles >21µm ASTM D7647	>40	18	---	---
Particles >38µm ASTM D7647	>10	1	---	---
Particles >71µm ASTM D7647	>3	0	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	▲ 20/17/13	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		0.47	---	---



OIL ANALYSIS REPORT

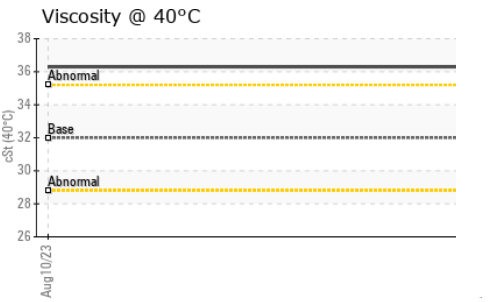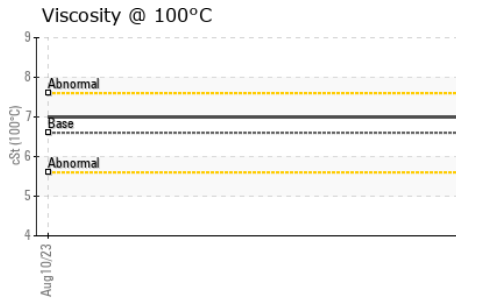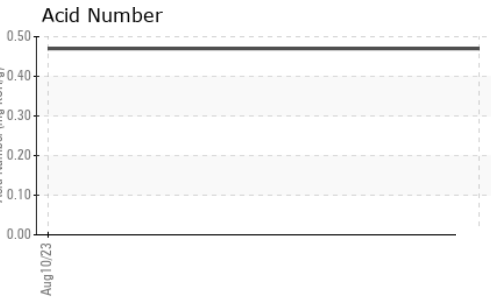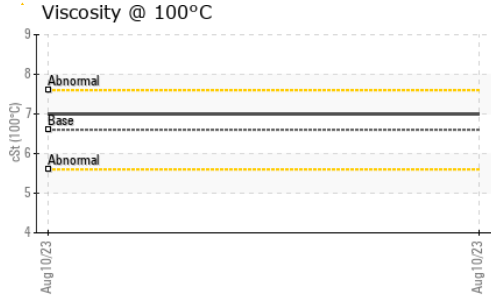






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	32	36.3	---	---
Visc @ 100°C	cSt	ASTM D445	6.6	7	---	---
Viscosity Index (VI)	Scale	ASTM D2270	168	157	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

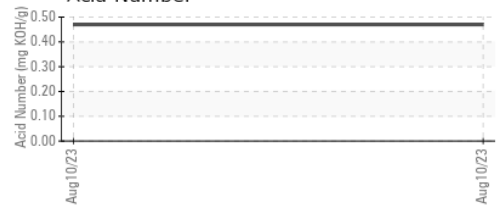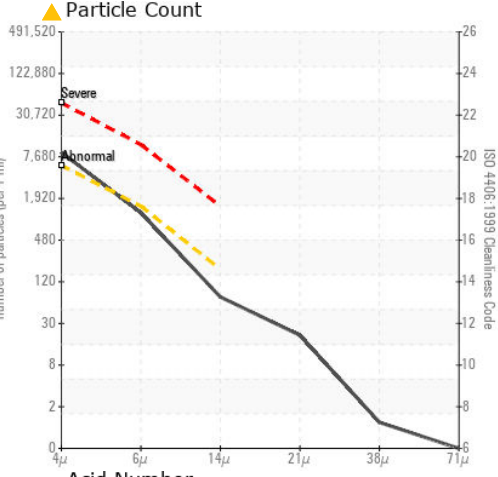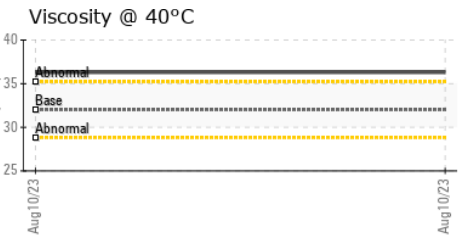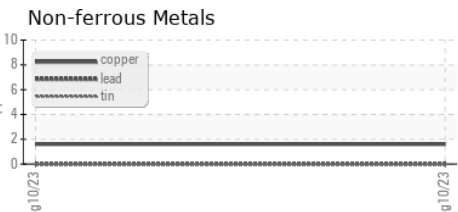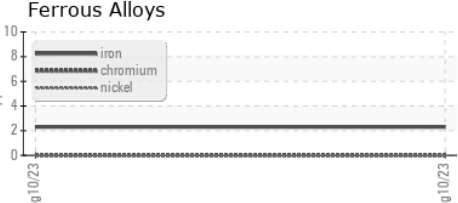

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0521460 **Received** : 16 Aug 2023
Lab Number : 05926702 **Diagnosed** : 18 Aug 2023
Unique Number : 10606649 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KV100, VI)

HIAB USA - BILLERICA
 76 TREBLE COVE RD, SUITE 1
 BILLERICA, MA
 US 01862
 Contact: MATT COPSON
 mathew.copson@hiab.com
 T: (978)483-6566
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)