


# **PROBLEM SUMMARY**


**Oil Cleanliness** 

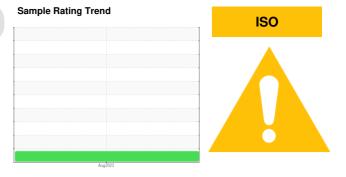

### Machine Id 5521102 (S/N 1121) Component

Compressor Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

### COMPONENT CONDITION SUMMARY

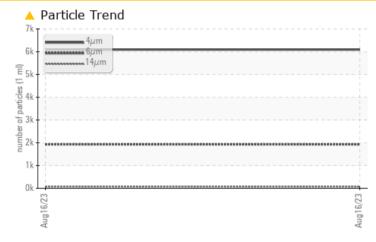

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |            |       |           |  |  |  |  |
|--------------------------|------------|-------|-----------|--|--|--|--|
| Sample Status            |            |       | ATTENTION |  |  |  |  |
| Particles >6µm           | ASTM D7647 | >1300 | <u> </u>  |  |  |  |  |

ISO 4406 (c) >--/17/13 🔺 20/18/13

Customer Id: LAMVER Sample No.: KCPA005955 Lab Number: 05926721 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

| RECOMMENDED ACTIONS |        |      |         |   |  |
|---------------------|--------|------|---------|---|--|
| Action              | Status | Date | Done By | Description   |  |
| Change Fluid        |        |      | ?       | Oil and filter change at the time of sampling has been noted. |  |
| Change Filter       |        |      | ?       | Oil and filter change at the time of sampling has been noted. |  |

HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

# ISO

Machine Id 5521102 (S/N 1121) Component

### Compressor Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

### DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM    | IATION   | method       | limit/base | current           | history1 | history2 |
|------------------|----------|--------------|------------|-------------------|----------|----------|
| Sample Number    |          | Client Info  |            | KCPA005955        |          |          |
| Sample Date      |          | Client Info  |            | 16 Aug 2023       |          |          |
| Machine Age      | hrs      | Client Info  |            | 35760             |          |          |
| Oil Age          | hrs      | Client Info  |            | 12054             |          |          |
| Oil Changed      |          | Client Info  |            | Changed           |          |          |
| Sample Status    |          |              |            | ATTENTION         |          |          |
| WEAR METALS      |          | method       | limit/base | current           | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >50        | 5                 |          |          |
| Chromium         | ppm      | ASTM D5185m  | >10        | 0                 |          |          |
| Nickel           | ppm      | ASTM D5185m  | >3         | 0                 |          |          |
| Titanium         | ppm      | ASTM D5185m  | >3         | <1                |          |          |
| Silver           | ppm      | ASTM D5185m  | >2         | 0                 |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >10        | 4                 |          |          |
| Lead             | ppm      | ASTM D5185m  | >10        | 0                 |          |          |
| Copper           | ppm      | ASTM D5185m  | >50        | 10                |          |          |
| Tin              | ppm      | ASTM D5185m  | >10        | <1                |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | <1                |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | <1                |          |          |
| ADDITIVES        |          | method       | limit/base | current           | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Barium           | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | <1                |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 2                 |          |          |
| Calcium          | ppm      | ASTM D5185m  |            | 0                 |          |          |
| Phosphorus       | ppm      | ASTM D5185m  | 500        | 294               |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 146               |          |          |
| Sulfur           | ppm      | ASTM D5185m  |            | 6098              |          |          |
| CONTAMINANTS     |          | method       | limit/base | current           | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >25        | <1                |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 1                 |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 2                 |          |          |
| Water            | %        | ASTM D6304   | >0.05      | 0.004             |          |          |
| ppm Water        | ppm      | ASTM D6304   | >500       | 45.2              |          |          |
| FLUID CLEANLIN   | ESS      | method       | limit/base | current           | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   |            | 6093              |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | <u> </u>          |          |          |
| Particles >14µm  |          | ASTM D7647   | >80        | 74                |          |          |
| Particles >21µm  |          | ASTM D7647   | >20        | 12                |          |          |
| Particles >38µm  |          | ASTM D7647   | >4         | 0                 |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0                 |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | <b>A</b> 20/18/13 |          |          |
| FLUID DEGRADA    | TION     | method       | limit/base | current           | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 1.5        | 0.82              |          |          |



# **OIL ANALYSIS REPORT**

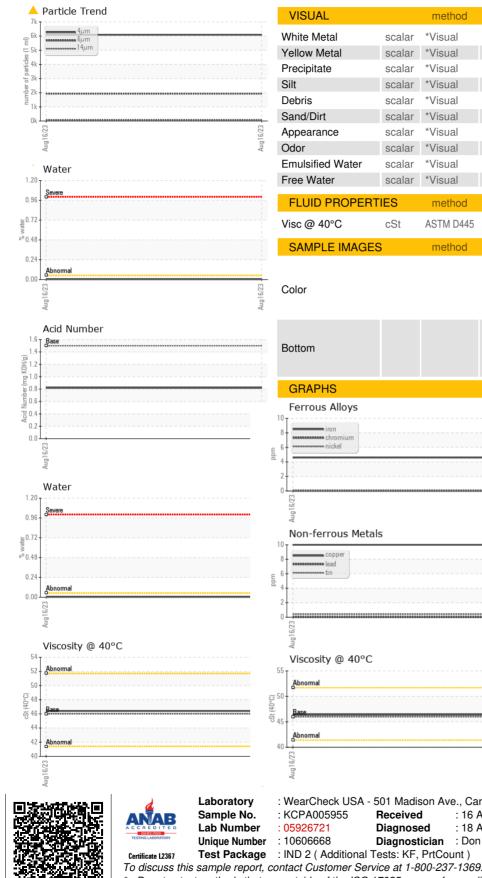

method limit/base history1 history2 current NONE \*Visual NONE scalar \*Visual NONE NONE scalar scalar \*Visua NONE NONE scalar \*Visual NONE NONE \*Visual NONE NONE scalar NONE scalar \*Visual NONE NORML \*Visual NORML scalar \*Visual NORML scalar NORML scalar \*Visual >0.05 NEG scalar \*Visual NEG FLUID PROPERTIES method limit/base current history history2 cSt ASTM D445 46 46.4 SAMPLE IMAGES method limit/base history1 current history2 no image no image no image no imade Particle Count 491,52 122,880 30.720 7,680 Aug16/23 4406 per 1,920 :1999 Cle Non-ferrous Metals 480 120 14 30 Aug 16/2: 214 Viscosity @ 40°C Acid Number oer (mg KOH/g) IN O.S Acid 0.0 Aug16/23 -Aug1 LA MONICAS PIZZA : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 16 Aug 2023 4559 S MAYWOOD AVE : 18 Aug 2023 Diagnosed VERNON, CA Diagnostician : Don Baldridge US 90058 Contact: Service Manager

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)