


Wear

## **OIL ANALYSIS REPORT**





NORMAL

## TEREX AERIAL DEVICE 343 (S/N 2130849197) Component **Hydraulic System** CASTROL AERIAL HYD FLUID 22 (50 GAL)

## DIAGNOSIS SAMPLE INFORMATION ST44062 ST40670 ST39083 Sample Number **Client Info** Recommendation Resample at the next service interval to monitor. 22 Jun 2023 26 Jul 2020 Sample Date Client Info 28 Jun 2021 Client Info 0 Machine Age hrs 0 0 All component wear rates are normal. Oil Age hrs Client Info 0 0 0 Oil Changed Client Info N/A N/A N/A Contamination NORMAL Sample Status ABNORMAL ABNORMAL There is no indication of any contamination in the oil. The amount and size of particulates present in WEAR METALS the system are acceptable. 2 2 ASTM D5185m >20 2 Iron ppm Fluid Condition Chromium ASTM D5185m >10 ppm <1 <1 <1 The AN level is acceptable for this fluid. The 0 condition of the oil is suitable for further service. Nickel ppm ASTM D5185m >10 0 0 Titanium ASTM D5185m 0 ppm <1 <1 0 Silver ppm ASTM D5185m 0 <1 Aluminum ASTM D5185m >10 0 <1 ppm <1 Lead ASTM D5185m >10 0 0 ppm <1 ASTM D5185m 2 2 >75 1 Copper ppm Tin ppm ASTM D5185m >10 0 0 0 Antimony ASTM D5185m 0 0 ppm ---Vanadium ppm ASTM D5185m <1 0 0 Cadmium ASTM D5185m <1 0 0 ppm Boron ppm ASTM D5185m 0 0 <1 0 Barium ASTM D5185m 0 0 ppm Molybdenum ppm ASTM D5185m 0 0 <1 0 0 Manganese ASTM D5185m <1 ppm Magnesium ASTM D5185m 1 1 <1 ppm 61 Calcium ppm ASTM D5185m 40 42 Phosphorus ASTM D5185m 406 390 339 ppm Zinc ASTM D5185m 414 451 419 ppm Sulfur ASTM D5185m 914 856 819 ppm Silicon ASTM D5185m >20 7 <1 ppm <1 Sodium ASTM D5185m 0 ppm 1 <1 >20 2 0 0 Potassium ppm ASTM D5185m 0.062 % >0.1 0.001 0.005 Water ASTM D6304 ppm Water ppm ASTM D6304 >1000 7.2 52.7 627.5 FLUID CLEANLINESS **A** 27209 1337 Particles >4µm ASTM D7647 >5000 ▲ 69269 Particles >6µm ASTM D7647 >1300 126 1713 16769 Particles >14µm ASTM D7647 >160 13 47 **2199** Particles >21µm ASTM D7647 >40 5 12 717 2 0 Particles >38µm ASTM D7647 >10 **1**3 0 0 0 Particles >71um ASTM D7647 >3 **Oil Cleanliness** ISO 4406 (c) >19/17/14 18/14/11 22/18/13 23/21/18 FLUID DEGRADATION

Acid Number (AN) mg KOH/g ASTM D8045


0.378 0.421 Contact/Location: WADE HARRIS - COBMARGA


0.36


Report Id: COBMARGA [WUSCAR] 05926756 (Generated: 08/17/2023 11:44:12) Rev: 1



## **OIL ANALYSIS REPORT**





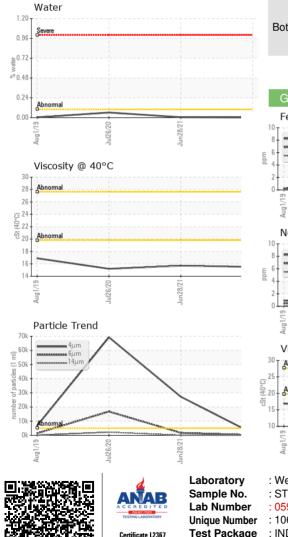

			Parel III and		In the term of the	la la tana 0
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		15.5	15.7	▲ 15.2
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						
Bottom						

