




# OIL ANALYSIS REPORT

Sample Rating Trend

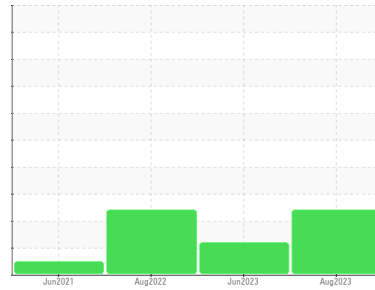

FUEL



Machine Id

**03**

Component

**Diesel Engine**

Fluid

**CHEVRON DELO 400 MULTIGRADE 15W40 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

Light fuel dilution occurring.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0819756</b>   | WC0819776   | WC0723493   |
| Sample Date   | Client Info |             | <b>07 Aug 2023</b> | 19 Jun 2023 | 22 Aug 2022 |
| Machine Age   | mls         | Client Info | <b>301603</b>      | 296470      | 271492      |
| Oil Age       | mls         | Client Info | <b>5000</b>        | 5000        | 5000        |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>ABNORMAL</b>    | ABNORMAL    | ABNORMAL    |

## CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Glycol | WC Method |            | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>19</b>    | 30       | 23       |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | 1        | 1        |
| Nickel   | ppm    | ASTM D5185m >4   | <b>&lt;1</b> | <1       | <1       |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | <1       |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | 0        | <1       |
| Aluminum | ppm    | ASTM D5185m >20  | <b>4</b>     | 6        | ▲ 6      |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 0        | <1       |
| Copper   | ppm    | ASTM D5185m >330 | <b>6</b>     | 6        | 12       |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | 0        | <1       |
| Antimony | ppm    | ASTM D5185m      | <b>---</b>   | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current       | history1 | history2 |
|------------|--------|------------------|---------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 151  | ▲ <b>14</b>   | 24       | 18       |
| Barium     | ppm    | ASTM D5185m 0.4  | <b>0</b>      | 0        | <1       |
| Molybdenum | ppm    | ASTM D5185m 250  | <b>192</b>    | 266      | 270      |
| Manganese  | ppm    | ASTM D5185m      | <b>&lt;1</b>  | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 0    | ▲ <b>450</b>  | 463      | 461      |
| Calcium    | ppm    | ASTM D5185m 2046 | <b>1333</b>   | 1229     | 1276     |
| Phosphorus | ppm    | ASTM D5185m 1043 | <b>620</b>    | 653      | 593      |
| Zinc       | ppm    | ASTM D5185m 943  | <b>762</b>    | 788      | 754      |
| Sulfur     | ppm    | ASTM D5185m 5012 | ▲ <b>2309</b> | 2344     | 1750     |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>16</b>    | 22       | ▲ 27     |
| Sodium    | ppm    | ASTM D5185m     | <b>3</b>     | 2        | 3        |
| Potassium | ppm    | ASTM D5185m >20 | <b>4</b>     | 4        | <1       |
| Fuel      | %      | ASTM D3524 >5   | ▲ <b>2.3</b> | ▲ 5.1    | <1.0     |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0</b>    | 0.1      | 0.1      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>10.5</b> | 12.4     | 14.7     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>20.9</b> | 23.3     | 27.0     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>16.1</b> | 18.6     | 24.6     |
| Base Number (BN) | mg KOH/g | ASTM D2896 12.5 | <b>5.97</b> | 5.69     | 5.34     |











# OIL ANALYSIS REPORT

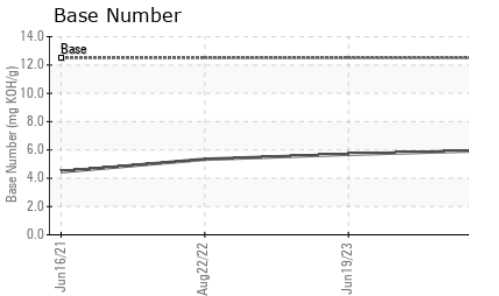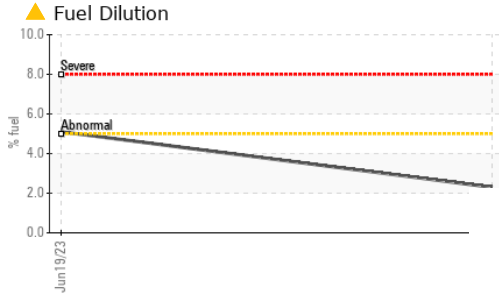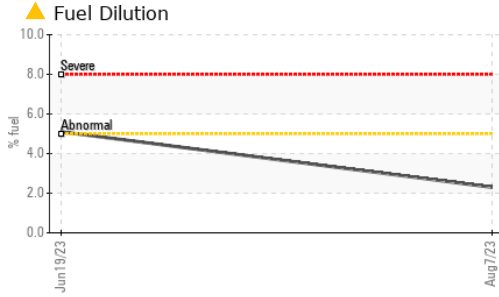

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |      |
|------------------|--------|------------|---------|----------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | ▲ 10.2   | ▲ 9.6    | 11.3 |

### GRAPHS

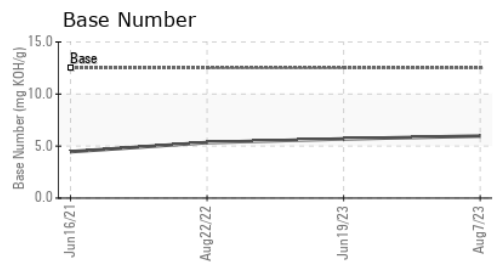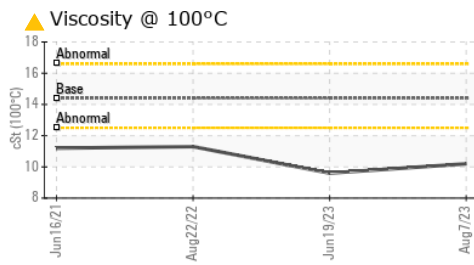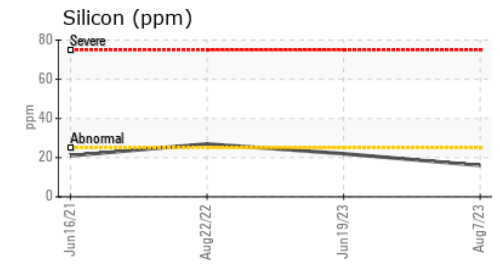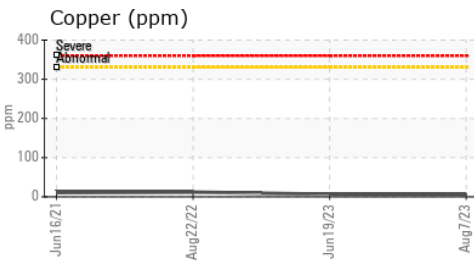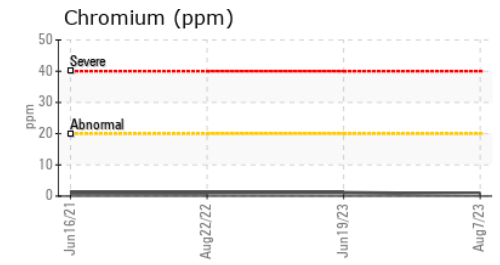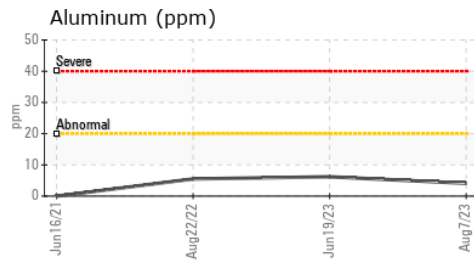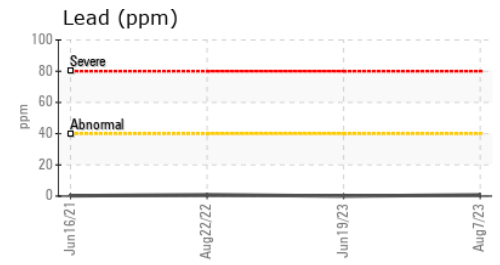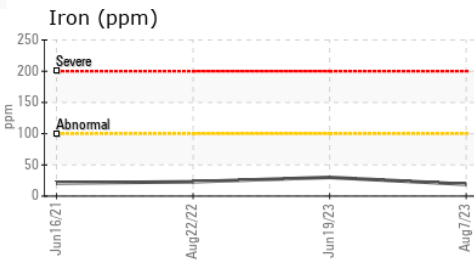

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0819756 **Received** : 16 Aug 2023  
**Lab Number** : 05926830 **Diagnosed** : 18 Aug 2023  
**Unique Number** : 10606777 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: PercentFuel )

**ALLEGHENY DISPOSAL LLC**  
 PO BOX 4  
 GREEN BANK, WV  
 US 24944  
 Contact: SERVICE MANAGER  
 meckmechanic@frontier.com  
 T: (304)456-4541  
 F: (304)456-4540

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)