

# **OIL ANALYSIS REPORT**

#### Area **37371 (TRACE PO 36368)** Machine Id **PAOTS0002-08142023TS2A** Component

Hydraulic System

CASTROL BRAYCO MICRONIC 889 (--- GAL)

# DIAGNOSIS

## Recommendation

No corrective action is recommended at this time.

#### Wear


All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target SAE AS4059 (replaces NAS 1638) cleanliness code. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend



NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC05926941		
Sample Date		Client Info		15 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m	220	0		
Cadmium	ppm	ASTM D5185m		0		
	PPIII			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		2		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		0		
CONTAMINANTS	i i	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	0.001		
ppm Water	ppm	ASTM D6304	>500	14.4		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles 5-15µm	count	*NAS 1638	>8000	2480		
Particles 15-25µm	count	*NAS 1638	>1425	266		
Particles 25-50µm	count	*NAS 1638	>253	105		
Particles 50-100µm	count	*NAS 1638		0		
Particles >100µm	count	*NAS 1638	>8	0		
NAS 1638	Class	*NAS 1638	>5	4		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.04		
	ing itoring	. 10 1 11 000-70		0.04		



0.1

0.00

60

50

4

10

n

Aug15/23

(10°C) 30

ŝ 20

Ab

Viscosity @ 40°C

# **OIL ANALYSIS REPORT**

scalar


White Metal


\*Visual

NONE

NONE



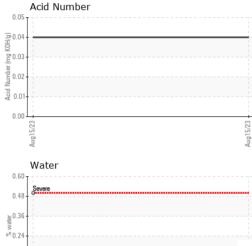

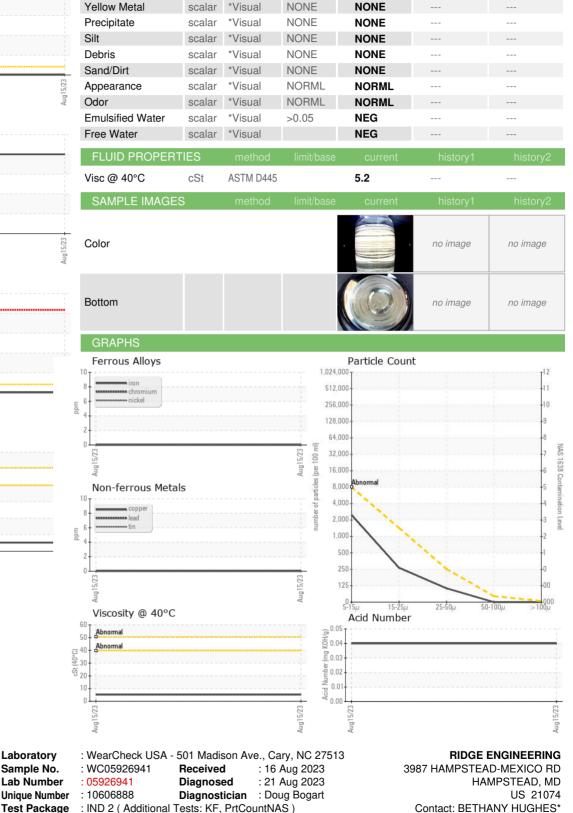

Test Package : IND 2 (Additional Tests: KF, PrtCountNAS) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory

Sample No.

T:

F:

bethany@ridgeeng.com