



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
37372 (TRACE PO 36471)
 Machine Id
JP8TS0001-08142023B
 Component
Hydraulic System
 Fluid
JP8 MIL-DTL-83133 (--- GAL)

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target SAE AS4059 (replaces NAS 1638) cleanliness code. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC05926948	---	---
Sample Date	Client Info	15 Aug 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	0	---	---
Chromium	ppm ASTM D5185m >20	0	---	---
Nickel	ppm ASTM D5185m >20	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m >20	0	---	---
Lead	ppm ASTM D5185m >20	0	---	---
Copper	ppm ASTM D5185m >20	0	---	---
Tin	ppm ASTM D5185m >20	0	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	---	---
Barium	ppm ASTM D5185m	2	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	0	---	---
Magnesium	ppm ASTM D5185m	0	---	---
Calcium	ppm ASTM D5185m	0	---	---
Phosphorus	ppm ASTM D5185m	1	---	---
Zinc	ppm ASTM D5185m	0	---	---
Sulfur	ppm ASTM D5185m	0	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<1	---	---
Sodium	ppm ASTM D5185m	0	---	---
Potassium	ppm ASTM D5185m >20	<1	---	---
Water	% ASTM D6304 >0.05	0.003	---	---
ppm Water	ppm ASTM D6304 >500	35.8	---	---

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles 5-15µm	count *NAS 1638 >8000	3055	---	---
Particles 15-25µm	count *NAS 1638 >1425	244	---	---
Particles 25-50µm	count *NAS 1638 >253	65	---	---
Particles 50-100µm	count *NAS 1638 >45	19	---	---
Particles >100µm	count *NAS 1638 >8	2	---	---
NAS 1638	Class *NAS 1638 >5	4	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.044	---	---




OIL ANALYSIS REPORT

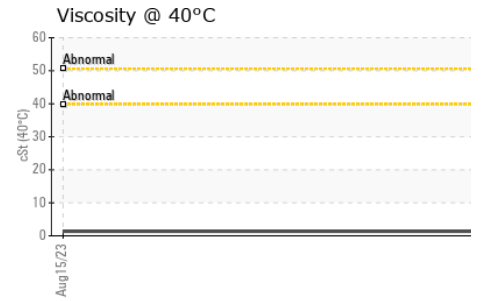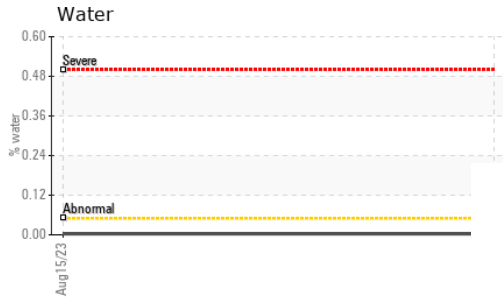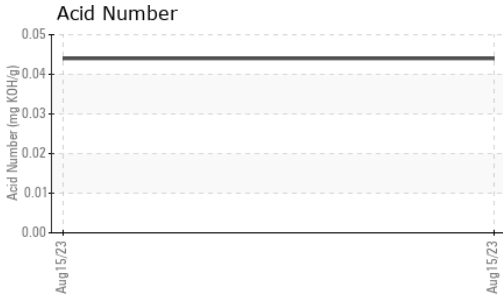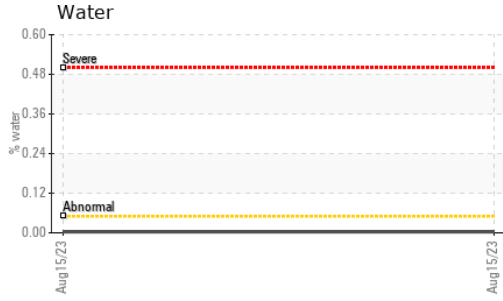






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	1.36	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

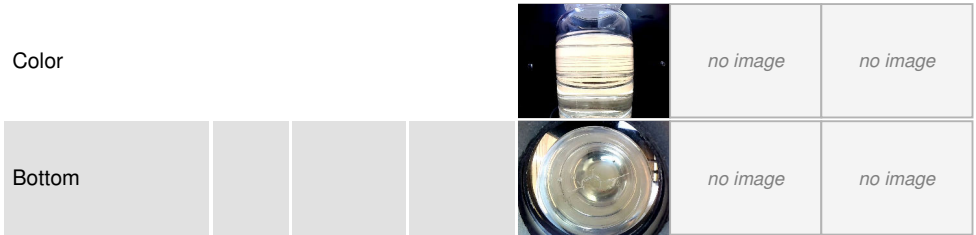

GRAPHS

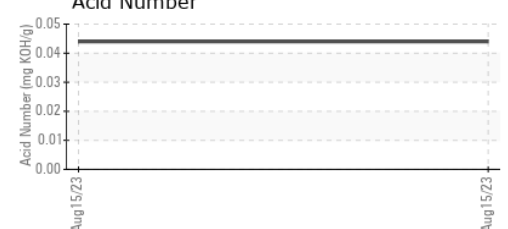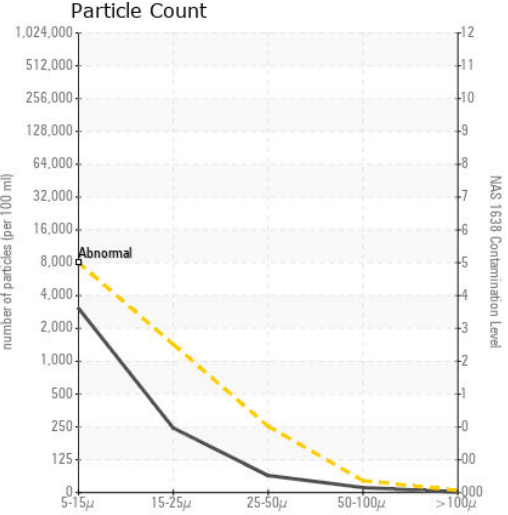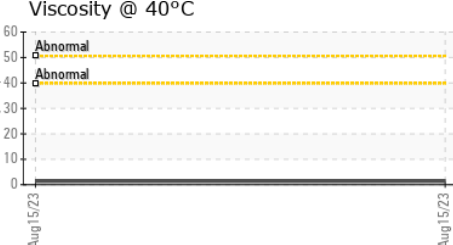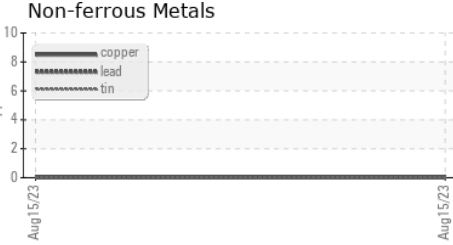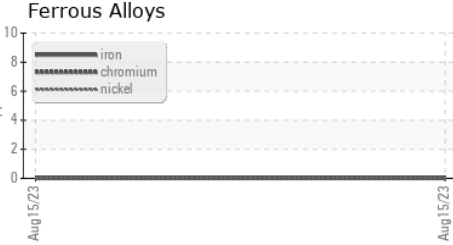

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC05926948 Received : 16 Aug 2023
 Lab Number : 05926948 Diagnosed : 22 Aug 2023
 Unique Number : 10606895 Diagnostician : Doug Bogart
 Test Package : IND 2 (Additional Tests: KF, PrtCountNAS)

RIDGE ENGINEERING
 3987 HAMPSTEAD-MEXICO RD
 HAMPSTEAD, MD
 US 21074
 Contact: BETHANY HUGHES*
 bethany@ridgeeng.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: