

OIL ANALYSIS REPORT

Sample Rating Trend



AMERICAN BALER

Hydraulic System Fluid NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0003113		
Sample Date		Client Info		11 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	7		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		10		
Calcium	ppm	ASTM D5185m		72		
Phosphorus	ppm	ASTM D5185m		344		
Zinc	ppm	ASTM D5185m		409		
Sulfur	ppm	ASTM D5185m		999		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	892		
Particles >6µm		ASTM D7647	>1300	180		
Particles >14µm		ASTM D7647	>160	9		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.19		



OIL ANALYSIS REPORT



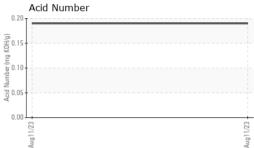

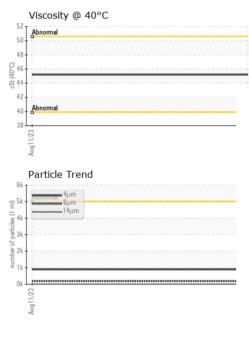

	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
1/23	Appearance	scalar	*Visual	NORML	NORML		
Aug11/23	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.05	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPE	RTIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445		45.2		
	SAMPLE IMAG	ES	method	limit/base	current	history1	history2
Aug11/23	Color				a contraction of the second seco	no image	no image
	Bottom					no image	no image
	GRAPHS						
	Ferrous Alloys			491,520	Particle Count	t	T 26
	iron			101,320			120
	c 6+ nickel			122,880			-24
				30,720	Severe		-22
	2-						
					Abnormal		-20
	Aug 1 1/23			Aug11/23 s (per 1 ml			-18
	Au			Au les (p			
	Non-ferrous Me	tals		pitred 480			-16
	Non-ferrous Me	tals		120 480		S	16
	10 8 ead	tals		jo Jag 120		•	-16 -14
		tals		9 480 6 34 9 480 120 30			-16 -14 -12
	10 8 6 6 10 10 10 10 10 10 10 10 10 10 10 10 10	tals					-16 -14 -12 -10
	10 8 6 4 2 0			8			-12
	10 8 6 4 2 0			8			-12
	10 8 6 4 2 0 EZZILI Band 10 10 10 10 10 10 10 10 10 10			30 8 27/110 8		144 214	-12 -10 -8 -6
	Viscosity @ 40°			30 8 57/11/0ny 0	Acid Number	14μ 21μ	-12
	10 10 10 10 10 10 10 10 10 10			30 8 57/11/0ny 0	Acid Number	14μ 21μ	-12 -10 -8 -6
	Viscosity @ 40°			30 8 57/11/0ny 0	Acid Number	14μ 21μ	-12 -10 -8 -6
	Viscosity @ 40°			30 8 57/11/0ny 0	Acid Number	14µ 21µ	-12 -10 -8 -6
	10 10 10 10 10 10 10 10 10 10			30 8 57/11/0ny 0	Acid Number	14μ 21μ	-8
	Viscosity @ 40°			30 8 57/11/0ny 0	Acid Number	14μ 21μ	-12 -10 -8 -6
	10 10 10 10 10 10 10 10 10 10			30 8 8 9 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12	Acid Number	14μ 21μ	12
	10 10 10 10 10 10 10 10 10 10			30 8 57/11/0ny 0	Acid Number	14μ 21μ	-12 -10 -8 -6
	10 10 10 10 10 10 10 10 10 10	C	son Ave., C I : 17 ed : 18	300 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	Acid Number	9201 WYOMIN MINN	12 10 38µ 71µ SHRED-I

To discuss this sample repor * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - SHRMIN

F: