

## **OIL ANALYSIS REPORT**

#### Area **Powerhouse** Machine Id **#1 Air Compressor** Component

## Air Compressor

### MOBIL DTE OIL HVY MEDIUM (23)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

-											1									-			

Sample Rating Trend



NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0776601		
Sample Date		Client Info		11 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m		0		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m	~ 1	۰ <1		
Silver	ppm	ASTM D5185m		0		
Aluminum			>10	۰ <1		
	ppm			<1		
Lead	ppm	ASTM D5185m	>20			
Copper	ppm	ASTM D5185m		1		
Tin	ppm	ASTM D5185m	>5	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		6		
Phosphorus	ppm	ASTM D5185m		127		
Zinc	ppm	ASTM D5185m		84		
Sulfur	ppm	ASTM D5185m		1284		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.6	0.001		
ppm Water	ppm	ASTM D6304	>6000	14.0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2785		
Particles >6µm		ASTM D7647	>2500	540		
Particles >14µm		ASTM D7647	>320	28		
Particles >21µm		ASTM D7647	>80	5		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	0 19/16/12		
	TION	( )				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN) mg KC

mg KOH/g ASTM D8045

0.15



# **OIL ANALYSIS REPORT**

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

66.0

Particle Count

Acid Number

491,52

122,88

30.72

7.68

480

120

31

KOH/g)

na l

Acid

Ē 0.05

0.00

Aug1

per 1 1,92 no image

no image


no image

no image

4406

:1999 Cle

14

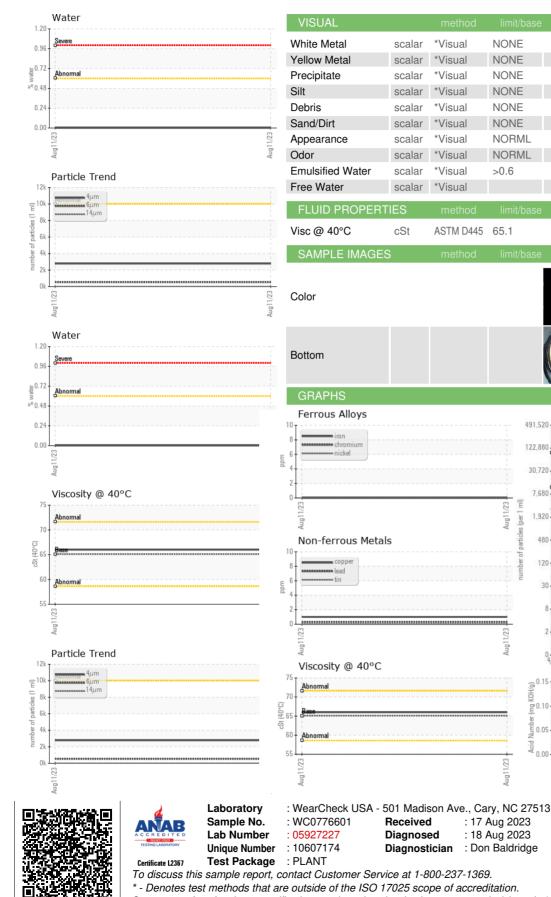

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: MARC-ANDRE HUBERT

CASCADES CONTAINERBOARD PACKAGING - BEARPACK PROJECT

Contact: MARC-ANDRE HUBERT

marc-andre hubert@cascades.com

10026 OLD RIDGE ROAD

ASHLAND, VA

US 23005

T:

F:

21µ