

## **OIL ANALYSIS REPORT**

# Paper Machine #3 Vacuum Blower

Component **Journal Bearing** MOBIL DTE 10 EXCEL 32 (195 GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







NORMAL


| SAMPLE INFORM    | IATION   | method       | limit/base | current     | history1 | history2 |
|------------------|----------|--------------|------------|-------------|----------|----------|
| Sample Number    |          | Client Info  |            | WC0776549   |          |          |
| Sample Date      |          | Client Info  |            | 11 Aug 2023 |          |          |
| Machine Age      | hrs      | Client Info  |            | 0           |          |          |
| Oil Age          | hrs      | Client Info  |            | 0           |          |          |
| Oil Changed      |          | Client Info  |            | N/A         |          |          |
| Sample Status    |          |              |            | NORMAL      |          |          |
| WEAR METALS      |          | method       | limit/base | current     | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >60        | 0           |          |          |
| Chromium         | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Nickel           | ppm      | ASTM D5185m  | >20        | 0           |          |          |
| Titanium         | ppm      | ASTM D5185m  |            | <1          |          |          |
| Silver           | ppm      | ASTM D5185m  |            | 0           |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >4         | <1          |          |          |
| Lead             | ppm      | ASTM D5185m  | >250       | 0           |          |          |
| Copper           | ppm      | ASTM D5185m  | >125       | <1          |          |          |
| Tin              | ppm      | ASTM D5185m  | >80        | 0           |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | <1          |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0           |          |          |
| ADDITIVES        |          | method       | limit/base | current     | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 0           |          |          |
| Barium           | ppm      | ASTM D5185m  |            | 0           |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0           |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | <1          |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 3           |          |          |
| Calcium          | ppm      | ASTM D5185m  | 120        | 86          |          |          |
| Phosphorus       | ppm      | ASTM D5185m  | 475        | 143         |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 8           |          |          |
| Sulfur           | ppm      | ASTM D5185m  | 1275       | 728         |          |          |
| CONTAMINANTS     |          | method       | limit/base | current     | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >50        | 2           |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 1           |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 1           |          |          |
| Water            | %        | ASTM D6304   | >2         | 0.003       |          |          |
| ppm Water        | ppm      | ASTM D6304   |            | 28.2        |          |          |
| FLUID CLEANLIN   | IESS     | method       | limit/base | current     | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   | >10000     | 434         |          |          |
| Particles >6µm   |          | ASTM D7647   | >2500      | 88          |          |          |
| Particles >14µm  |          | ASTM D7647   | >160       | 8           |          |          |
| Particles >21µm  |          | ASTM D7647   | >40        | 3           |          |          |
| Particles >38µm  |          | ASTM D7647   | >10        | 0           |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0           |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >20/18/14  | 16/14/10    |          |          |
| FLUID DEGRADA    |          | method       | limit/base | current     | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   |            | 0.15        |          |          |




## **OIL ANALYSIS REPORT**

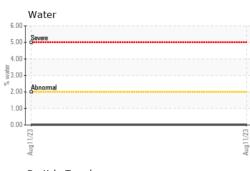

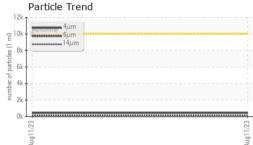

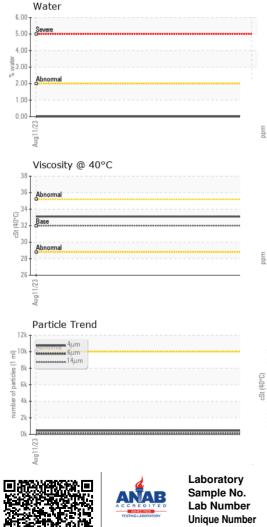

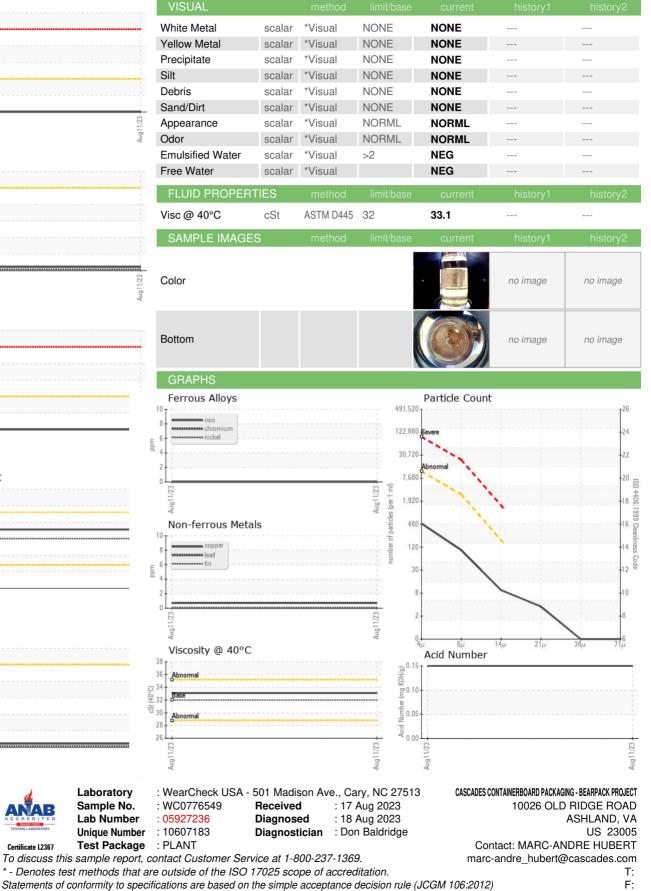

Certificate L2367