



# PROBLEM SUMMARY

Sample Rating Trend


ISO



Area  
**Paper Machine**  
 Machine Id  
**Refiner #1**  
 Component  
**Bearing Lube**  
 Fluid  
**MOBIL SHC 630 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

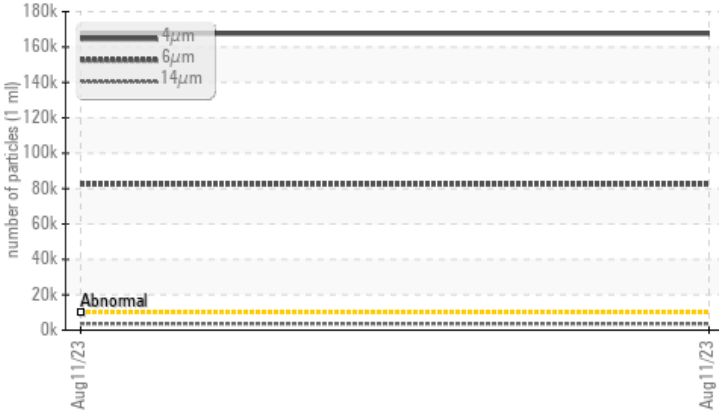

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ISO 4406 (c)	ABNORMAL	---	---
Particles >4µm	>10000	▲ 167604	---	---	---
Particles >6µm	>2500	▲ 82439	---	---	---
Particles >14µm	>160	▲ 3640	---	---	---
Particles >21µm	>40	▲ 488	---	---	---
Oil Cleanliness	>20/18/14	▲ 25/24/19	---	---	---

Customer Id: CASASH  
 Sample No.: WC0776563  
 Lab Number: 05927241  
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area  
**Paper Machine**  
 Machine Id  
**Refiner #1**  
 Component  
**Bearing Lube**  
 Fluid  
**MOBIL SHC 630 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0776563</b>	---	---
Sample Date	Client Info		<b>11 Aug 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>41</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >30	<b>2</b>	---	---
Copper	ppm	ASTM D5185m >17	<b>5</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---





ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>469</b>	---	---
Zinc	ppm	ASTM D5185m	<b>2</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>735</b>	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>13</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Water	%	ASTM D6304 >0.2	<b>0.005</b>	---	---
ppm Water	ppm	ASTM D6304 >2000	<b>51.2</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ <b>167604</b>	---	---
Particles >6µm	ASTM D7647	>2500	▲ <b>82439</b>	---	---
Particles >14µm	ASTM D7647	>160	▲ <b>3640</b>	---	---
Particles >21µm	ASTM D7647	>40	▲ <b>488</b>	---	---
Particles >38µm	ASTM D7647	>10	<b>2</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/14	▲ <b>25/24/19</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.42</b>	---	---

# OIL ANALYSIS REPORT

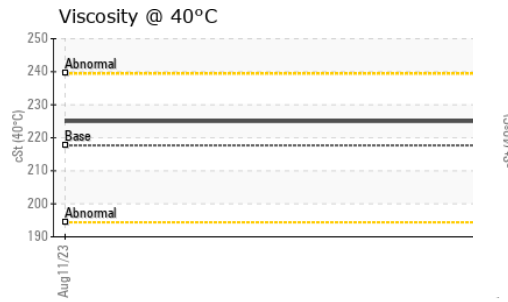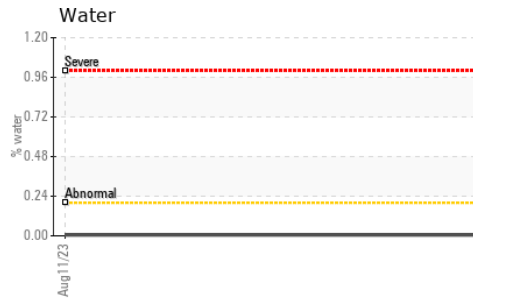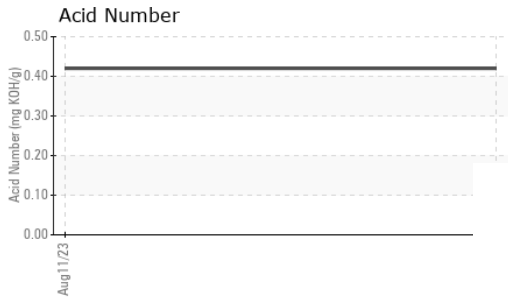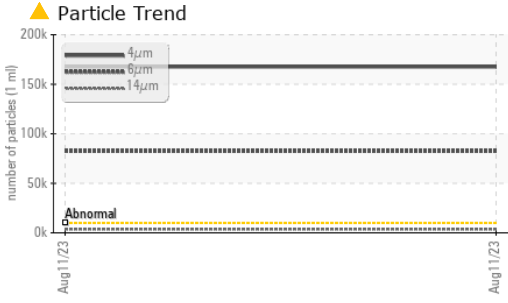





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	217.7	225	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

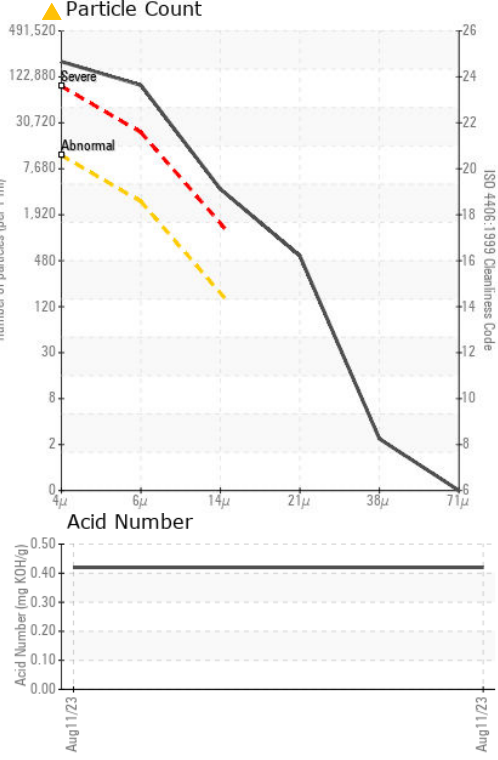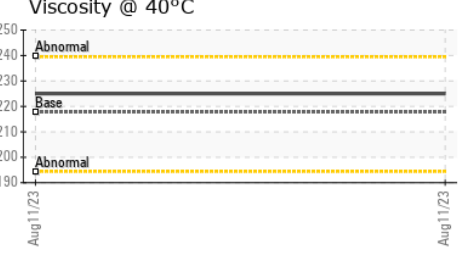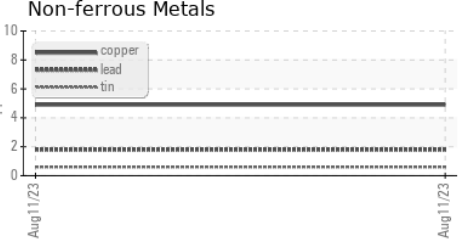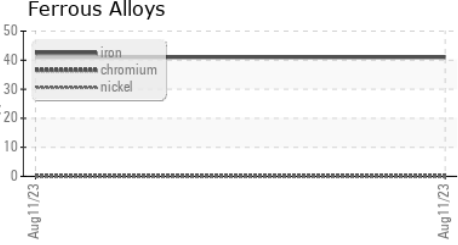

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0776563 **Received** : 17 Aug 2023  
**Lab Number** : 05927241 **Diagnosed** : 18 Aug 2023  
**Unique Number** : 10607188 **Diagnostician** : Don Baldrige  
**Test Package** : PLANT

CASCADES CONTAINERBOARD PACKAGING - BEARPACK PROJECT  
 10026 OLD RIDGE ROAD  
 ASHLAND, VA  
 US 23005  
 Contact: MARC-ANDRE HUBERT  
 marc-andre\_hubert@cascades.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)