

# **PROBLEM SUMMARY**

Sample Rating Trend


**WATER** 


# KAESER SK 15 5845403 (S/N 1020)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# **COMPONENT CONDITION SUMMARY**

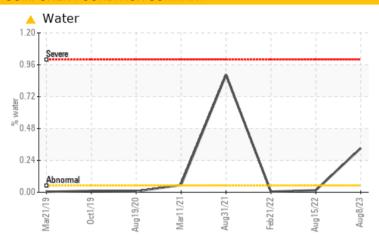

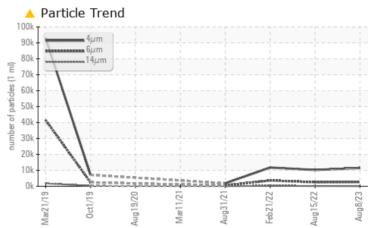

## RECOMMENDATION

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL				
Water	%	ASTM D6304	>0.05	<b>△</b> 0.332	0.015	0.005				
ppm Water	ppm	ASTM D6304	>500	<b>▲</b> 3320	154.7	55.0				
Particles >6µm		ASTM D7647	>1300	<b>^</b> 2694	<u>\$\text{2535}\$</u>	<u>▲</u> 3615				
Particles >14µm		ASTM D7647	>80	<b>102</b>	<u>▲</u> 142	<b>▲</b> 369				
Particles >21µm		ASTM D7647	>20	<u>^</u> 23	<b>▲</b> 34	<b>△</b> 93				
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>21/19/14</b>	21/19/14	<b>1</b> 9/16				

**Customer Id: TRAROCTX** Sample No.: KCPA005673 Lab Number: 05927259 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

## 15 Aug 2022 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 21 Feb 2022 Diag: Angela Borella

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 31 Aug 2021 Diag: Don Baldridge

WATER




We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition. All component wear rates are normal. There is a high concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid.





# **OIL ANALYSIS REPORT**

Sample Rating Trend



WATER

WATER

Machine Id

# KAESER SK 15 5845403 (S/N 1020)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# DIAGNOSIS

#### Recommendation

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil.

## **Fluid Condition**

The AN level is acceptable for this fluid.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
		Client Info	minu bacc		KCP50529	KCP41185
Sample Number		00		KCPA005673		
Sample Date		Client Info		08 Aug 2023	15 Aug 2022	21 Feb 2022
Machine Age	hrs	Client Info		35559	32262	30757
Oil Age	hrs	Client Info		0	1504	0
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	2	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	<1	2	2
Lead	ppm	ASTM D5185m	>10	<1	0	<1
Copper	ppm	ASTM D5185m	>50	10	6	15
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES	PP	method	limit/base	-		
			IIIIIIVDase	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	11	21	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		5	14	8
Zinc	ppm	ASTM D5185m		34	29	0
Sulfur	ppm	ASTM D5185m		20714	18388	15854
CONTAMINANTS	1	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	4	0
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Water	%	ASTM D6304	>0.05	<b>△</b> 0.332	0.015	0.005
ppm Water	ppm	ASTM D6304	>500	▲ 3320	154.7	55.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		11466	10235	11754
Particles >6µm		ASTM D7647	>1300	<b>^</b> 2694	<u>\$\times\$ 2535</u>	<u>▲</u> 3615
Particles >14µm		ASTM D7647	>80	<b>102</b>	<u> </u>	▲ 369
Particles >21µm		ASTM D7647	>20	<b>4</b> 23	<u></u> 34	<b>△</b> 93
Particles >38µm		ASTM D7647	>4	1	1	<u> 11</u>
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/19/14	<u>^</u> 21/19/14	<b>△</b> 19/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



# **OIL ANALYSIS REPORT**



Test Package : IND 2 ( Additional Tests: KF, PrtCount )

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Certificate L2367

T: F:

Contact: Service Manager