


## **PROBLEM SUMMARY**

# KAESER AS 31 1430868 (S/N 3112126)

Compressor

#### KAESER SIGMA (OEM) M-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

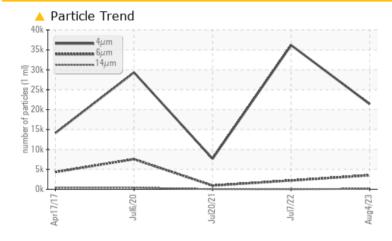

#### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# Sample Rating Trend ISO

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	ATTENTION	NORMAL		
Particles >6µm	ASTM D7647	>1300	<u> </u>	<u> </u>	923		
Particles >14µm	ASTM D7647	>80	🔺 141	18	29		
Particles >21µm	ASTM D7647	>20	<u> </u>	4	5		
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>A</b> 22/19/14	🔺 22/18/11	17/12		

Customer Id: JMFARL Sample No.: KCP35043 Lab Number: 05927273 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED	RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description			
Change Fluid			?	Oil and filter change at the time of sampling has been noted.			
Change Filter			?	Oil and filter change at the time of sampling has been noted.			

#### HISTORICAL DIAGNOSIS



#### 07 Jul 2022 Diag: Jonathan Hester

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

#### 20 Jul 2021 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### 06 Jul 2020 Diag: Doug Bogart



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







## **OIL ANALYSIS REPORT**

#### Machine Id KAESER AS 31 1430868 (S/N 3112126) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

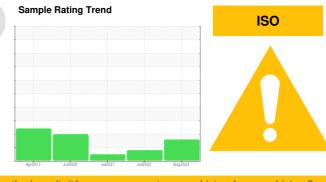


SAMPLE INFORM		method	limit/base	ourropt	historyd	history?
	ATION		inniv base	current	history1	history2
Sample Number		Client Info		KCP35043	KCP40173	KCP41513
Sample Date		Client Info		04 Aug 2023	07 Jul 2022	20 Jul 2021
Machine Age	hrs	Client Info		36347	0	36347
Oil Age	hrs	Client Info		0	0	3000
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	2	1
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	<1	1	2
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	7	3	3
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	42	51	36
Calcium	ppm	ASTM D5185m		0	0	4
Phosphorus	ppm	ASTM D5185m	0	2	4	17
Zinc	ppm	ASTM D5185m	0	2	8	0
Sulfur	ppm	ASTM D5185m	23500	_ 21805	21692	18323
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>25	2	4	<1
Sodium	ppm	ASTM D5185m	0.6	17	16	6
Potassium	ppm	ASTM D5185m		2	2	<1
Water	%	ASTM D6304		0.007	0.019	0.026
ppm Water	ppm	ASTM D6304	>500	74.7	192.9	261.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		21378	36173	7664
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	923
Particles >14µm		ASTM D7647	>80	<u> </u>	18	29
Particles >21µm		ASTM D7647	>20	<u> </u>	4	5
Particles >38µm		ASTM D7647	>4	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 22/19/14	<u>22/18/11</u>	17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36	0.43	0.396
·00·10) Devis 1	- 0				0	


Report Id: JMFARL [WUSCAR] 05927273 (Generated: 08/18/2023 09:36:12) Rev: 1

Contact/Location: ? ? - JMFARL




# **OIL ANALYSIS REPORT**

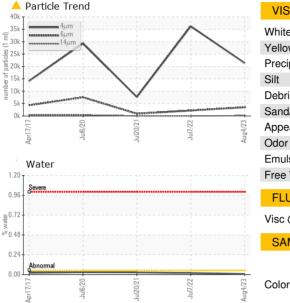


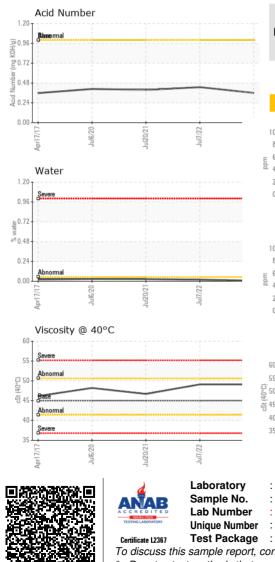

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	<b>FIES</b>	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.1	49.1	46.7
SAMPLE IMAGE	S	method	limit/base	current	history1	history2



Bottom

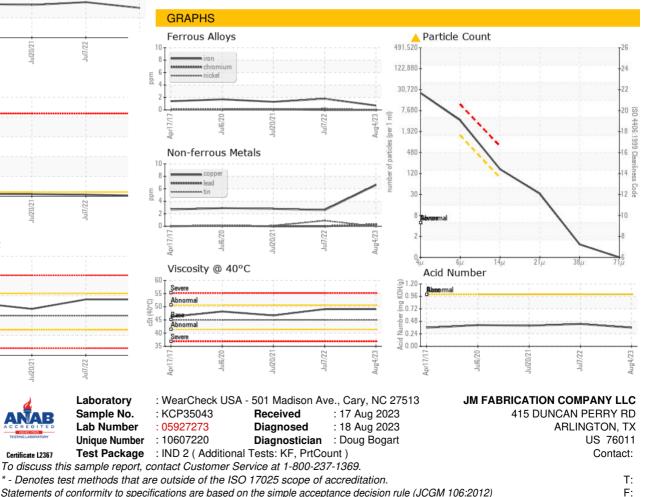

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - JMFARL