

# **OIL ANALYSIS REPORT**

Sample Rating Trend







#### Machine Id V3004U16308 Component

Compressor

Fluid

## INGERSOLL-RAND ULTRA PLUS COOLANT (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM    | MATION   | method      | limit/base | current     | history1      | history2      |
|------------------|----------|-------------|------------|-------------|---------------|---------------|
| Sample Number    |          | Client Info |            | WC0811715   |               |               |
| Sample Date      |          | Client Info |            | 09 Aug 2023 |               |               |
| Machine Age      | hrs      | Client Info |            | 6751        |               |               |
| Oil Age          | hrs      | Client Info |            | 0           |               |               |
| Oil Changed      |          | Client Info |            | Not Changd  |               |               |
| Sample Status    |          |             |            | NORMAL      |               |               |
| WEAR METALS      |          | method      | limit/base | current     | history1      | history2      |
| Iron             | ppm      | ASTM D5185m | >50        | 0           |               |               |
| Chromium         | ppm      | ASTM D5185m | >10        | 0           |               |               |
| Nickel           | ppm      | ASTM D5185m |            | 0           |               |               |
| Titanium         | ppm      | ASTM D5185m |            | 0           |               |               |
| Silver           | ppm      | ASTM D5185m |            | 0           |               |               |
| Aluminum         | ppm      | ASTM D5185m | >25        | 1           |               |               |
| Lead             | ppm      | ASTM D5185m | >25        | 0           |               |               |
| Copper           | ppm      | ASTM D5185m | >50        | 0           |               |               |
| Tin              | ppm      | ASTM D5185m | >15        | <1          |               |               |
| Vanadium         | ppm      | ASTM D5185m |            | 0           |               |               |
| Cadmium          | ppm      | ASTM D5185m |            | 0           |               |               |
| ADDITIVES        |          | method      | limit/base | current     | history1      | history2      |
| Boron            | ppm      | ASTM D5185m |            | 0           |               |               |
| Barium           | ppm      | ASTM D5185m |            | 51          |               |               |
| Molybdenum       | ppm      | ASTM D5185m |            | 0           |               |               |
| Manganese        | ppm      | ASTM D5185m |            | <1          |               |               |
| Magnesium        | ppm      | ASTM D5185m |            | 4           |               |               |
| Calcium          | ppm      | ASTM D5185m |            | 2           |               |               |
| Phosphorus       | ppm      | ASTM D5185m |            | 76          |               |               |
| Zinc             | ppm      | ASTM D5185m |            | 134         |               |               |
| Sulfur           | ppm      | ASTM D5185m |            | 488         |               |               |
| CONTAMINANTS     | \$       | method      | limit/base | current     | history1      | history2      |
| Silicon          | ppm      | ASTM D5185m | >25        | <1          |               |               |
| Sodium           | ppm      | ASTM D5185m |            | 15          |               |               |
| Potassium        | ppm      | ASTM D5185m | >20        | 1           |               |               |
| FLUID DEGRADA    | ATION    | method      | limit/base | current     | history1      | history2      |
| Acid Number (AN) | mg KOH/g | ASTM D8045  |            | 0.46        |               |               |
| VISUAL           |          | method      | limit/base | current     | history1      | history2      |
| White Metal      | scalar   | *Visual     | NONE       | NONE        |               |               |
| Yellow Metal     | scalar   | *Visual     | NONE       | NONE        |               |               |
| Precipitate      | scalar   | *Visual     | NONE       | NONE        |               |               |
| Silt             | scalar   | *Visual     | NONE       | NONE        |               |               |
| Debris           | scalar   | *Visual     | NONE       | NONE        |               |               |
| Sand/Dirt        | scalar   | *Visual     | NONE       | NONE        |               |               |
| Appearance       | scalar   | *Visual     | NORML      | NORML       |               |               |
| Odor             | scalar   | *Visual     | NORML      | NORML       |               |               |
| Emulsified Water | scalar   | *Visual     | >0.1       | NEG         |               |               |
| Free Water       | scalar   | *Visual     |            | NEG         |               |               |
| 16:05:09) Rev: 1 |          |             | Co         |             | Service Manag | er - SUEMINMN |



# **OIL ANALYSIS REPORT**

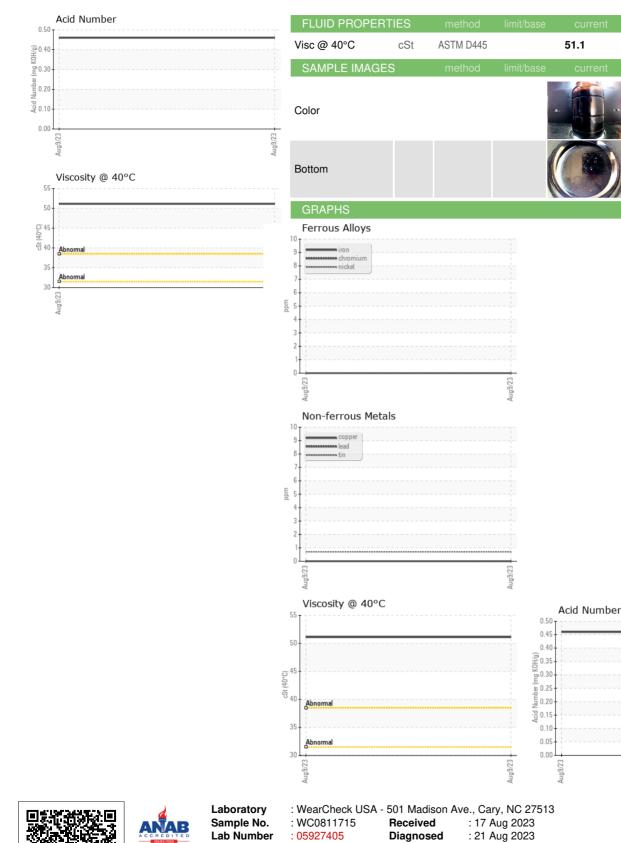

SUEZ WTS 5951 CLEARWATER DR MINNETONKA, MN US 55343 Contact: Service Manager

Certificate 12367 Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Unique Number : 10607352

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician : Jonathan Hester

Contact/Location: Service Manager - SUEMINMN

no image

no image

no image

no image